

SPECIFICATION

- Light Source LED Module (Mounted)
 - Light Distribution Narrow(N), Medium(M)
 - Body White(W), Matte black(M), Silver(S)
 - Tilt Angle 90°
 - Pan Angle 360°
 - Dimming method 0-10V
 - Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
 - Input Current 0.155A (Dedicated driver input voltage, 220V input)
0.143A (Dedicated driver input voltage, 240V input)
 - Power Consumption 30.7W (Included dedicated driver, 220V input)
30.9W (Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
 - Fixture Input Voltage 38.6V
 - Fixture Input Current 0.7A
 - Dimming signal input current 2mA
 - Weight 700g (Driver weight is included)
 - Safety wire included

PRODUCT CODE

SL-910DF/Z102/N-M/R27B/VC-SC/W
SL-910DF/Z102/N-M/R30B/VC-SC/W
SL-910DF/Z102/N-M/R35B/VC-SC/W
SL-910DF/Z102/N-M/R40B/VC-SC/W


SL-910DF/Z102/N-M/R27B/MC-SC/M
SL-910DF/Z102/N-M/R30B/MC-SC/M
SL-910DF/Z102/N-M/R35B/MC-SC/M
SL-910DF/Z102/N-M/R40B/MC-SC/M

OPTION (1 filter attachable)

Diffusion Lens SA-3DL03
Wide Diffusion Lens SA-3DF01
Spread Lens SA-3SP01
Honeycomb Louver SA-3HC02
Conversion Filter SA-3CV02~03
Edge control Filter SA-3EC01
Sharpener SA-3SH01 (Discontinued)
(available only for narrow distribution)


⑪ W: 170, D: 54, H: 28 190g

with terminal block for dimming signal wire
electric wire specified: CPEV-1P Ø0.9~Ø1.2

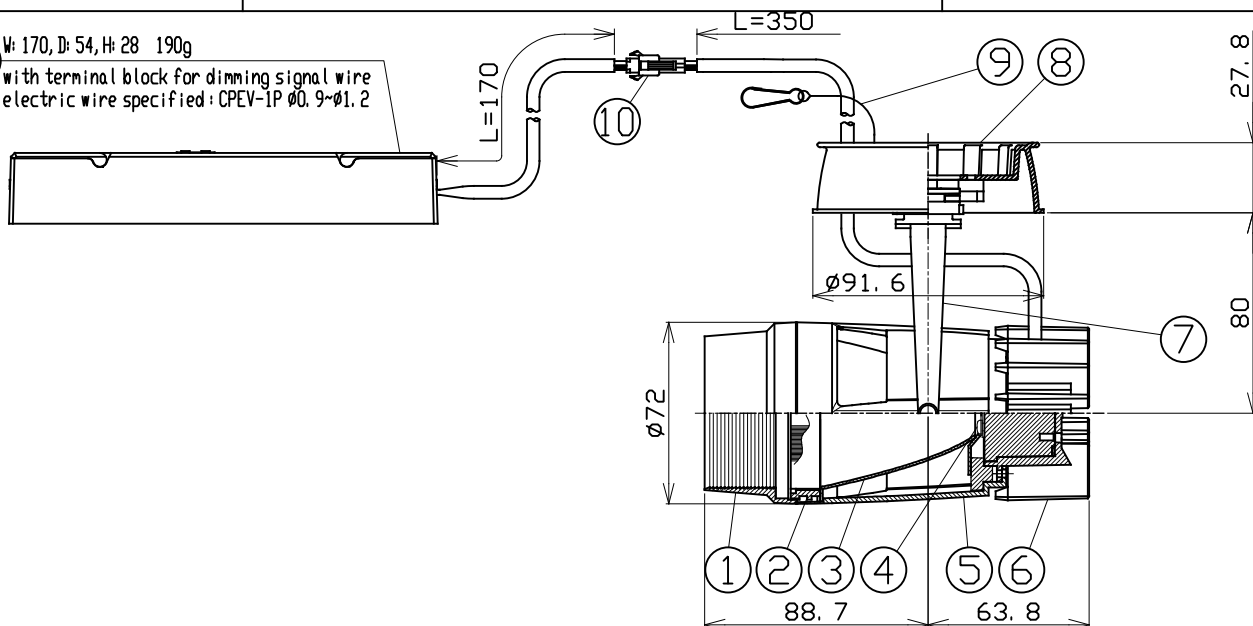

PARTS	MATERIAL	REMARK
1 Hood	ADC	Acrylic Baking Finish
2 Unit Ring	ADC	Acrylic Baking Finish
3 Reflector	Aluminum	
4 LED Module		
5 Body	ADC	Acrylic Baking Finish
6 Socket Holder	ADC	Acrylic Baking Finish
7 Arm	Iron Plate	Acrylic Baking Finish
8 Cone	ADC	Acrylic Baking Finish
9 Safety Wire	Stainless Steel	
10 Safety Connector	Resin	
11 Dedicated Driver		0-10V control dimming system

CIRCUIT DIAGRAM

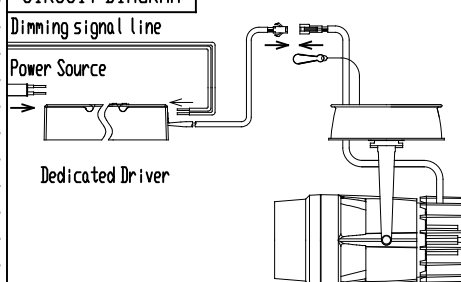


ATTENTION

- Danger! Do not remodel the fixture.
- Because there are variations in the LEDs, emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- To remove the hood, remove it with the hood facing down.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only.
- When connecting to the electric circuit, calculate the capacity in accordance with JIS C8155 standard.
- Use within 0~35°C ambient temperature range.
- Do not cover the fixture with a heat insulator etc.
- Keep distance of the fixture and objects 0.2m or more.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.
- The fixture is ceiling mounting exclusive use. Do not mount inclined ceilings or walls.
- Be sure to connect a safety wire to the fixture and mounting frame.

Driver-side's connector

Fixture-side's connector



Make sure they are connected properly.