

**SPECIFICATION**

- Light Source LED Module (Mounted)
  - Light Distribution Narrow(N), Medium(M)
  - Cone White Cone(WC), Matte black Cone(MC), Chrome Cone(CC)
  - Frame White(SWF), Matte black(SMF)
  - Dimming method 0-10V
  - Input Voltage 220V±6%, 240V±6% (Dedicated driver input voltage)
  - Input current 0.079A (Dedicated driver input voltage, 220V input), 0.076A (Dedicated driver input voltage, 240V input)
  - Power Consumption 15.3W (Included dedicated driver, 220V input), 15.5W (Included dedicated driver, 240V input)
- \*The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current ( 50/60Hz shared)
  - Fixture Input voltage 32.6V
  - Fixture Input current 0.38A
  - Dimming signal input current 2mA
  - Weight 320g (Includes dedicated driver)
  - Safety Wire is attached
  - tool for tilt lock is equipped


**PRODUCT CODE**

MMP-060A/VC/SWF/N・M/10A24/Z2/3  
MMP-060A/VC/SWF/N・M/10A27/Z2/3  
MMP-060A/VC/SWF/N・M/10A30/Z2/3  
MMP-060A/VC/SWF/N・M/10A35/Z2/3  
MMP-060A/VC/SWF/N・M/10A40/Z2/3  
MMP-060A/MC/SWF・SMF/N・M/10A24/Z2/3  
MMP-060A/MC/SWF・SMF/N・M/10A27/Z2/3  
MMP-060A/MC/SWF・SMF/N・M/10A30/Z2/3  
MMP-060A/MC/SWF・SMF/N・M/10A35/Z2/3  
MMP-060A/MC/SWF・SMF/N・M/10A40/Z2/3  
MMP-060A/CC/SWF・SMF/N・M/10A24/Z2/3  
MMP-060A/CC/SWF・SMF/N・M/10A27/Z2/3  
MMP-060A/CC/SWF・SMF/N・M/10A30/Z2/3  
MMP-060A/CC/SWF・SMF/N・M/10A35/Z2/3  
MMP-060A/CC/SWF・SMF/N・M/10A40/Z2/3

**OPTION**


Full Diffuser Lens Filter MLA-060/DF01  
Semi Diffuser Lens Filter MLA-060/DS01  
Full Spread Lens Filter MLA-060/SF01  
Semi Spread Lens Filter MLA-060/SS01  
Edge Control Lens Filter MLA-060/EC01  
Sharpener Lens MLA-060/SH01  
(available only for narrow distribution)

[mm]

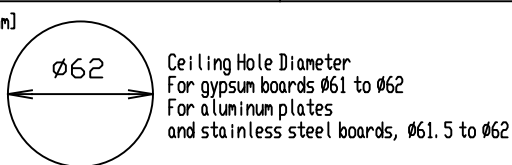

Ceiling Hole Diameter

- ⑪ W:178, D:46, H:22 140g  
with terminal block for dimming signal wire  
electric wire specified: CPEV-1P Ø0.9~Ø1.2

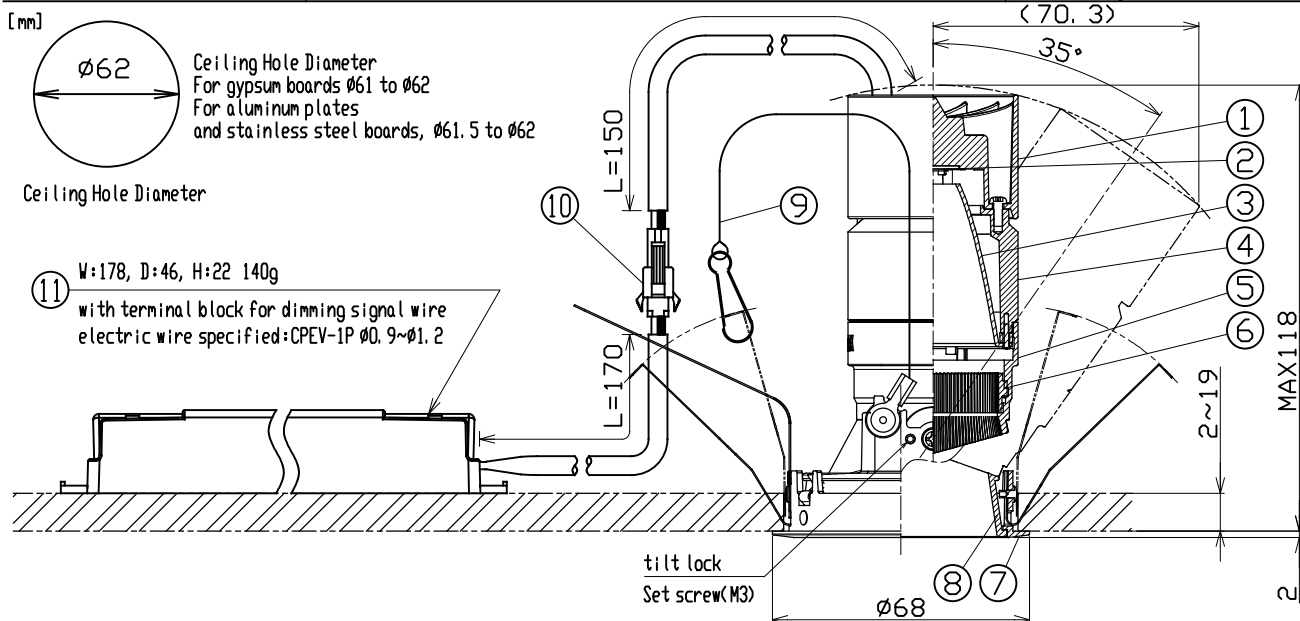


	PARTS	MATERIAL	REMARK
1	Socket Holder	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	Hood	ADC	Acrylic Baking Finish
6	Option Holder	ADC	Acrylic Baking Finish
7	Mounting Frame	ADC	Acrylic Baking Finish
8	Cone	ADC	WC, MC: Acrylic Baking Finish CC: Plating Finish
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	
11	Dedicated Driver		0-10V control dimming system

**ATTENTION**

- Do not cover fixtures with the heat insulator etc.
- Use the dedicated driver only.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.
- Danger! Do not remodel fixture.
- Use within 0~35°C ambient temperature range
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Use 0-10V control dimming system (SR-2830AS-1-10V (Sold separately)) only
- Calculate the capacity in accordance with JIS C8155 standard.
- Keep distance of the fixture and objects 0.2m or more.
- Please before attachment to the frame when performing the tilt lock
- Please do not unfasten the set screw for tilt lock too much. Otherwise, it may be dropped and lost.
- This fixture is ceiling installation only. It can not be mounted on an inclined ceiling or wall.

**CIRCUIT DIAGRAM**

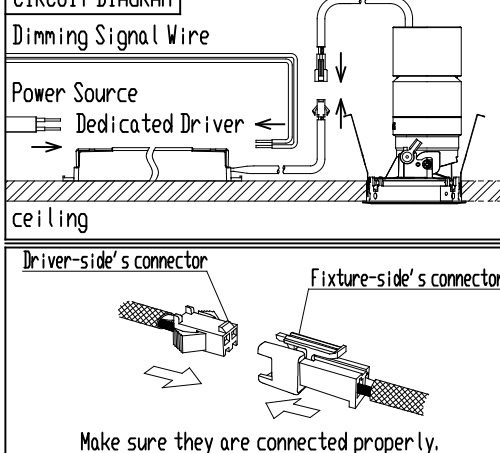

- The height of inside the ceiling have to be 140mm or more to install the driver there.
- Place the driver on the ceiling and attach the frame. (Please be sure to check the instruction manual)
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur. (Some foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)
- Tilt scales may cause manufacturing angular errors. Please use as a guide.