

**SPECIFICATION**

- Light Source LED Module (Mounted)
- Light Distribution N=Narrow, M=Medium
- Cone White Cone(WC)  
Matte black Cone(MC)  
Chrome Cone(CC)
- Dedicated Driver Constant current ( 50/60Hz shared)
- Fixture Input Voltage 32.6V
- Fixture Input Current 0.38A (MAX)
- Weight 160g
- Attached Safety Wire
- Tool for pan/tilt lock is equipped


**PRODUCT CODE**

- MMP-060A/NC/FLF/N·M/10A24/DL/3
- MMP-060A/NC/FLF/N·M/10A27/DL/3
- MMP-060A/NC/FLF/N·M/10A30/DL/3
- MMP-060A/NC/FLF/N·M/10A35/DL/3
- MMP-060A/NC/FLF/N·M/10A40/DL/3
- MMP-060A/NC/FLF/N·M/10A45/DL/3
- MMP-060A/NC/FLF/N·M/10A24/DL/3
- MMP-060A/NC/FLF/N·M/10A27/DL/3
- MMP-060A/NC/FLF/N·M/10A30/DL/3
- MMP-060A/NC/FLF/N·M/10A35/DL/3
- MMP-060A/NC/FLF/N·M/10A40/DL/3
- MMP-060A/CC/FLF/N·M/10A24/DL/3
- MMP-060A/CC/FLF/N·M/10A27/DL/3
- MMP-060A/CC/FLF/N·M/10A30/DL/3
- MMP-060A/CC/FLF/N·M/10A35/DL/3
- MMP-060A/CC/FLF/N·M/10A40/DL/3

**OPTION**

- Full Diffuser Lens Filter MLA-060/DF01
- Semi Diffuser Lens Filter MLA-060/DS01
- Full Spread Lens Filter MLA-060/SF01
- Semi Spread Lens Filter MLA-060/SS01
- Edge Control Lens Filter MLA-060/EC01
- Sharpener Lens (Narrow only) MLA-060/SH01

(mm)

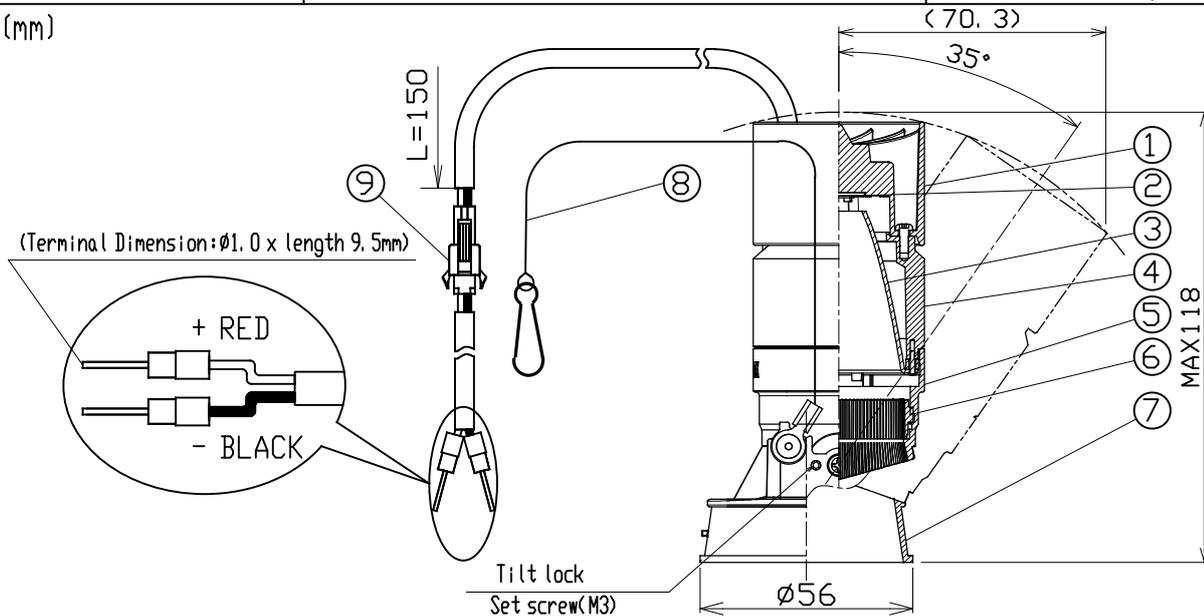

	PARTS	MATERIAL	REMARK
1	Socket Holder	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	Hood	ADC	Acrylic Baking Finish
6	Option Holder	ADC	Acrylic Baking Finish
7	Cone	ADC	Acrylic Baking Finish(WC·MC) Plating Finish(CC)
8	Safety Wire	Stainless Steel	
9	Safety Connector	Resin	

**ATTENTION**

- Do not cover fixtures with the heat insulator etc.
- Use the dedicated driver only.
- Connect input-side power wire to the dedicated driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Use phase control dimming system (SX-CD800 TRI(Sold separately)) only.
- Calculate the capacity in accordance with JIS C8155 standard.
- The height of inside the ceiling have to be 140mm or more to install the driver there.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please do not unfasten the set crew for pan/tilt lock too much. Otherwise, it may be dropped and lost.
- Please before attachment to the frame when performing the tilt lock.
- Keep distance of the fixtures and objects 0.2m or more.
- Place the driver on the ceiling and attach the frame. (Please be sure to check the instruction manual)
- Tilt scales may cause manufacturing angular errors. Please use as a guide.
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur.
- (Some Foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)

- Please use the 'class2' driver.  
In that case, grounding is not required.