


Discontinued product



SPECIFICATION

- Light Source LED Module (Mounted)
 - Light Distribution Narrow(N), Medium(M), Wide(W)
 - Body Matte black(M)
 - Vertical Aiming Angle MAX 100°
 - Horizontal Aiming Angle 360°
 - Dimming method 0-10V
 - Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
 - Input current 0.089A(Dedicated driver input voltage, 220V input)
0.087A(Dedicated driver input voltage, 240V input)
 - Power Consumption 16.8W(Included dedicated driver, 220V input)
17.0W(Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
 - Fixture Input voltage 19.5V
 - Fixture Input current 0.7A
 - Dimming signal input current 2mA
 - Weight 510g(Includes dedicated driver)


PRODUCT CODE

- SX-505LEC/Z102/N·M·W/R24B/M
- SX-505LEC/Z102/N·M·W/R27B/M
- SX-505LEC/Z102/N·M·W/R30B/M
- SX-505LEC/Z102/N·M·W/R35B/M
- SX-505LEC/Z102/N·M·W/R40B/M

OPTION

- Full Diffuser Lens Filter MLA-080/DF01
- Semi Diffuser Lens Filter MLA-080/DS03
- Full Spread Lens Filter MLA-080/SF01
- Semi Spread Lens Filter MLA-080/SS01
- Edge Control Lens Filter MLA-080/EC02

[mm]

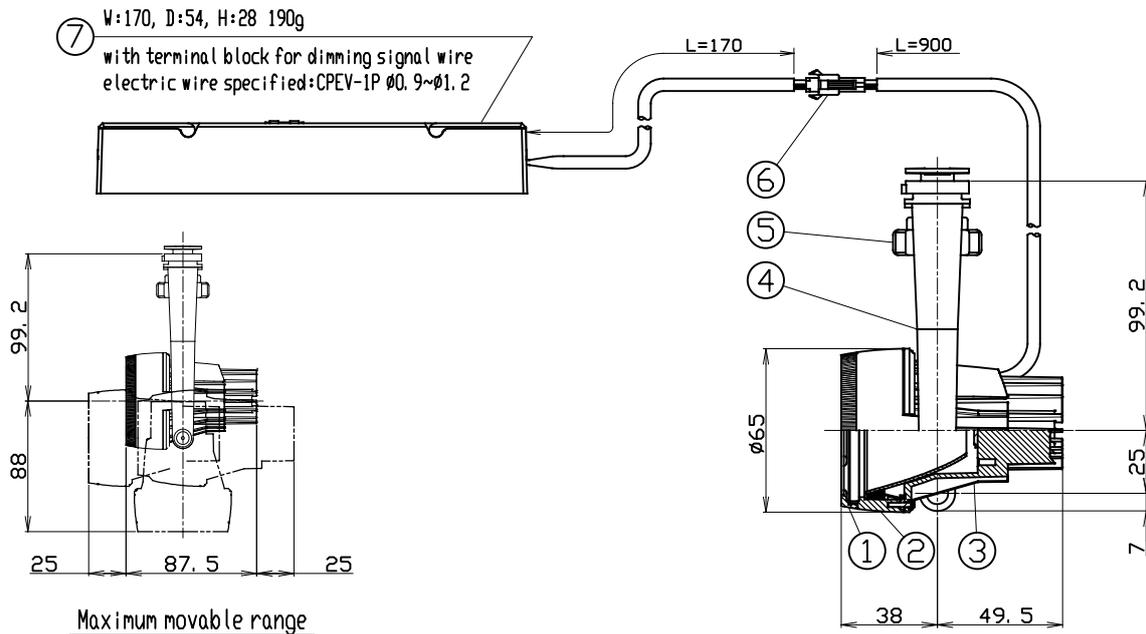

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Heat conductive body	ADC	Acrylic Baking Finish
4	Arm	Steel Plate	Acrylic Baking Finish
5	Grip Bolt	Resin	Black (M6)
6	Safety Connector	Resin	
7	Dedicated Driver		0-10V control dimming system

- ATTENTION**
- Use within 0°~35° ambient temperature range.
 - Because there are variations in the LEDs, emission color and brightness would be different even within the same model.
 - Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
 - Danger! Do not remodel the fixture.
 - To remove the hood, remove it with the hood facing down.
 - When mounting the fixture in a ceiling cavity etc. where heat is difficult to escape, be sure to open a vent in the upper part. (Open the vent evenly over the ceiling cavity surface to an opening ratio of 5% or more with respect to the area of the ceiling cavity.)
 - Please use constant current driver.
 - There is no sending terminal block on the dedicated driver (primary side).
 - Connect input-side power wire to the dedicated driver directly.
 - Check the corresponding linear box.
 - Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only.
 - When connecting to the electric circuit, calculate the capacity in accordance with JIS C8155 standard.
 - Keep distance of the fixture and objects 0.1m or more.

