


**Discontinued product**



**SPECIFICATION**

- Light Source LED Module (Mounted)
  - Light Distribution Narrow(N), Medium(M), Wide(W)
  - Body Matte black(M)
  - Vertical Aiming Angle MAX 100°
  - Horizontal Aiming Angle 360°
  - Dimming method 0-10V
  - Input Voltage 220V±6%, 240V±6% (Dedicated driver input voltage)
  - Input current 0.089A (Dedicated driver input voltage, 220V input)  
0.087A (Dedicated driver input voltage, 240V input)
  - Power Consumption 16.8W (Included dedicated driver, 220V input)  
17.0W (Included dedicated driver, 240V input)
- \*The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current ( 50/60Hz shared)
  - Fixture Input voltage 19.5V
  - Fixture Input current 0.7A
  - Dimming signal input current 2mA
  - Weight 520g (Includes dedicated driver)


**PRODUCT CODE**

SX-535LEC/Z102/N·M·W/R24B/M  
SX-535LEC/Z102/N·M·W/R27B/M  
SX-535LEC/Z102/N·M·W/R30B/M  
SX-535LEC/Z102/N·M·W/R35B/M  
SX-535LEC/Z102/N·M·W/R40B/M

**OPTION**

Full Diffuser Lens Filter MLA-080/DF01  
Semi Diffuser Lens Filter MLA-080/DS03  
Full Spread Lens Filter MLA-080/SF01  
Semi Spread Lens Filter MLA-080/SS01  
Edge Control Lens Filter MLA-080/EC02

[mm]

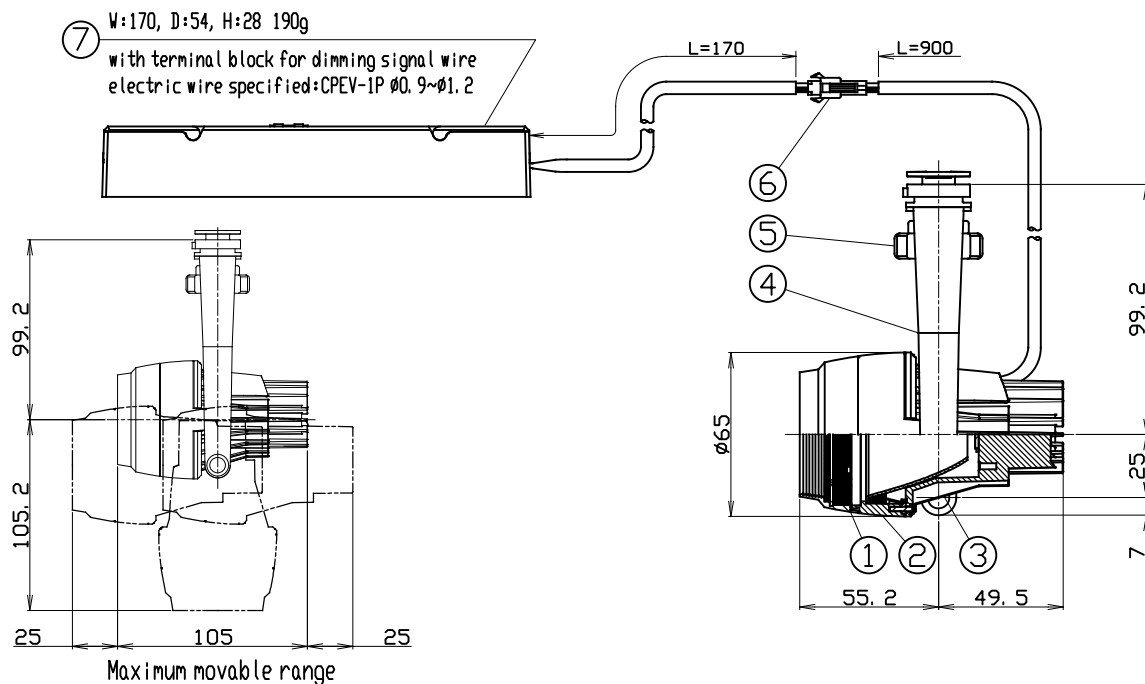

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Heat conductive body	ADC	Acrylic Baking Finish
4	Arm	Steel Plate	Acrylic Baking Finish
5	Grip Bolt	Resin	Black (M6)
6	Safety Connector	Resin	
7	Dedicated Driver		0-10V control dimming system

**ATTENTION**

- Use within 0℃~35℃ ambient temperature range.
- Because there are variations in the LEDs, emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Danger! Do not remodel the fixture.
- To remove the hood, remove it with the hood facing down.
- When mounting the fixture in a ceiling cavity etc. where heat is difficult to escape, be sure to open a vent in the upper part. (Open the vent evenly over the ceiling cavity surface to an opening ratio of 5% or more with respect to the area of the ceiling cavity.)
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.
- Check the corresponding linear box.
- Use 0-10V control dimming system (SR-2830AS-1-10V (Sold separately)) only.
- When connecting to the electric circuit, calculate the capacity in accordance with JIS C8155 standard.
- Keep distance of the fixture and objects 0.1m or more.

**CIRCUIT DIAGRAM**

