

**SPECIFICATION**

- Light Source LED Module (Mounted)
- Light Distribution Narrow(N), Medium(M)
- Body White(W), Matte black(M), Silver(S)
- Corn White Corn(WC)
- Corn Matte black Corn(MC)
- Vertical aiming angle Upper10°, Lower90°
- Horizontal aiming angle 345°
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 32.6V
- Fixture Input current 0.38A(MAX)
- Weight 195g
- Safety Wire is attached
- tool for pan/tilt lock is equipped


**PRODUCT CODE**

MMP-060D/3H/WCL/N·M/10A24/DL/3  
MMP-060D/3H/WCL/N·M/10A27/DL/3  
MMP-060D/3H/WCL/N·M/10A30/DL/3  
MMP-060D/3H/WCL/N·M/10A35/DL/3  
MMP-060D/3H/WCL/N·M/10A40/DL/3  
MMP-060D/3H/MCL/N·M/10A24/DL/3  
MMP-060D/3H/MCL/N·M/10A27/DL/3  
MMP-060D/3H/MCL/N·M/10A30/DL/3  
MMP-060D/3H/MCL/N·M/10A35/DL/3  
MMP-060D/3H/MCL/N·M/10A40/DL/3  
MMP-060D/3H/SWL·SML/N·M/10A24/DL/3  
MMP-060D/3H/SWL·SML/N·M/10A27/DL/3  
MMP-060D/3H/SWL·SML/N·M/10A30/DL/3  
MMP-060D/3H/SWL·SML/N·M/10A35/DL/3  
MMP-060D/3H/SWL·SML/N·M/10A40/DL/3


**OPTION**

Full Diffuser Lens Filter MLA-060/DF01  
Semi Diffuser Lens Filter MLA-060/DS01  
Full Spread Lens Filter MLA-060/SF01  
Semi Spread Lens Filter MLA-060/SS01  
Edge Control Lens Filter MLA-060/EC01  
Sharpen Lens MLA-060/SH01  
(available only for narrow distribution)

[mm]

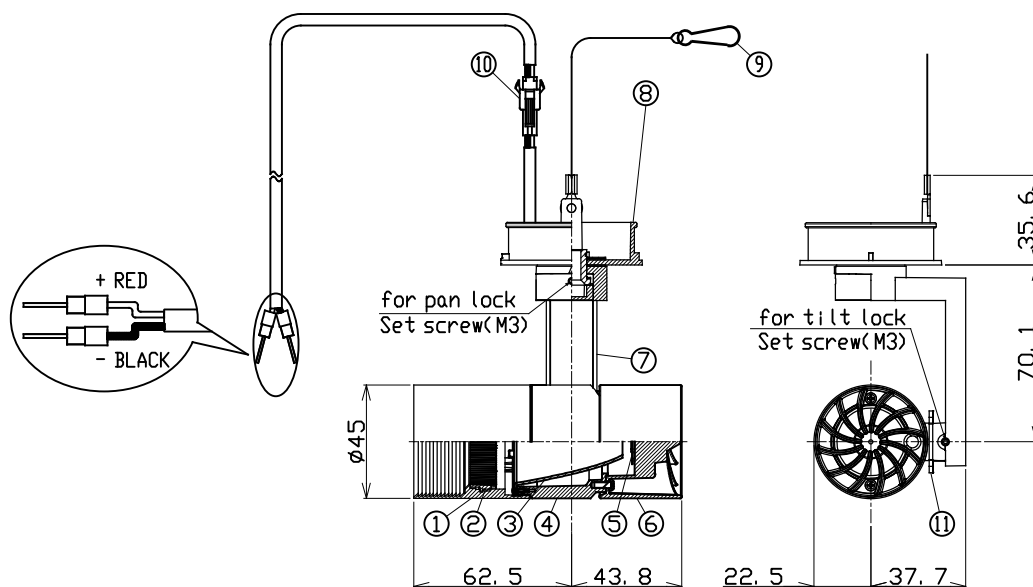

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Option Holder	ADC	Acrylic Baking Finish
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	LED Module		
6	Socket Holder	ADC	Acrylic Baking Finish
7	Arm	ADC	Acrylic Baking Finish
8	Cone	ADC	Acrylic Baking Finish
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	
11	Tilt Protractor	Resin	

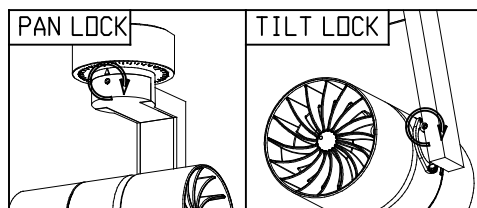

- ATTENTION**
- Emission color and brightness would be different even within the same model.
  - Do not use a radio or TV near the lighting fixtures. The unit may generate noise in the radio or TV.
  - Danger! Do not remodel fixtures.
  - Do not cover the lighting fixture with insulation etc.
  - Be sure to connect the included safety wire to the lighting fixture and frame.
  - Keep distance of the fixtures and objects 0.1m or more.
  - Use within 0°C~35°C ambient temperature range
  - Please do not move the fixture body under the situation the pan/tilt lock works.
  - Please do not unfasten the set screw for pan/tilt lock too much. Otherwise, it may be dropped and lost.
  - Install this lighting fixtures only on the ceiling. It can not be mounted on inclined ceilings or walls.
  - Please do not irradiate the lighting fixtures upward. Dust accumulates in the light emitting part, which may cause fire.