

SPECIFICATION

- Light Source LED Module (Mounted)
- Body White(W), Matte black(M), Silver(S)
- Light Distribution N=Narrow, M=Medium
- Vertical aiming angle Upper10°, Lower90°
- Horizontal aiming angle 380°
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 32. 6V
- Fixture Input current 0. 38A(MAX)
- Weight 250g
- tool for pan/tilt lock is equipped


PRODUCT CODE

MMP-060S/5H/W·M·S/MC/N·M/10A24/DL/3
 MMP-060S/5H/W·M·S/MC/N·M/10A27/DL/3
 MMP-060S/5H/W·M·S/MC/N·M/10A30/DL/3
 MMP-060S/5H/W·M·S/MC/N·M/10A35/DL/3
 MMP-060S/5H/W·M·S/MC/N·M/10A40/DL/3


OPTION

Full Diffuser Lens Filter MLA-060/DF01
 Semi Diffuser Lens Filter MLA-060/DS01
 Full Spread Lens Filter MLA-060/SF01
 Semi Spread Lens Filter MLA-060/SS01
 Edge Control Lens Filters MLA-060/EC01
 Sharpener Lens (Narrow only) MLA-060/SH01

[mm]

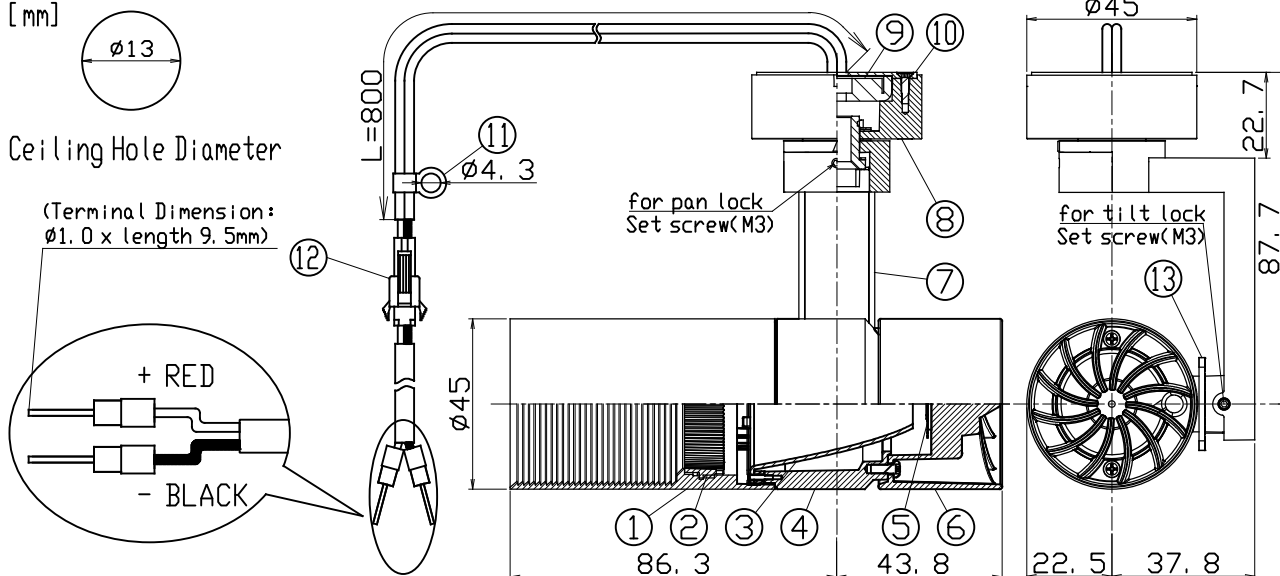

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Option Holder	ADC	Acrylic Baking Finish
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	LED Module		
6	Socket Holder	ADC	Acrylic Baking Finish
7	Arm	ADC	Acrylic Baking Finish
8	Magnet Case	ADC	Acrylic Baking Finish
9	Magnet		
10	Magnet cover	Resin	
11	Safety clip	Brass	
12	Safety connector	Resin	
13	Tilt Protractor	Resin	

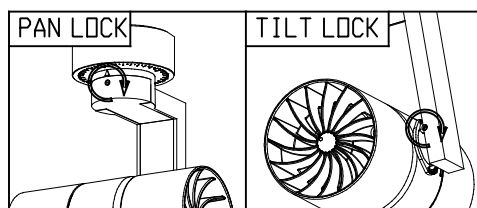

ATTENTION

- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Danger! Do not remodel fixtures.
- Please do not irradiate the lamp upward. Dust accumulates in the light emitting part, which may cause fire.
- Keep distance of the fixtures and objects 0. 1m or more.
- Use within 0t~35t ambient temperature range
- Please do not move the fixture body under the situation the pan/tilt lock works.
- Please do not unfasten the set screw for pan/tilt lock too much. Otherwise, it may be dropped and lost.
- In order to prevent the falling, please install the safety clip attached to the instrument side cable with a screw (M4), in a firm place.
- Please be sure to install the instrument on an iron plate without irregularities.
- After installing the instrument, please ensure that sufficient holding power is secured and not falling.
- Do not put the instrument close to electronic medical equipment such as pacemaker.
- Do not bring the equipment closer to the magnetic storage medium (Floppy disk, magnetic card, etc.).
- Do not place instruments close to various kinds of electronic equipment, video equipment, communication equipment (mobile phone, clock, etc.)
- Since there is a risk of the magnet being damaged, please do not give impact to the equipment.
- Please do not use under hot and humid environment.
- Please use the "class2" driver.
- In that case, grounding is not required.