

SPECIFICATION


- Light Source LED Module (Mounted)
- Light Distribution N=Narrow, M=Medium
- Light Distribution White Cone(WC)
Matte black Cone(MC)
Chrome Cone(CC)
- Frame White, Matte black
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 32, 6V
- Fixture Input Current 0. 38A
- Weight 180g
- Attached Safety Wire
- tool for pan/tilt lock is equipped

PRODUCT CODE

MMP-060A/WC/SWF/N・M/10A24/DL/3
MMP-060A/WC/SWF/N・M/10A27/DL/3
MMP-060A/WC/SWF/N・M/10A30/DL/3
MMP-060A/WC/SWF/N・M/10A35/DL/3
MMP-060A/WC/SWF/N・M/10A40/DL/3
MMP-060A/MC/SWF・SMF/N・M/10A24/DL/3
MMP-060A/MC/SWF・SMF/N・M/10A27/DL/3
MMP-060A/MC/SWF・SMF/N・M/10A30/DL/3
MMP-060A/MC/SWF・SMF/N・M/10A35/DL/3
MMP-060A/MC/SWF・SMF/N・M/10A40/DL/3
MMP-060A/CC/SWF・SMF/N・M/10A24/DL/3
MMP-060A/CC/SWF・SMF/N・M/10A27/DL/3
MMP-060A/CC/SWF・SMF/N・M/10A30/DL/3
MMP-060A/CC/SWF・SMF/N・M/10A35/DL/3
MMP-060A/CC/SWF・SMF/N・M/10A40/DL/3

OPTION

Full Diffuser Lens Filter MLA-060/DF01
Semi Diffuser Lens Filter MLA-060/DS01
Full Spread Lens Filter MLA-060/SF01
Semi Spread Lens Filter MLA-060/SS01
Edge Control Lens Filters MLA-060/EC01
Sharpening Lens MLA-060/SH01
(available only for narrow distribution)

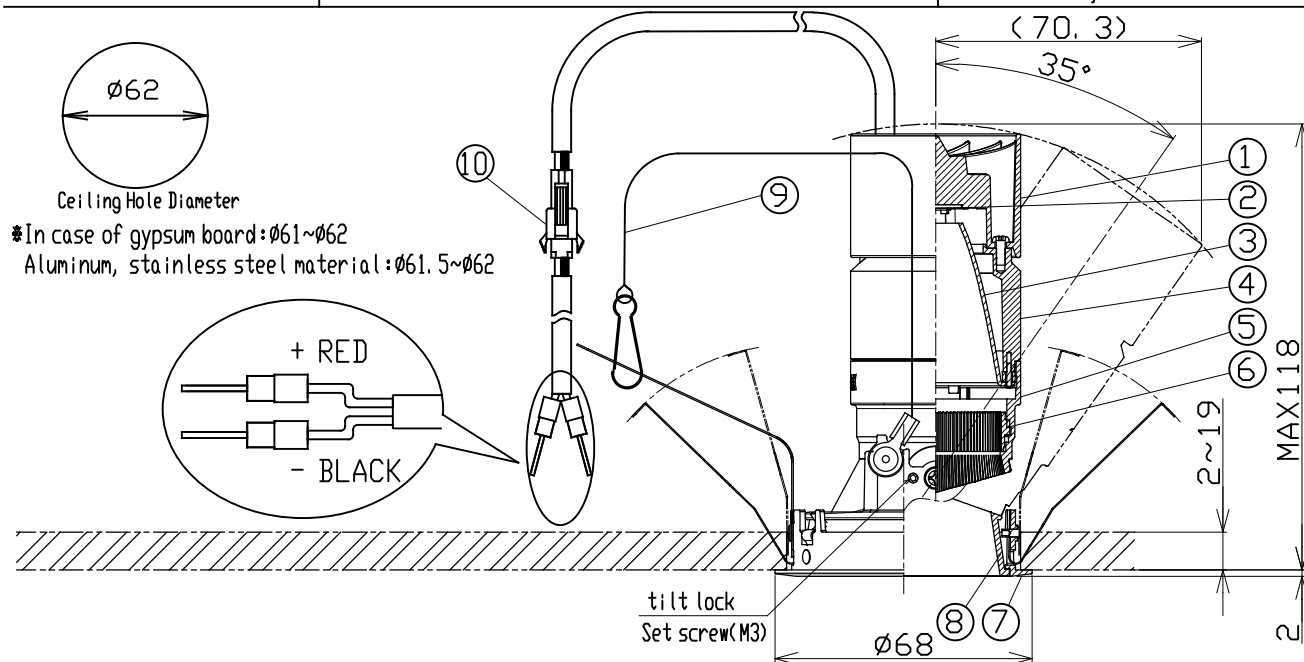

	PARTS	MATERIAL	REMARK
1	Socket Holder	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	Hood	ADC	Acrylic Baking Finish
6	Option Holder	ADC	Acrylic Baking Finish
7	Unit Mounting Spring	ADC	Acrylic Baking Finish
8	Cone	ADC	Acrylic Baking Finish(WC・MC) Plating Finish(CC)
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Use the dedicated driver only.
- Connect input-side power wire to the dedicated driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Use phase control dimming system (SX-CD800 TRI(Sold separately)) only.
- Calculate the capacity in accordance with JIS C8155 standard.
- The height of inside the ceiling have to be 140mm or more to install the driver there.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please do not unfasten the set crew for panm/tilt lock too much. Otherwise, it may be dropped and lost.
- Please before attachment to the frame when performing the tilt lock
- Keep distance of the fixtures and objects 0. 2m or more.
- Place the driver on the ceiling and attach the frame. (Please be sure to check the instruction manual.)
- Tilt scales may cause manufacturing angular errors. Please use as a guide.
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur.
(Some foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)