

SPECIFICATION

- Light Source LED Module (Mounted)
- Light Distribution Narrow(N), Medium(M)
- Cone White Cone(WC), Matte black Cone(MC)
Chrome Cone(CC)
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
- Input current 0.079A(Dedicated driver input voltage, 220V input)
0.076A(Dedicated driver input voltage, 240V input)
- Power Consumption 15.3W(Included dedicated driver, 220V input)
15.5W(Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 32.6V
- Fixture Input current 0.38A
- Dimming signal input current 2mA
- Weight 300g(Includes dedicated driver)
- Safety Wire is attached
- tool for tilt lock is equipped


PRODUCT CODE

- MMP-060A/VC/FLF/N·M/10A24/Z2/3
- MMP-060A/VC/FLF/N·M/10A27/Z2/3
- MMP-060A/VC/FLF/N·M/10A30/Z2/3
- MMP-060A/VC/FLF/N·M/10A35/Z2/3
- MMP-060A/VC/FLF/N·M/10A40/Z2/3
- MMP-060A/MC/FLF/N·M/10A24/Z2/3
- MMP-060A/MC/FLF/N·M/10A27/Z2/3
- MMP-060A/MC/FLF/N·M/10A30/Z2/3
- MMP-060A/MC/FLF/N·M/10A35/Z2/3
- MMP-060A/MC/FLF/N·M/10A40/Z2/3
- MMP-060A/CC/FLF/N·M/10A24/Z2/3
- MMP-060A/CC/FLF/N·M/10A27/Z2/3
- MMP-060A/CC/FLF/N·M/10A30/Z2/3
- MMP-060A/CC/FLF/N·M/10A35/Z2/3
- MMP-060A/CC/FLF/N·M/10A40/Z2/3

OPTION


- Full Diffuser Lens Filter MLA-060/DF01
- Semi Diffuser Lens Filter MLA-060/DS01
- Full Spread Lens Filter MLA-060/SF01
- Semi Spread Lens Filter MLA-060/SS01
- Edge Control Lens Filter MLA-060/EC01
- Sharpener Lens MLA-060/SH01
(available only for narrow distribution)

[mm]

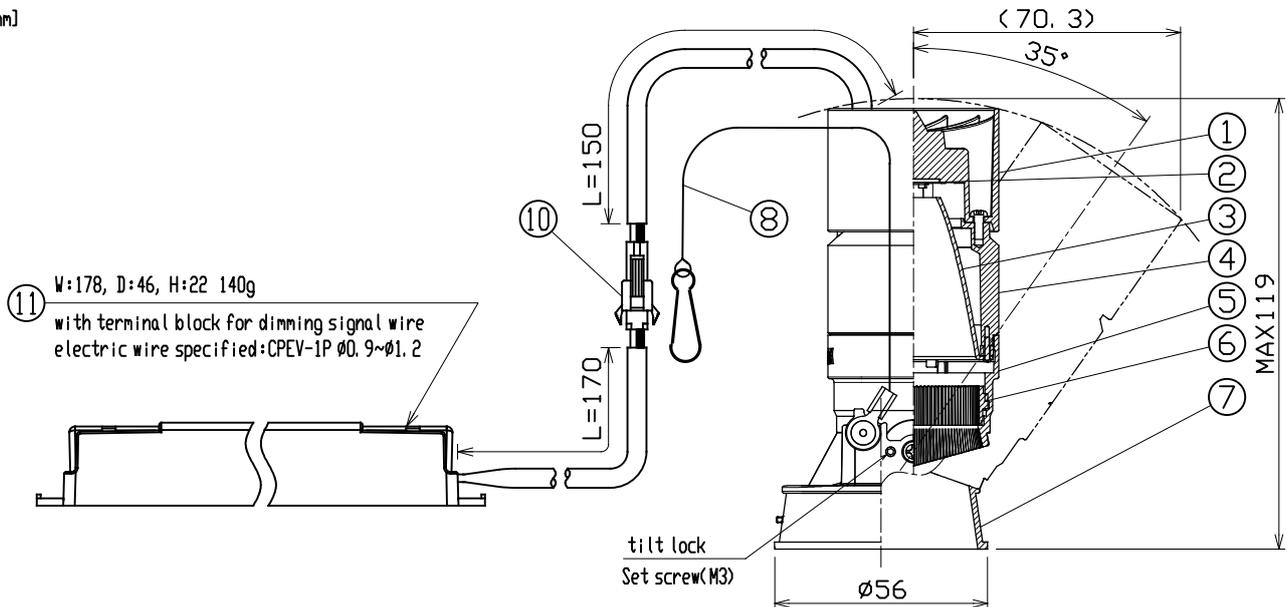

	PARTS	MATERIAL	REMARK
1	Socket Holder	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	Hood	ADC	Acrylic Baking Finish
6	Option Holder	ADC	Acrylic Baking Finish
7	Cone	ADC	WC,MC:Acrylic Baking Finish CC:Plating Finish
8	Safety Wire	Stainless Steel	
9	Safety Connector	Resin	
10	Dedicated Driver		0-10V control dimming system

CIRCUIT DIAGRAM

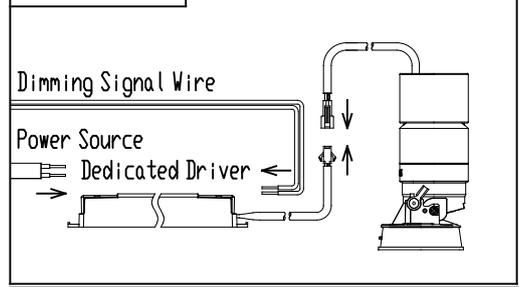

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Use the dedicated driver only.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.
- Danger! Do not remodel fixture.
- Use within 0~35°C ambient temperature range
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only
- Calculate the capacity in accordance with JIS C8155 standard.
- Keep distance of the fixture and objects 0.2m or more.
- Please before attachment to the frame when performing the tilt lock.
- Please do not unfasten the set crew for tilt lock too much. Otherwise, it may be dropped and lost.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Place the driver on the ceiling and attach the frame. (Please be sure to check the instruction manual.)
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur. (Some foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)
- Tilt scales may cause manufacturing angular errors. Please use as a guide.

