


SPECIFICATION


- Light Source LED Module (Mounted) #Ra93 typ
- Body White(WC) Matte black(MC) Silver(SC)
- Frame White Cone(W) Matte black Cone(M)
- Cone White Cone(FW) Matte black Cone(FM) Chrome Cone(FC)
- Light Distribution M=Medium
- Vertical aiming angle 100°
- Horizontal aiming angle 360°
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 36.8V
- Fixture Input Current 0.7A (MAX)
- Weight 650g
- Attached Safety Wire
- tool for tilt lock is equipped

PRODUCT CODE

MMP-080D/FW/WCW/M/20B27/DL/3
 MMP-080D/FW/WCW/M/20B30/DL/3
 MMP-080D/FW/WCW/M/20B35/DL/3
 MMP-080D/FW/WCW/M/20B40/DL/3
 MMP-080D/FM/MCM/M/20B27/DL/3
 MMP-080D/FM/MCM/M/20B30/DL/3
 MMP-080D/FM/MCM/M/20B35/DL/3
 MMP-080D/FM/MCM/M/20B40/DL/3
 MMP-080D/FC/SCW・SCM/M/20B27/DL/3
 MMP-080D/FC/SCW・SCM/M/20B30/DL/3
 MMP-080D/FC/SCW・SCM/M/20B35/DL/3
 MMP-080D/FC/SCW・SCM/M/20B40/DL/3

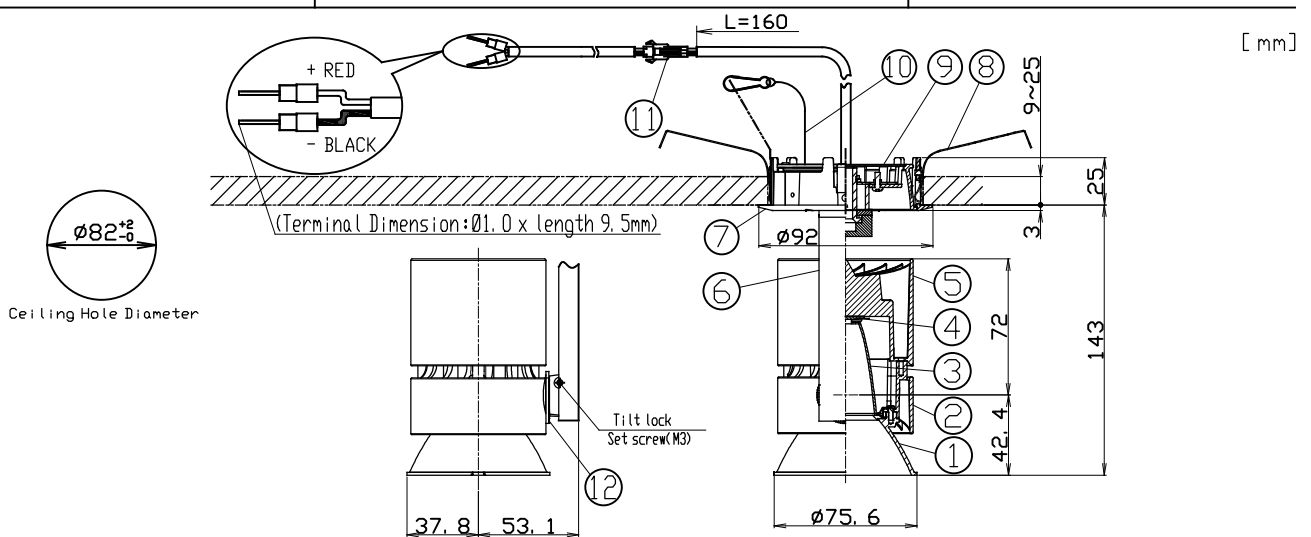

	PARTS	MATERIAL	REMARK
1	Cone	ADC	Acrylic Baking Finish(FW・FM) Plating Finish(FC)
2	Body	ADC	Acrylic Baking Finish
3	Reflector	Aluminum	
4	LED Module		
5	Socket Holder	ADC	Acrylic Baking Finish
6	Arm	ADC	Acrylic Baking Finish
7	Mounting Frame	ADC	Acrylic Baking Finish
8	Unit Mounting Spring	Stainless Steel	
9	Cone	ADC	Acrylic Baking Finish
10	Safety Wire	Stainless Steel	
11	Safety Connector	Resin	
12	Tilt Protractor	Resin	



ATTENTION

- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Danger ! Do not remodel fixtures.
- Please use the constant current driver.
- Connect input-side power wire to the dedicated driver directly.
- Please do not remove safety connector
- Do not cover fixtures with the heat insulator etc.
- Connect a safety wire to the fixture and mounting frame directly.
- Please refer to the Installation Guide about the conditions for the installation of the lighting fixtures.
- Please use the "class2" driver. In that case, grounding is not required.
- Keep distance of the fixtures and objects 0.2m or more.
- Use within 0℃~35℃ ambient temperature range
- Please do not move the fixture body under the situation the tilt lock works.
- Please do not unfasten the set crew for tilt lock too much. Otherwise, it may be dropped and lost.