

SPECIFICATION

- Light Source LED Module (Mounted)
- Cone White(W), Matte black(M), Silver(S)
- Light Distribution Narrow(N), Medium(M)
- Vertical aiming angle Upper10°, Lower90°
- Horizontal aiming angle 380°
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
- Input current 0.200A(Dedicated driver input voltage, 220V input)
0.185A(Dedicated driver input voltage, 240V input)
- Power Consumption 39.7W(Included dedicated driver, 220V input)
39.9W(Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 37.9V
- Fixture Input current 0.9A
- Dimming signal input current 2mA
- Weight 870g(Includes dedicated driver)
- Safety Wire is attached


PRODUCT CODE

MMP-100S/1H/W·M·S/MS/N·M/30B27/Z2/3
MMP-100S/1H/W·M·S/MS/N·M/30B30/Z2/3
MMP-100S/1H/V·M·S/MS/N·M/30B35/Z2/3
MMP-100S/1H/W·M·S/MS/N·M/30B40/Z2/3

OPTION

Full Diffuser Lens Filter MLA-100/DF01
Semi Diffuser Lens Filter MLA-100/DS02
Full Spread Lens Filter MLA-100/SF01
Semi Spread Lens Filter MLA-100/SS01
Edge Control Lens Filters MLA-100/EC02
Sharpener Lens MLA-100/SH01
(available only for narrow distribution)

[mm]

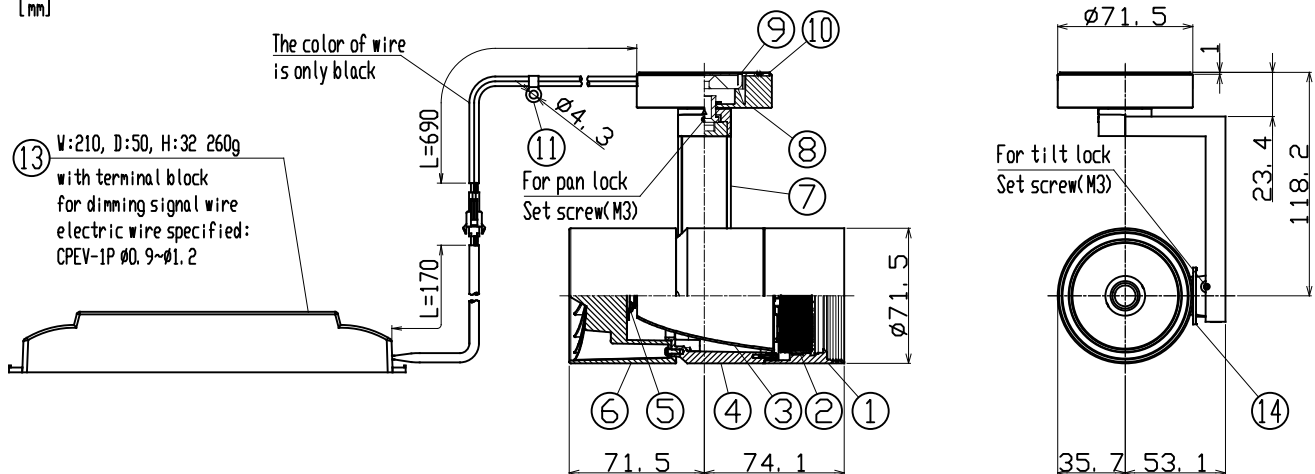


	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Option Holder	ADC	Acrylic Baking Finish
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	LED Module		
6	Socket Holder	ADC	Acrylic Baking Finish
7	Arm	ADC	Acrylic Baking Finish
8	Magnet Case	ADC	Acrylic Baking Finish
9	Magnet		
10	Magnet cover	Resin	with Nonslip Sheet
11	Safety clip	Brass	
12	Safety connector	Resin	
13	Dedicated Driver		0-10V control dimming system
14	Tilt Protractor	Resin	

ATTENTION

- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Danger! Do not remodel the fixture.
- Please do not irradiate the lamp upward.
- Dust accumulates in the light emitting part, which may cause fire.
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the approved driver directly.
- Calculate the capacity in accordance with JIS C8155 standard.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only
- Keep distance of the fixture and objects 0.3m or more.
- Use within 0°C~35°C ambient temperature range
- Prevent anybody except installers or coordinators from getting in arm's reach or arrange the enclosure not to be touched because of the danger of burn.
- Please do not move the fixture body under the situation the pan/tilt lock works.
- Please do not unfasten the set screw for pan/tilt lock too much.
- Otherwise, it may be dropped and lost.
- Please install the attachment plate in the substrate area with the screw(M4).
- In order to prevent the falling, please install the safety clip attached to the instrument side cable with a screw (M4), in a firm place within 300mm from the appliance.

CIRCUIT DIAGRAM

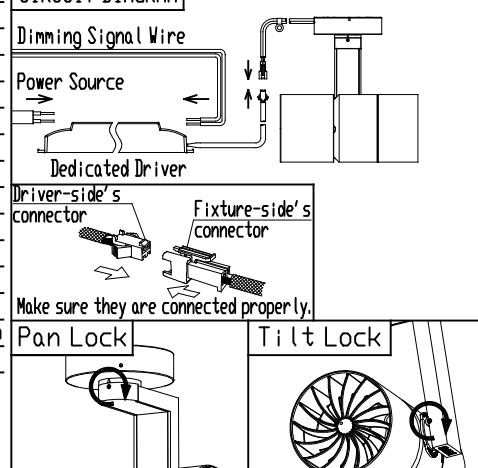

- Please be sure to install the fixture on an iron plate without irregularities.
- After installing the fixture, please ensure that sufficient holding power is secured and not falling.
- Do not put the fixture close to electronic medical equipment such as pacemaker.
- Do not bring the fixture closer to the magnetic storage medium. (Floppy disk, magnetic card, etc.)
- Do not place the fixture close to various kinds of electronic equipment, video equipment, communication equipment (mobile phone, clock, etc.).
- Since there is a risk of the magnet being damaged, please do not make impact to the fixture.
- Please do not use under hot and humid environment.