


SPECIFICATION

- Light Source LED Module (Mounted)
- Light Distribution F= Flood
- Cone White Cone(WC), Matt Black Cone(MC), Chrome Cone(CC)
- Frame Color White (SWF), Matt Black (SMF)
- Dedicated driver Constant current (50/60Hz shared)
- Fixture Input Voltage 54, 2V
- Fixture Input Current 1. 2A (MAX)
- Weight 1. 4Kg
- Attached Safety Wire

PRODUCT CODE



- MMP-130F/WC/SWF/F/60B27/DL/3
 MMP-130F/WC/SWF/F/60B30/DL/3
 MMP-130F/WC/SWF/F/60B35/DL/3
 MMP-130F/WC/SWF/F/60B40/DL/3
 MMP-130F/MC/SWF・SMF/F/60B27/DL/3
 MMP-130F/MC/SWF・SMF/F/60B30/DL/3
 MMP-130F/MC/SWF・SMF/F/60B35/DL/3
 MMP-130F/MC/SWF・SMF/F/60B40/DL/3
 MMP-130F/CC/SWF・SMF/F/60B27/DL/3
 MMP-130F/CC/SWF・SMF/F/60B30/DL/3
 MMP-130F/CC/SWF・SMF/F/60B35/DL/3
 MMP-130F/CC/SWF・SMF/F/60B40/DL/3

(mm)



Ceiling Hole Diameter

(Terminal Dimension: Ø1.0 x length 9.5mm)

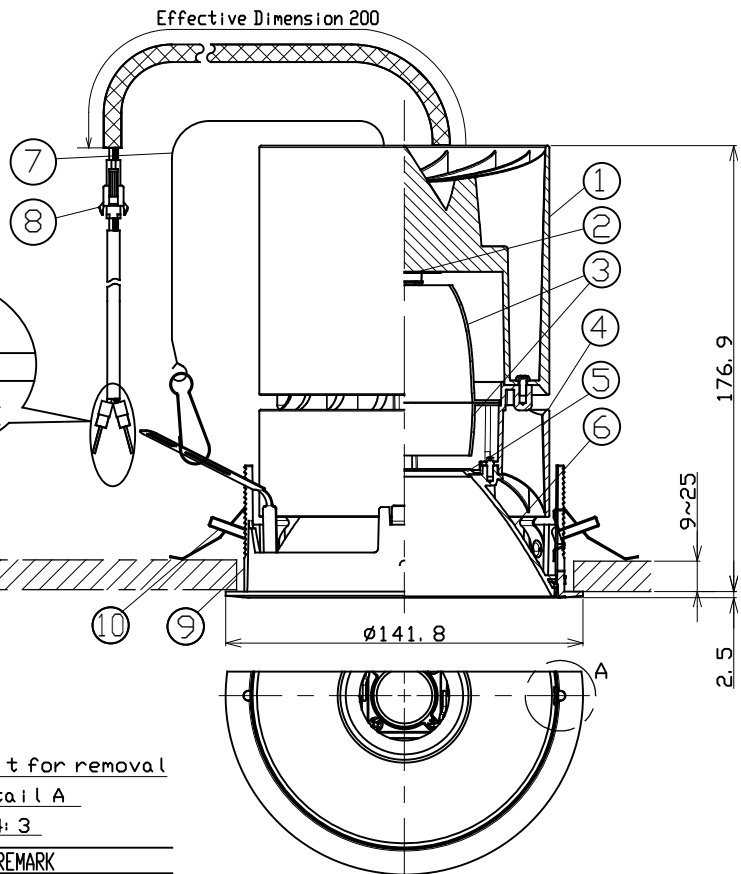

	PARTS	MATERIAL	REMARK
1	Socket Holder	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	Glare Cut Ring	ADC	
6	Cone	ADC	WC, MC: Acrylic Baking Finish CC: Plating Finish
7	Safety Wire	Stainless Steel	
8	Safety Connector	Resin	
9	Mounting Frame	ADC	Acrylic Baking Finish
10	Unit Mounting Spring	Stainless Steel	

ATTENTION

- Use within 0℃~35℃ ambient temperature range
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0.3m or more.
- Danger! Do not remodel fixtures.
- Do not use a radio or TV near the fixtures.
The unit may generate noise in the radio or TV.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Use the constant current driver only.
- Connect input-side power wire to the Approved driver directly.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment.
- It can not be mounted on an inclined ceiling or wall.
- Please use the "class2" driver. In that case, grounding is not required.