

SERIES

**ModuleX®80**


FUNCTION

Adjustable downlight

CAT, No.

MSP-080A/FLF/M/10B/DL/3

**Discontinued product**




**SPECIFICATION**

- Light Source LED Module (Mounted)
- Light Distribution M=Medium
- Cone Color White Cone(WC)  
Matte Black Cone(MC)  
Chrome Cone(CC)
- Approved Driver Constant current (Sold Separately)
- Fixture Input Voltage 18.6V
- Fixture Input Current 0.48A (0.5A MAX)
- Weight 320g
- Attached Safety Wire

**PRODUCT CODE**

MSP-080A/WC/FLF/M/10B27/DL/3  
MSP-080A/WC/FLF/M/10B30/DL/3  
MSP-080A/WC/FLF/M/10B35/DL/3  
MSP-080A/WC/FLF/M/10B40/DL/3  
MSP-080A/MC/FLF/M/10B27/DL/3  
MSP-080A/MC/FLF/M/10B30/DL/3  
MSP-080A/MC/FLF/M/10B35/DL/3  
MSP-080A/MC/FLF/M/10B40/DL/3  
MSP-080A/CC/FLF/M/10B27/DL/3  
MSP-080A/CC/FLF/M/10B30/DL/3  
MSP-080A/CC/FLF/M/10B35/DL/3  
MSP-080A/CC/FLF/M/10B40/DL/3

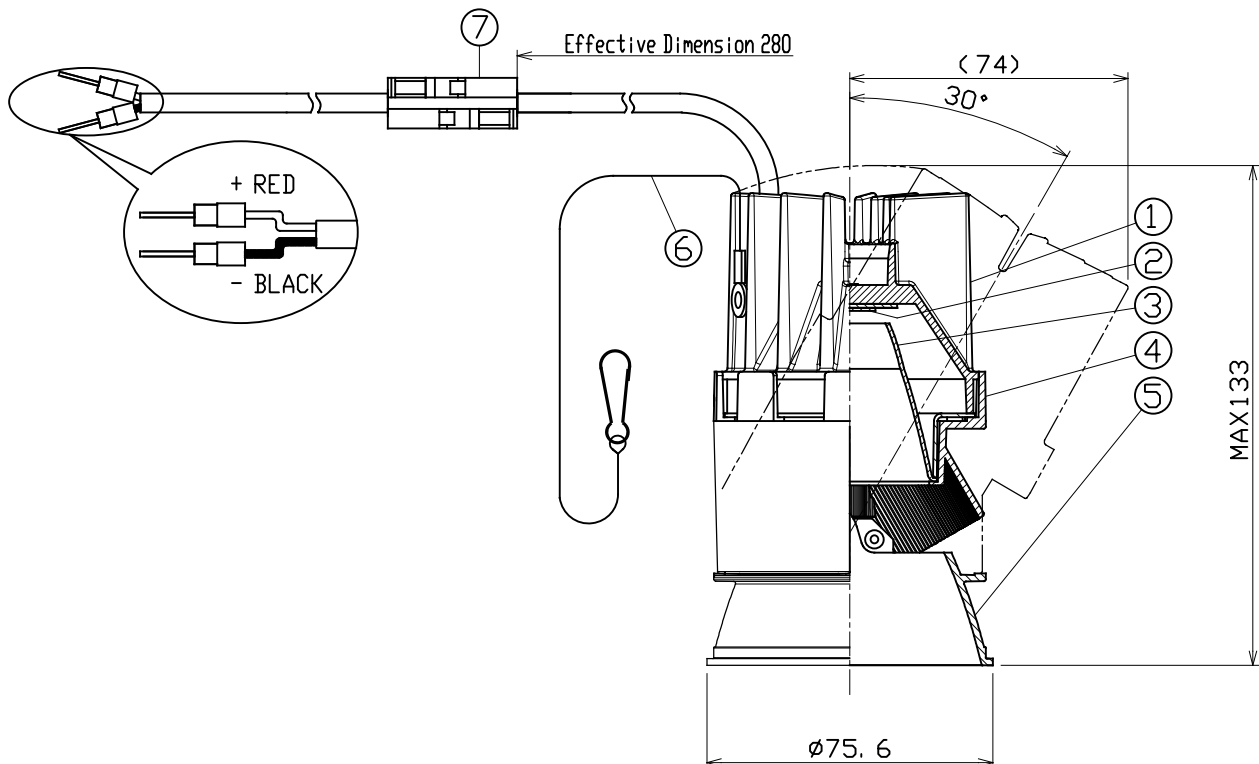

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Hood	ADC	Acrylic Baking Finish
5	Cone	ADC	Acrylic Baking Finish(WC・MC) Plating Finish(CC)
6	Safety Wire	Stainless Steel	
7	Safety Connector	Resin	

**ATTENTION**

- Use within 0℃~35℃ ambient temperature range
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0.2m or more.
- Danger! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the Approved driver directly.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.  
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.

**ModuleX®**

ModuleX Inc.

SPECIFICATION SHEET

SCALE

1/2

CREATED DATE

17/APR/2017

REVISION DATE