

**SPECIFICATION**

- Light Source LED Module (Mounted)
- Body White(W), Matte black(M), Silver(S)
- Light Distribution Narrow(N), Medium(M)
- Vertical aiming angle Upper 10°, Lower 90°
- Horizontal aiming angle 380°
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 36.9V
- Fixture Input current 0.48A (0.5A MAX)
- Weight 550g
- tool for pan/tilt lock is equipped


**PRODUCT CODE**

MMP-80S/1H/W·M·S/MS/N·M/10B27/DL/3  
 MMP-80S/1H/W·M·S/MS/N·M/10B30/DL/3  
 MMP-80S/1H/W·M·S/MS/N·M/10B35/DL/3  
 MMP-80S/1H/W·M·S/MS/N·M/10B40/DL/3


**OPTION**

Full Diffuser Lens Filter MLA-80/DF01  
 Semi Diffuser Lens Filter MLA-80/DS03  
 Full Spread Lens Filter MLA-80/SF01  
 Semi Spread Lens Filter MLA-80/SS01  
 Edge Control Lens Filters MLA-80/EC02  
 Sharpener Lens MLA-80/SH01  
 (available only for narrow distribution)

[mm]

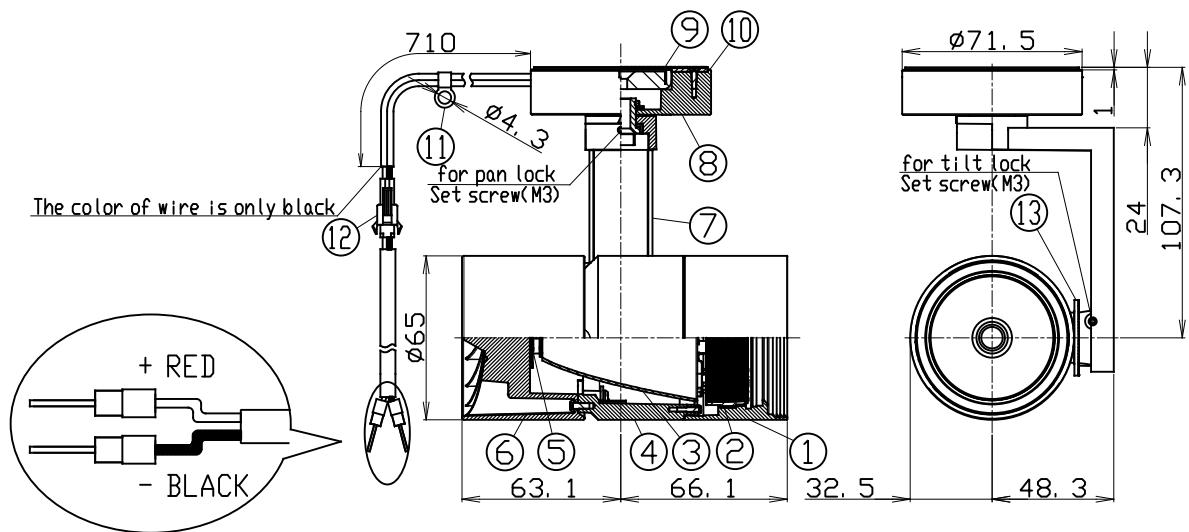

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Option Holder	ADC	Acrylic Baking Finish
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	LED Module		
6	Socket Holder	ADC	Acrylic Baking Finish
7	Arm	ADC	Acrylic Baking Finish
8	Magnet Case	ADC	Acrylic Baking Finish
9	Magnet		
10	Magnet cover	Resin	with Nonslip Sheet
11	Safety clip	Brass	
12	Safety connector	Resin	
13	Tilt Protractor	Resin	

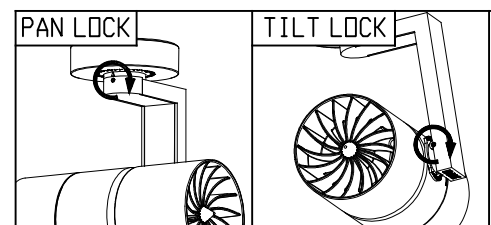

**ATTENTION**

- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Danger! Do not remodel the fixture.
- Please do not irradiate the lamp upward. Dust accumulates in the light emitting part, which may cause fire.
- Keep distance of the fixture and objects 0.2m or more.
- Use within 0℃~35℃ ambient temperature range
- Prevent anybody except installers or coordinators from getting in arm's reach or arrange the enclosure not to be touched because of the danger of burn.
- Please do not move the fixture body under the situation the pan/tilt lock works.
- Please do not unfasten the set crew for pan/tilt lock too much. Otherwise, it may be dropped and lost.
- In order to prevent the falling, please install the safety clip attached to the fixture side cable with a screw (M4), in a firm place.
- Please be sure to install the fixture on an iron plate without irregularities.
- After installing the fixture, please ensure that sufficient holding power is secured and not falling.
- Do not put the fixture close to electronic medical equipment such as pacemaker.
- Do not bring the fixture closer to the magnetic storage medium (Floppy disk, magnetic card, etc.).
- Do not place the fixture close to various kinds of electronic equipment, video equipment, communication equipment (mobile phone, clock, etc.).
- Since there is a risk of the magnet being damaged, please do not make impact to the fixture.
- Please do not use under hot and humid environment.