

SERIES

**ModuleX®80**


FUNCTION

FOUNDATION down light

CAT, No.

MSP-080F/WC・MC/FLF/F/10B/DL/3

**Discontinued product**




**SPECIFICATION**

- Light Source LED Module (Mounted)
- Light Distribution Flood (F)
- Cone White Cone(WC)  
Matte Black Cone(MC)
- Dedicated Driver Constant current ( 50/60Hz shared)
- Fixture Input Voltage 18. 6V
- Fixture Input Current 0. 48A (0. 5A MAX)
- Weight 220g
- Attached safety wire

**PRODUCT CODE**

MSP-080F/WC/FLF/F/10B27/DL/3  
MSP-080F/WC/FLF/F/10B30/DL/3  
MSP-080F/WC/FLF/F/10B35/DL/3  
MSP-080F/WC/FLF/F/10B40/DL/3  
MSP-080F/MC/FLF/F/10B27/DL/3  
MSP-080F/MC/FLF/F/10B30/DL/3  
MSP-080F/MC/FLF/F/10B35/DL/3  
MSP-080F/MC/FLF/F/10B40/DL/3

[ mm]

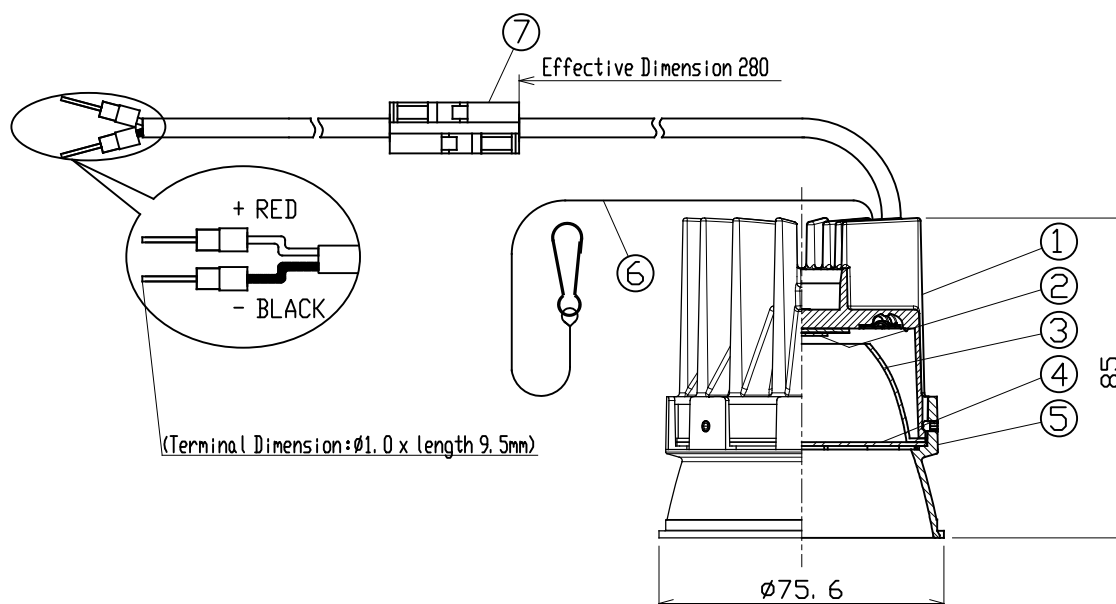

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Filter	Resin	
5	Cone	ADC	Acrylic Baking Finish
6	Safety Wire	Stainless Steel	
7	Safety Connector	Resin	

**ATTENTION**

- Use within 0℃~35℃ ambient temperature range.
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0. 2m or more.
- Danger ! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.  
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the "class2" driver. In that case, grounding is not required.

**ModuleX®**  
ModuleX Inc.

SPECIFICATION SHEET

SCALE  
1 / 2

CREATED DATE  
1/APR/2020

REVISION DATE