


Discontinued product




SPECIFICATION


- Light Source LED Module (Mounted)
- Cone Chrome Cone(CC)
- Flame White(SWF), Matte black(SMF)
- Light Distribution Flood(F)
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
- Input Current 0.089A (Dedicated driver input voltage, 220V input)
- Power Consumption 0.087A (Dedicated driver input voltage, 240V input)
- 16.8W (Included dedicated driver, 220V input)
- 17.0W (Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 19.5V
- Fixture Input Current 0.7A
- Dimming signal input current 2mA
- Weight 480g (Driver weight is included)
- Safety wire included

PRODUCT CODE

MSP-080F/CC/SWF・SMF/F/11B27/Z2/3
MSP-080F/CC/SWF・SMF/F/11B30/Z2/3
MSP-080F/CC/SWF・SMF/F/11B35/Z2/3
MSP-080F/CC/SWF・SMF/F/11B40/Z2/3

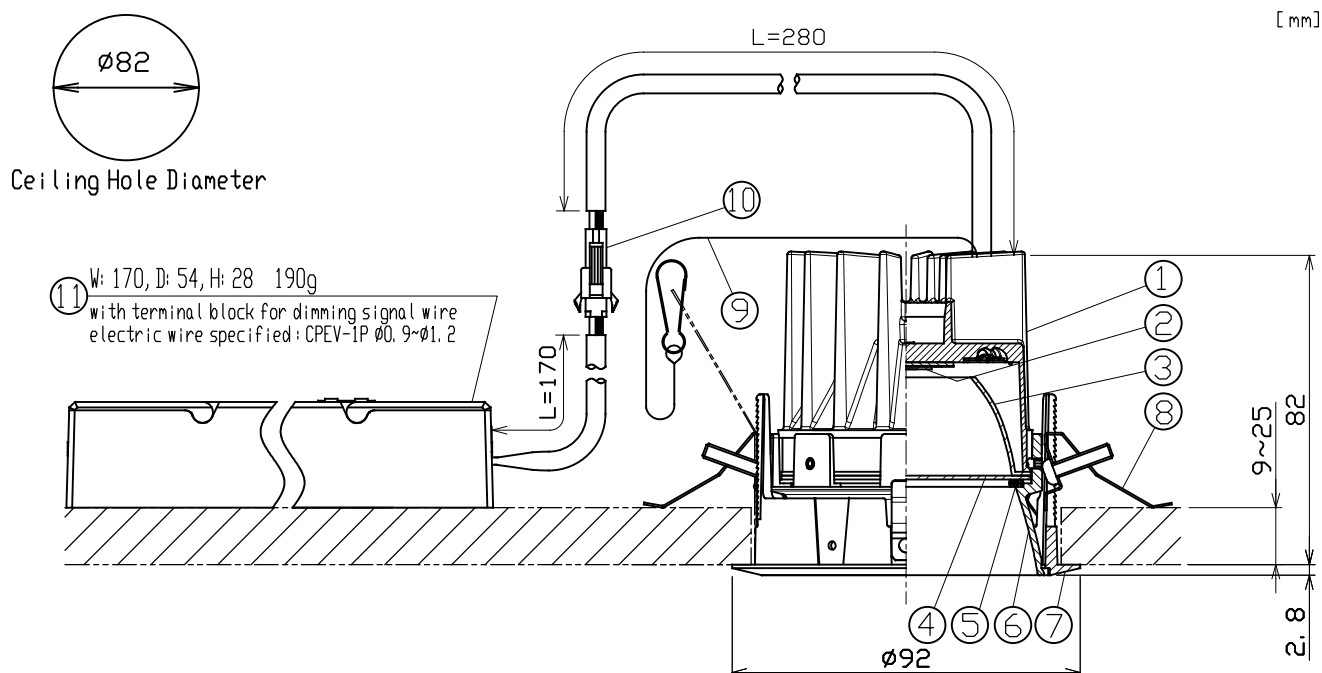

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Filter	Resin	
5	Packing	EPT Sponge	Black
6	Cone	ADC	Plating Finish
7	Mounting Frame	ADC	Acrylic Baking Finish
8	Mounting spring	Stainless Steel	
9	Safety wire	Stainless Steel	
10	Safety connector	Resin	
11	Dedicated Driver		0-10V control dimming system

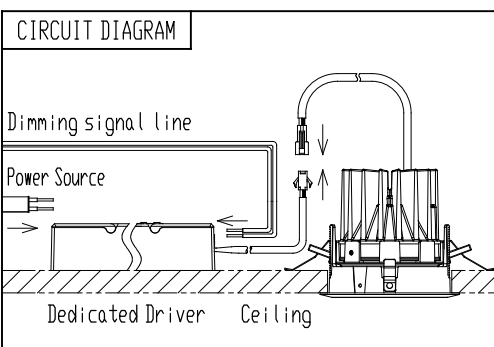

ATTENTION

- Use within 0℃~35℃ ambient temperature range.
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0.2m or more.
- Danger! Do not remodel fixtures.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- The height of inside the ceiling have to be 150mm or more to install the driver there.
- Use DALI control dimming system (SR-2830AS-1-10) only.
- Calculate the capacity in accordance with JIS C8155 standard.
- There is no sending terminal block on the dedicated driver (primary side).
- This instrument is for ceiling embedded only.
- Can not be installed on inclined ceilings, walls and so on.

