


**SPECIFICATION**

- Light Source LED Module (Mounted)
- Cone White Cone(WC)・Matte Black Cone(MC)  
Chrome Cone(CC)
- Approved Driver Constant current (Sold Separately)
- Fixture Input Voltage 36.8V
- Fixture Input Current 0.7A MAX
- Weight 390g
- Attached Safety Wire

**PRODUCT CODE**

MMP-080W/WC/FLF/O/20B27/DL/3  
MMP-080W/WC/FLF/O/20B30/DL/3  
MMP-080W/WC/FLF/O/20B35/DL/3  
MMP-080W/WC/FLF/O/20B40/DL/3  
MMP-080W/MC/FLF/O/20B27/DL/3  
MMP-080W/MC/FLF/O/20B30/DL/3  
MMP-080W/MC/FLF/O/20B35/DL/3  
MMP-080W/MC/FLF/O/20B40/DL/3  
MMP-080W/CC/FLF/O/20B27/DL/3  
MMP-080W/CC/FLF/O/20B30/DL/3  
MMP-080W/CC/FLF/O/20B35/DL/3  
MMP-080W/CC/FLF/O/20B40/DL/3

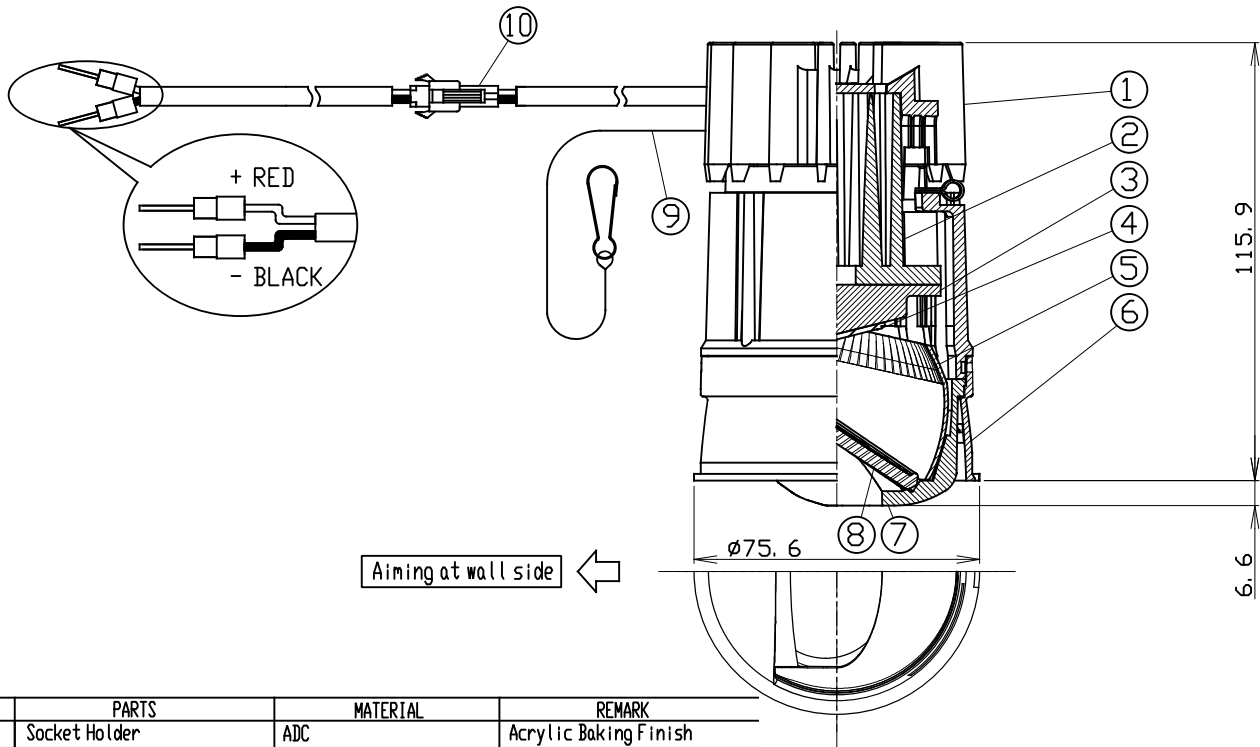

PARTS	MATERIAL	REMARK
1 Socket Holder	ADC	Acrylic Baking Finish
2 LCL Fixture	ADC	Acrylic Baking Finish
3 Body	ADC	Acrylic Baking Finish
4 LED Module		
5 Reflector	Aluminum	
6 Cone	ADC	Acrylic Baking Finish(WC・MC) Plating Finish(CC)
7 Cone Cover	ADC	Acrylic Baking Finish(WC・MC) Plating Finish(CC)
8 Lens Filter	Hard Glass	
9 Safety Wire	Stainless Steel	
10 Safety Connector	Resin	

- ATTENTION**
- Do not cover fixtures with the heat insulator etc.
  - Please use constant current driver.
  - Connect input-side power wire to the approved driver directly.
  - Danger! Do not remodel fixtures.
  - Use within 0℃~35℃ ambient temperature range
  - Connect a safety wire to the fixture and mounting frame directly.
  - Emission color and brightness would be different even within the same model.
  - Keep distance of the fixtures and objects 0.1m or more.
  - Please do not remove safety connector