

SPECIFICATION

- Light Source LED Module (Mounted)
- Light Distribution N=Narrow, M=Medium
- Cone White Cone(WC)
Matt black Cone(MC)
Chrome Cone(CC)
- Frame White(SWF), Matt Black(SMF)
- Approved Driver Constant current (Sold Separately)
- Fixture Input Voltage 35.4V
- Fixture Input Current 0.6A
- Weight 580g
- Attached Safety Wire


PRODUCT CODE

MMP-100A/WC/SWF/N・M/20A/S1/DL/3
MMP-100A/WC/SWF/N・M/20A/S1/DL/3
MMP-100A/WC/SWF/N・M/20A/S1/DL/3
MMP-100A/WC/SWF/N・M/20A/S1/DL/3
MMP-100A/MC/SWF・SMF/N・M/20A/S1/DL/3
MMP-100A/MC/SWF・SMF/N・M/20A/S1/DL/3
MMP-100A/MC/SWF・SMF/N・M/20A/S1/DL/3
MMP-100A/MC/SWF・SMF/N・M/20A/S1/DL/3
MMP-100A/CC/SWF・SMF/N・M/20A/S1/DL/3
MMP-100A/CC/SWF・SMF/N・M/20A/S1/DL/3
MMP-100A/CC/SWF・SMF/N・M/20A/S1/DL/3
MMP-100A/CC/SWF・SMF/N・M/20A/S1/DL/3

OPTION

Full Spread Lens Filter MLA-100/SF01
Semi Spread Lens Filter MLA-100/SS01
Full Diffuser Lens Filter MLA-100/DF01
Semi Diffuser Lens Filter MLA-100/DS02
Edge Control Lens Filters MLA-100/EC02

(mm)

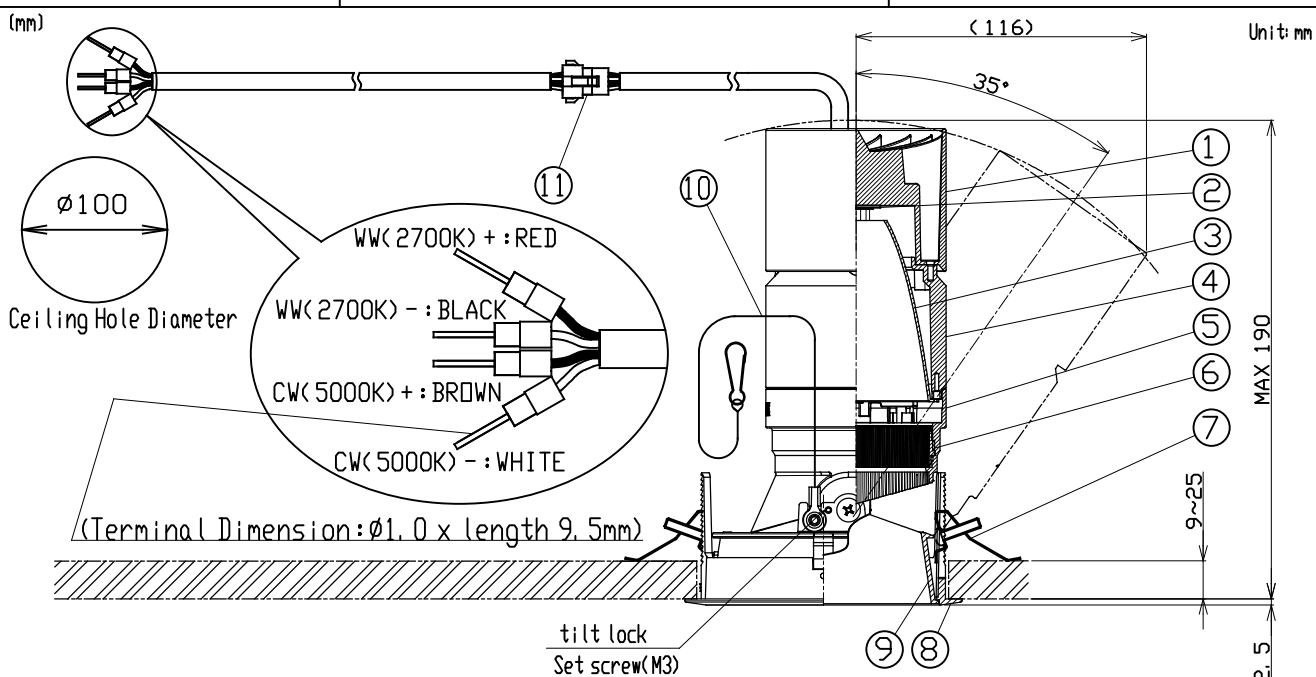

| | PARTS | MATERIAL | REMARK |
|----|----------------------|-----------------|--|
| 1 | Socket Holder | ADC | Acrylic Baking Finish |
| 2 | LED Module | | |
| 3 | Reflector | Aluminum | |
| 4 | Body | ADC | Acrylic Baking Finish |
| 5 | Hood | ADC | Acrylic Baking Finish |
| 6 | Option Holder | ADC | Acrylic Baking Finish |
| 7 | Unit Mounting Spring | Stainless Steel | |
| 8 | Mounting Frame | ADC | Acrylic Baking Finish |
| 9 | Cone | ADC | Acrylic Baking Finish(WC・MC) Plating Finish(CC) |
| 10 | Safety Wire | Stainless Steel | |
| 11 | Safety Connector | Resin | |

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Keep distance of the fixtures and objects 0.3m or more.
- Please before attachment to the frame when performing the tilt lock.
- Please do not unfasten the set crew for panm/tilt lock too much. Otherwise, it may be dropped and lost.
- Please do not remove safety connector.
- Tilt scales may cause manufacturing angular errors. Please use as a guide.
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur.
(Some foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)