

SERIES


**ModuleX 80**

FUNCTION

FOUNDATION down light

CAT. No.

MSP-080F/FLF/F/11C/DL/3




**SPECIFICATION**

- Light Source LED Module (Mounted) #Ra93 Typ
- Light Distribution F=Flood
- Cone Chrome Cone (CC)
- Approved Driver White Cone (WC) . Matt Black Cone (MC)
- Fixture Input Voltage Constant current (Sold Separately)
- Fixture Input Current 18. 7V
- Weight 0. 7A MAX
- Attached safety wire 200g

**PRODUCT CODE**

MSP-080F/CC・MC・WC/FLF/F/11C27/DL/3  
 MSP-080F/CC・MC・WC/FLF/F/11C30/DL/3  
 MSP-080F/CC・MC・WC/FLF/F/11C35/DL/3  
 MSP-080F/CC・MC・WC/FLF/F/11C40/DL/3

[ mm]

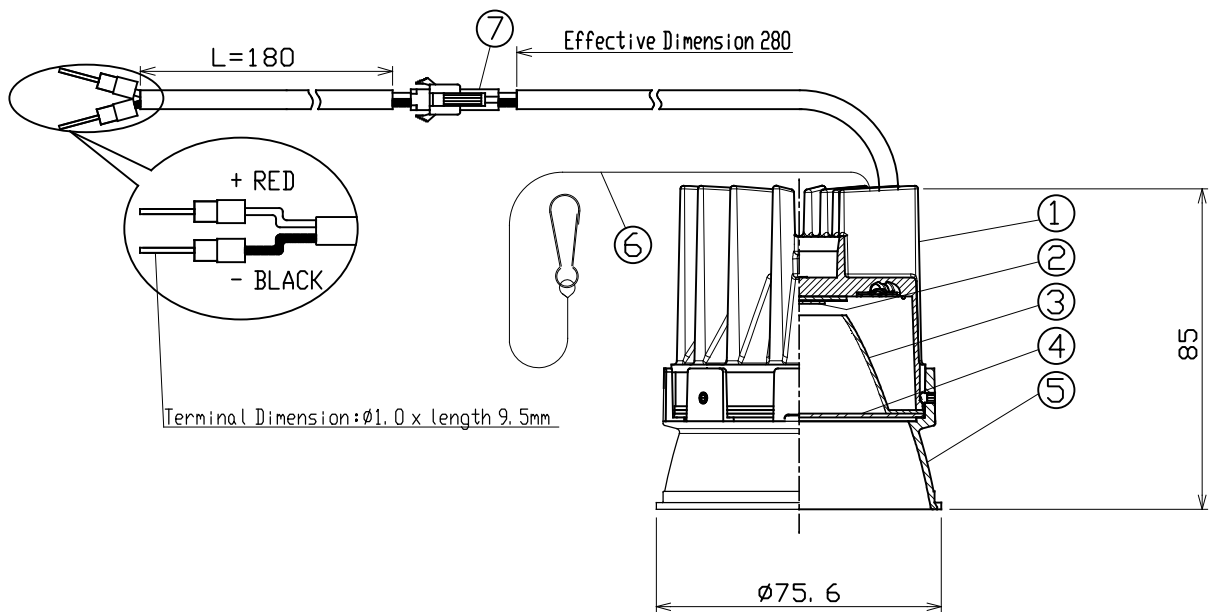

|   | PARTS            | MATERIAL        | REMARK                                           |
|---|------------------|-----------------|--------------------------------------------------|
| 1 | Body             | ADC             | Acrylic Baking Finish                            |
| 2 | LED Module       |                 |                                                  |
| 3 | Reflector        | Aluminum        |                                                  |
| 4 | Filter           | Resin           |                                                  |
| 5 | Cone             | ADC             | CC:Plating Finish<br>MC/WC:Acrylic Baking Finish |
| 6 | Safety Wire      | Stainless Steel |                                                  |
| 7 | Safety Connector | Resin           |                                                  |

**ATTENTION**

- Use within 0℃~35℃ ambient temperature range.
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0. 2m or more.
- Danger ! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.  
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the 'class2' driver. In that case, grounding is not required.
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur.  
(Some foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)

**ModuleX**  
 ModuleX Inc.

SPECIFICATION SHEET

SCALE

1 / 2

CREATED DATE

31/MAR/2024

REVISION DATE