


Discontinued product




SPECIFICATION



- Light Source LED Module (Mounted)
- WALL Cone White Cone(WC), Matte Black Cone(MC)
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
- Input Current 0.148A (Dedicated driver input voltage, 220V input)
0.136A (Dedicated driver input voltage, 240V input)
- Power Consumption 29.3W (Included dedicated driver, 220V input)
29.4W (Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 36.8V
- Fixture Input Current 0.7A
- Dimming signal input current 2mA
- Weight 390g (Driver weight is included)
- Safety wire included

PRODUCT CODE

- MSP-080W/MC/FLF/0/20B27/Z2/3
- MSP-080W/MC/FLF/0/20B30/Z2/3
- MSP-080W/MC/FLF/0/20B35/Z2/3
- MSP-080W/MC/FLF/0/20B40/Z2/3
- MSP-080W/MC/FLF/0/20B27/Z2/3
- MSP-080W/MC/FLF/0/20B30/Z2/3
- MSP-080W/MC/FLF/0/20B35/Z2/3
- MSP-080W/MC/FLF/0/20B40/Z2/3

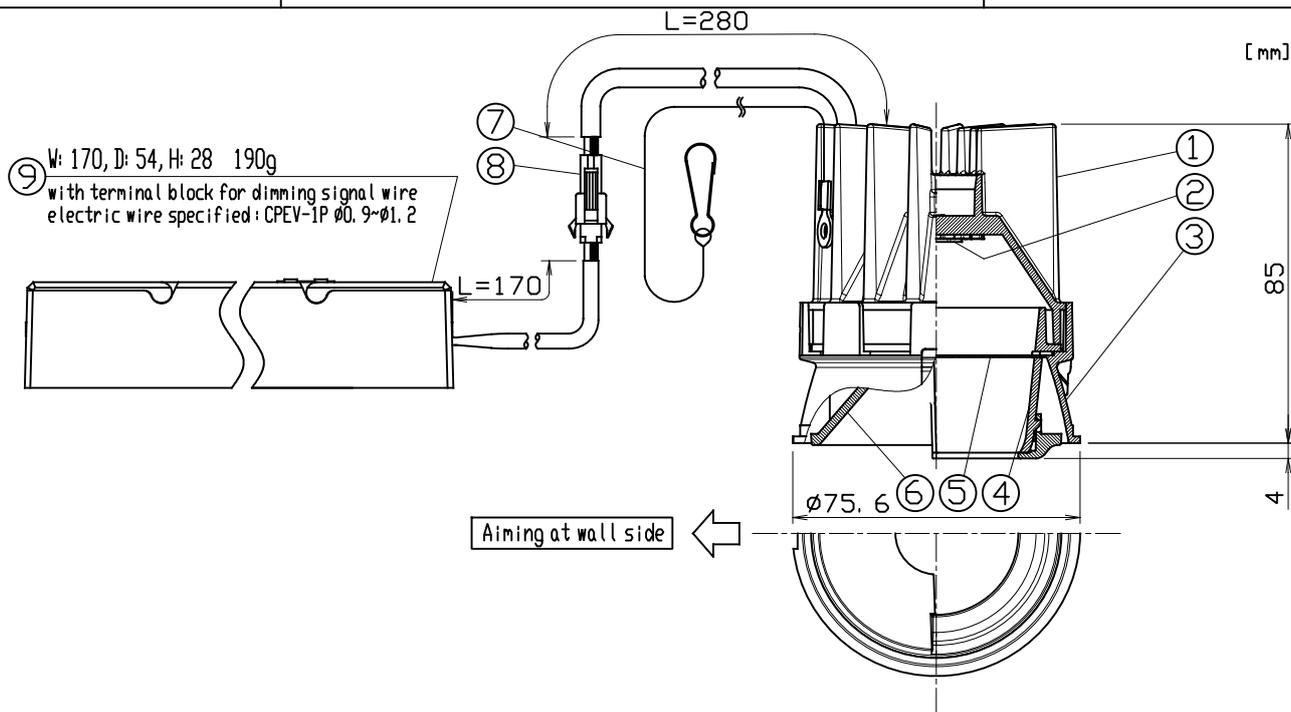

PARTS	MATERIAL	REMARK
1 Body	ADC	Acrylic Baking Finish
2 LED Module		
3 Cone	ADC	Acrylic Baking Finish
4 Reflector	Resin	
5 Filter	Resin	
6 WALL Cone	Resin	
7 Safety Wire	Stainless Steel	
8 Safety connector	Resin	
9 Dedicated Driver		0-10V control dimming system

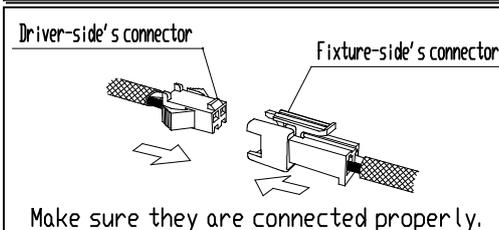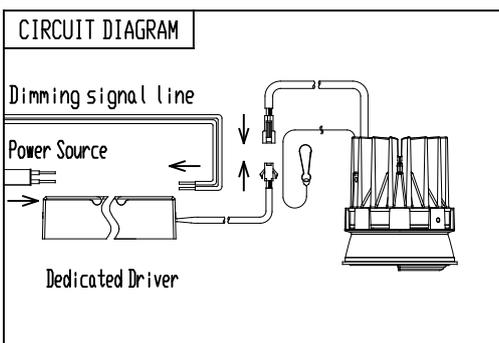

- ATTENTION**
- Use within 0~35℃ ambient temperature range.
 - Do not cover the fixture with a heat insulator etc.
 - Keep distance of the fixture and objects 0.1m or more.
 - Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
 - Be sure to connect a safety wire to the fixture and mounting frame.
 - Because there are variations in the LEDs, emission color and brightness would be different even within the same model.
 - Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only.
 - When connecting to the electric circuit, calculate the capacity in accordance with JIS C8155 standard.
 - The fixture is ceiling mounting exclusive use. Do not mount inclined ceilings or walls.
 - Danger! Do not remodel the fixture.

- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.