

SPECIFICATION

- Light Source LED Module (Mounted)
- Body White(W), Matte black(M), Silver(S)
- Light Distribution Narrow(N), Medium(M)
- Vertical aiming angle Upper10°, Lower90°
- Horizontal aiming angle 380°
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 37.9V
- Fixture Input current 0.9A(MAX)
- Weight 640g
- tool for pan/tilt lock is equipped


PRODUCT CODE

- MMP-100S/1H/W·M·S/MS/N·M/30B27/DL/3
- MMP-100S/1H/W·M·S/MS/N·M/30B30/DL/3
- MMP-100S/1H/W·M·S/MS/N·M/30B35/DL/3
- MMP-100S/1H/W·M·S/MS/N·M/30B40/DL/3


OPTION

- Full Diffuser Lens Filter MLA-100/DF01
- Semi Diffuser Lens Filter MLA-100/DS02
- Full Spread Lens Filter MLA-100/SF01
- Semi Spread Lens Filter MLA-100/SS01
- Edge Control Lens Filters MLA-100/EC02
- Sharpener Lens MLA-100/SH01
- (available only for narrow distribution)

[mm]

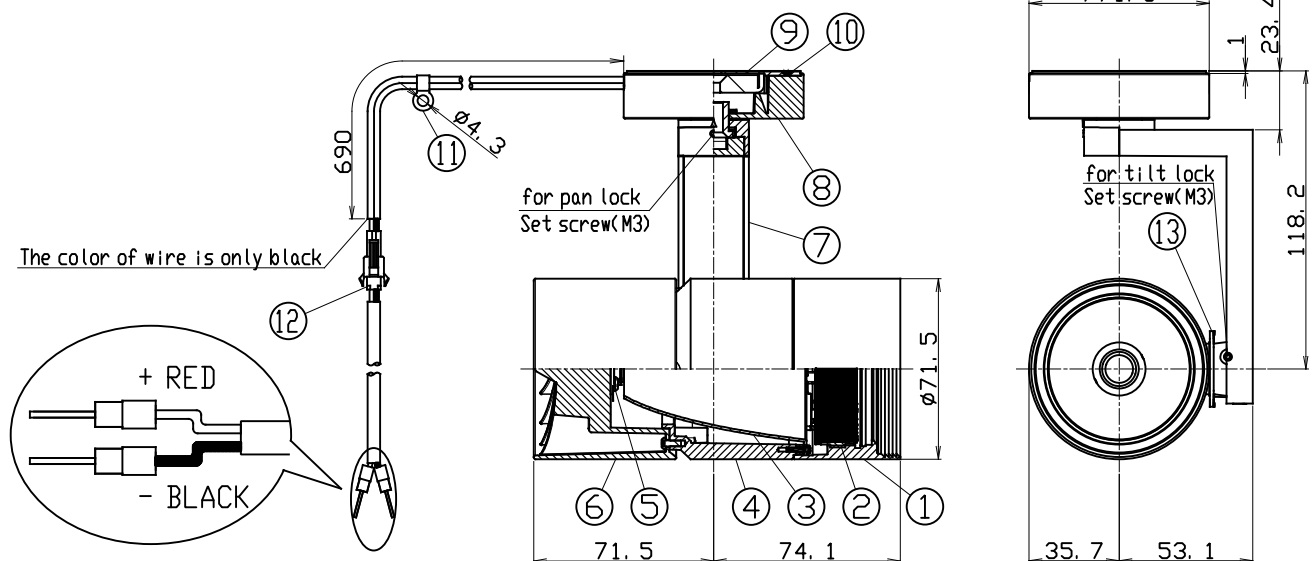

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Option Holder	ADC	Acrylic Baking Finish
3	Reflector	Aluminum	
4	Body	ADC	Acrylic Baking Finish
5	LED Module		
6	Socket Holder	ADC	Acrylic Baking Finish
7	Arm	ADC	Acrylic Baking Finish
8	Magnet Case	ADC	Acrylic Baking Finish
9	Magnet		
10	Magnet cover	Resin	with Nonslip Sheet
11	Safety clip	Brass	
12	Safety connector	Resin	
13	Tilt Protractor	Resin	

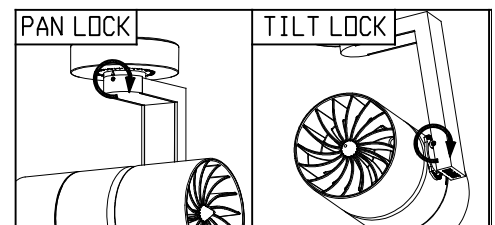

ATTENTION

- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Danger! Do not remodel the fixture.
- Please do not irradiate the lamp upward. Dust accumulates in the light emitting part, which may cause fire.
- Keep distance of the fixture and objects 0.3m or more.
- Use within 0℃~35℃ ambient temperature range
- Prevent anybody except installers or coordinators from getting in arm's reach or arrange the enclosure not to be touched because of the danger of burn.
- Please do not move the fixture body under the situation the pan/tilt lock works.
- Please do not unfasten the set crew for pan/tilt lock too much. Otherwise, it may be dropped and lost.
- In order to prevent the falling, please install the safety clip attached to the fixture side cable with a screw (M4), in a firm place within 300mm from the appliance.
- Please be sure to install the fixture on an iron plate without irregularities.
- After installing the fixture, please ensure that sufficient holding power is secured and not falling.
- Do not put the fixture close to electronic medical equipment such as pacemaker.
- Do not bring the fixture closer to the magnetic storage medium (floppy disk, magnetic card, etc.).
- Do not place the fixture close to various kinds of electronic equipment, video equipment, communication equipment (mobile phone, clock, etc.).
- Since there is a risk of the magnet being damaged, please do not make impact to the fixture.
- Please do not use under hot and humid environment.