


**Discontinued product**



**SPECIFICATION**

- Light Source
- Mounting Frame
- WALL Cone
- Dimming method
- Input Voltage
- Input Current

- Power Consumption


#The power consumption is measured based on the measuring method, JIS C 8105-3.

- Dedicated Driver
- Fixture Input Voltage
- Fixture Input Current
- Dimming signal input current
- Weight
- Safety wire included

LED Module (Mounted)  
 White(SWF)・Matte Black (SMF)  
 White Cone(WC)  
 0-10V  
 220V±6%, 240V±6%(Dedicated driver input voltage)  
 0.200A (Dedicated driver input voltage, 220V input)  
 0.184A (Dedicated driver input voltage, 240V input)  
 39.6W (Included dedicated driver, 220V input)  
 39.8W (Included dedicated driver, 240V input)  
 Constant current (50/60Hz shared)  
 37.8V  
 0.9A  
 2mA  
 760g (Driver weight is included)

**PRODUCT CODE**

MSP-100W/WC/SWF/0/30B27/Z2/3  
 MSP-100W/WC/SWF/0/30B30/Z2/3  
 MSP-100W/WC/SWF/0/30B35/Z2/3  
 MSP-100W/WC/SWF/0/30B40/Z2/3  
 MSP-100W/MC/SWF・SMF/0/30B27/Z2/3  
 MSP-100W/MC/SWF・SMF/0/30B30/Z2/3  
 MSP-100W/MC/SWF・SMF/0/30B35/Z2/3  
 MSP-100W/MC/SWF・SMF/0/30B40/Z2/3

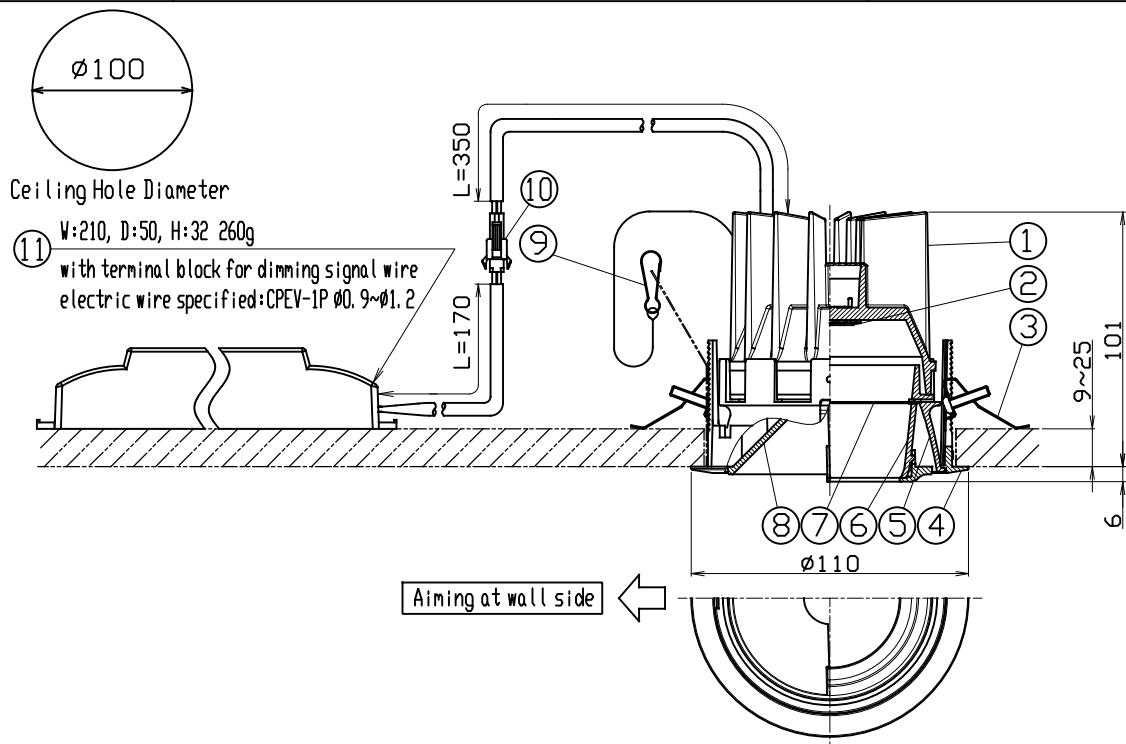

[mm]

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Unit Mounting Spring	Stainless Steel	
4	Mounting Frame	ADC	Acrylic Baking Finish
5	Cone	ADC	Acrylic Baking Finish
6	Reflector	Resin	
7	Optical Filter	Resin	
8	WALL Cone	Resin	
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	
11	Dedicated Driver		0-10V control dimming system

**ATTENTION**

- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Danger! Do not remodel fixtures.
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0.2m or more.
- Use within 0~35℃ ambient temperature range.
- Connect a safety wire to the fixture and mounting frame directly.
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the approved driver directly.
- Use 0-10V control dimming system (SR-2830AS-1-10) only.
- Calculate the capacity in accordance with JIS C8155 standard.
- The height of inside the ceiling have to be 150mm or more to install the driver there.
- The fixture is ceiling mounting exclusive use. Do not mount inclined ceilings or walls.

