

SPECIFICATION

- Light Source LED Module (Mounted)
 - Light Distribution Narrow(N), Medium(M), Wide(W)
 - Body White(WC), Matte black(MC), Silver(SC)
 - Dimming method 0-10V
 - Vertical Aiming Angle MAX 100°
 - Horizontal Aiming Angle 360°
 - Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
 - Input current 0.089A(Dedicated driver input voltage, 220V input)
0.087A(Dedicated driver input voltage, 240V input)
 - Power Consumption 16.8W(Included dedicated driver, 220V input)
17.0W(Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
 - Fixture Input voltage 19.5V
 - Fixture Input current 0.7A
 - Dimming signal input current 2mA
 - Weight 420g(Includes dedicated driver)


PRODUCT CODE

SL-535/80DF/Z102/N·M·W/R24B/WC·MC·SC
SL-535/80DF/Z102/N·M·W/R27B/WC·MC·SC
SL-535/80DF/Z102/N·M·W/R30B/WC·MC·SC
SL-535/80DF/Z102/N·M·W/R35B/WC·MC·SC
SL-535/80DF/Z102/N·M·W/R40B/WC·MC·SC

OPTION



Full Diffuser Lens Filter MLA-080/DF01
Semi Diffuser Lens Filter MLA-080/DS03
Full Spread Lens Filter MLA-080/SF01
Semi Spread Lens Filter MLA-080/SS01
Edge Control Lens Filter MLA-080/EC02

[mm]

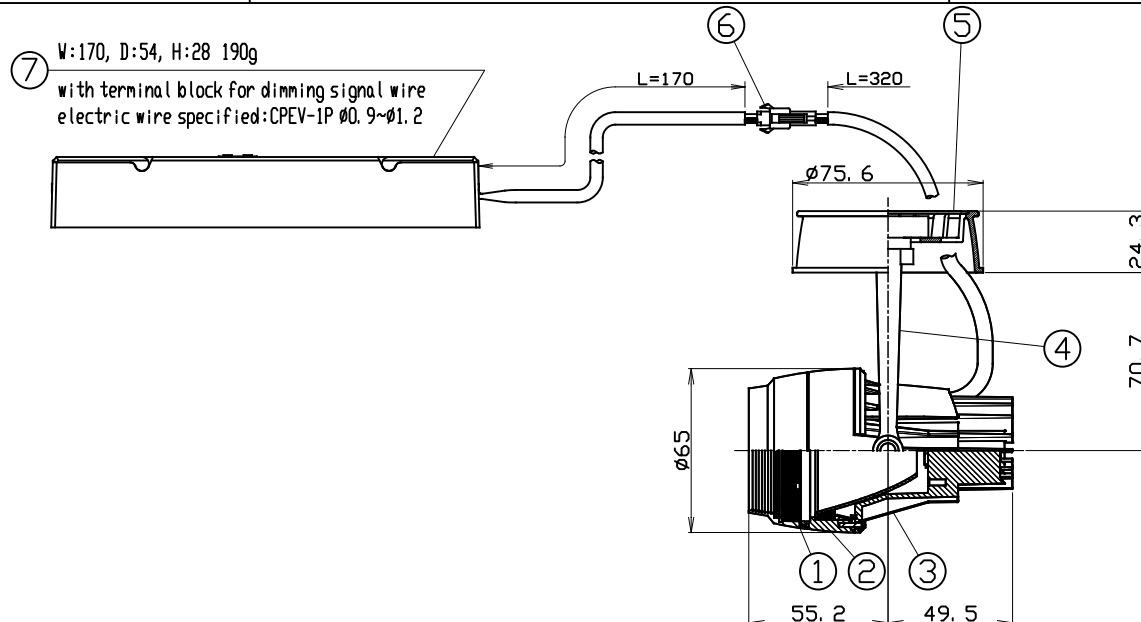

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Heat conductive body	ADC	Acrylic Baking Finish
4	Arm	Steel Plate	Acrylic Baking Finish
5	Cone	ADC	Acrylic Baking Finish
6	Safety Connector	Resin	
7	Dedicated Driver		0-10V control dimming system

CIRCUIT DIAGRAM

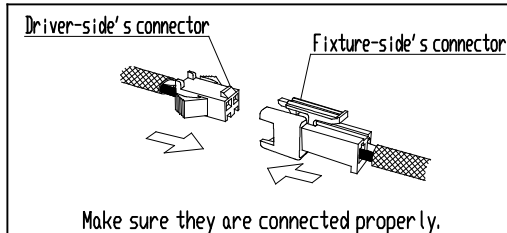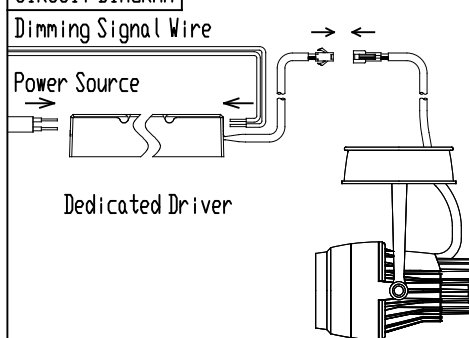

ATTENTION

- Use within 0°C~35°C ambient temperature range.
- Because there are variations in the LEDs, Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Danger! Do not remodel the fixture.
- To remove the hood, remove it with the hood facing down.
- When mounting the Fixture in a ceiling cavity etc. where heat is difficult to escape, be sure to open a vent in the upper part. (Open the vent evenly over the ceiling cavity surface to an opening ratio of 5% or more with respect to the area of the ceiling cavity.)
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only.
- When connecting to the electric circuit, calculate the capacity in accordance with JIS C8155 standard.
- Keep distance of the fixture and objects 0.1m or more.