

SERIES


ModuleX 80

FUNCTION

Adjustable downlight

CAT, No.

MSP-080A/SWF・SMF/M・W/12C/DL/3



SPECIFICATION

- Light Source LED Module (Mounted) #Ra93 Typ
- Light Distribution M:Medium, W:Wide
- Frame Color White Frame(SWF)
Black Frame(SMF)
- Cone Color White Cone(WC)
Matte Black Cone(MC)
Chrome Cone(CC)
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 35.0V
- Fixture Input Current 0.48A (0.5A MAX)
- Weight 340g
- Attached Safety Wire


PRODUCT CODE

MSP-080A/WC/SWF・SMF/M・W/12C27/DL/3
 MSP-080A/WC/SWF・SMF/M・W/12C30/DL/3
 MSP-080A/WC/SWF・SMF/M・W/12C35/DL/3
 MSP-080A/WC/SWF・SMF/M・W/12C40/DL/3

 MSP-080A/MC/SWF・SMF/M・W/12C27/DL/3
 MSP-080A/MC/SWF・SMF/M・W/12C30/DL/3
 MSP-080A/MC/SWF・SMF/M・W/12C35/DL/3
 MSP-080A/MC/SWF・SMF/M・W/12C40/DL/3

 MSP-080A/CC/SWF・SMF/M・W/12C27/DL/3
 MSP-080A/CC/SWF・SMF/M・W/12C30/DL/3
 MSP-080A/CC/SWF・SMF/M・W/12C35/DL/3
 MSP-080A/CC/SWF・SMF/M・W/12C40/DL/3

[mm]

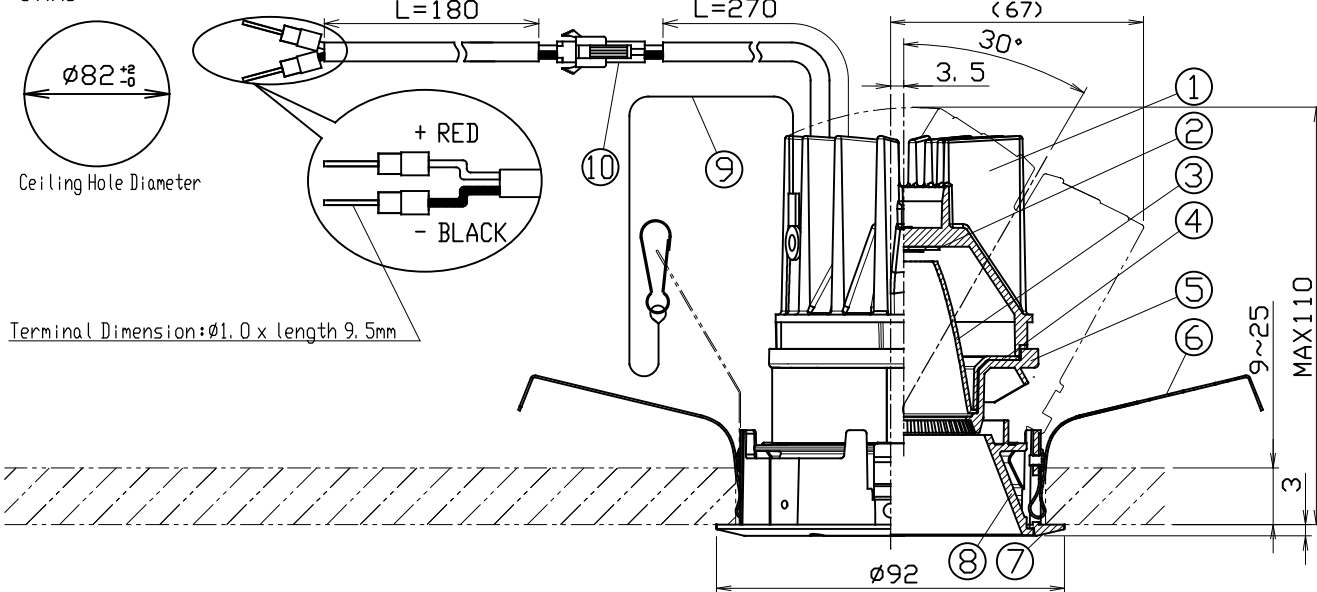

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Reflector Holder	ADC	Acrylic Baking Finish
5	Hood	ADC	Acrylic Baking Finish
6	Frame Spring	SUS	
7	Frame	ADC	Acrylic Baking Finish
8	Cone	ADC	Acrylic Baking Finish(WC・MC) Plating Finish(CC)
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	

ATTENTION

- Please use constant current driver.
- Please use the 'class2' driver. In that case, grounding is not required.
- Please do not plug in the wrong electrode to the applicable driver.
It may cause shortening of LED lifetime or the damage to the LED component.
- Please do not remove safety connector
- Do not cover fixtures with the heat insulator etc.
- Connect input-side power wire to the dedicated driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Calculate the capacity in accordance with JIS C8155 standard.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Keep distance of the fixtures and objects 0.2m or more.
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur.
(Some foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)

ModuleX

ModuleX Inc.

SPECIFICATION SHEET

SCALE

1/2

CREATED DATE

31/MAY/2024

REVISION DATE