


Discontinued product




SPECIFICATION

- Light Source LED Module (Mounted)
- Light Distribution F=Flood
- Mounting Frame White(PWF)・Matte Black (PMF)
- Cone Color White Cone(WC)
- Dedicated Driver Matte Black Cone(MC)
- Fixture Input Voltage Constant current (50/60Hz shared)
- Fixture Input Current 18. 6V
- Weight 0. 48A (0. 5A MAX)
- Attached safety wire 290g

PRODUCT CODE

MSP-080F/WC/PWF/F/10B27/DL/3
MSP-080F/WC/PWF/F/10B30/DL/3
MSP-080F/WC/PWF/F/10B35/DL/3
MSP-080F/WC/PWF/F/10B40/DL/3
MSP-080F/MC/PWF・PMF/F/10B27/DL/3
MSP-080F/MC/PWF・PMF/F/10B30/DL/3
MSP-080F/MC/PWF・PMF/F/10B35/DL/3
MSP-080F/MC/PWF・PMF/F/10B40/DL/3

IP45

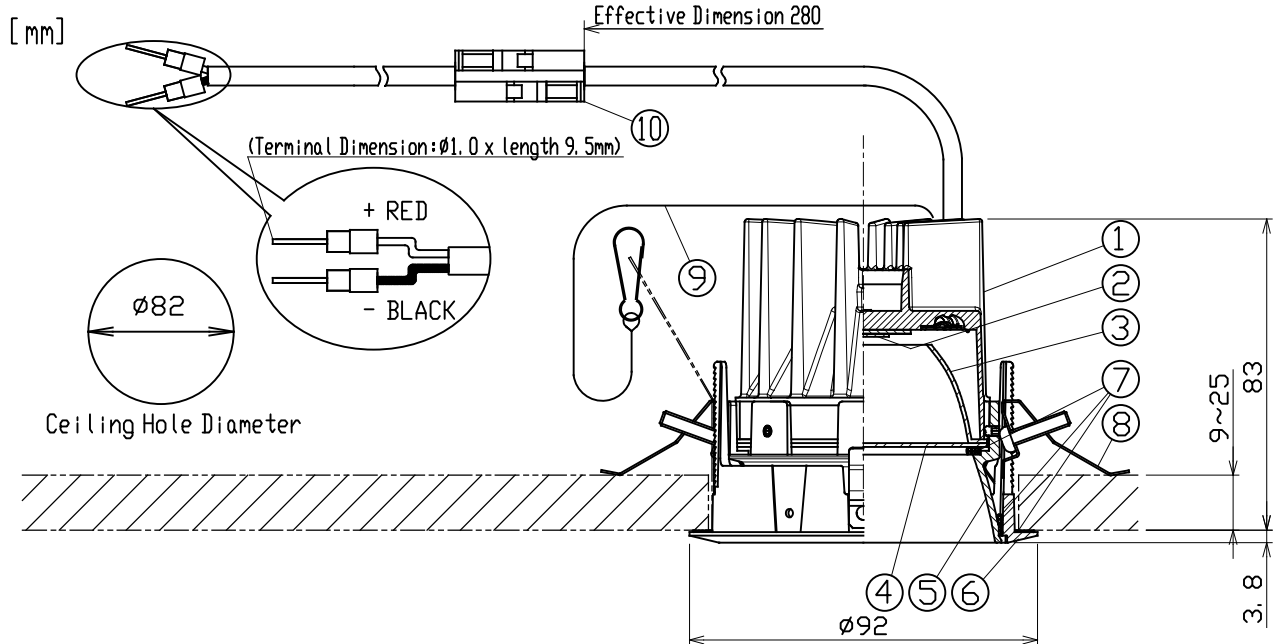

| | PARTS | MATERIAL | REMARK |
|----|----------------------|-----------------|-----------------------|
| 1 | Body | ADC | Acrylic Baking Finish |
| 2 | LED Module | | |
| 3 | Reflector | Aluminum | |
| 4 | Filter | Resin | |
| 5 | Cone | ADC | Acrylic Baking Finish |
| 6 | Mounting Frame | ADC | Acrylic Baking Finish |
| 7 | Packing | Rubber sponge | |
| 8 | Unit Mounting Spring | Stainless Steel | |
| 9 | Safety Wire | Stainless Steel | |
| 10 | Safety Connector | Resin | |

ATTENTION

- Use within 0℃~35℃ ambient temperature range
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0. 2m or more.
- Danger! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- In the state that I put in a Mounting Frame, please do not turn the instrument. There are cases where protection performance changes.
- The water-resistance capability with indoor and within the ceiling is different.
- There is no water resistance capability on the ceiling side. Do not install at places where water comes in within the ceiling.
- Do not use in high-humidity areas such as saunas.
- Do not install in any directions other than downward.
- If the irregularities of the ceiling material is large, please be flat.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the "class2" driver. In that case, grounding is not required.