


Discontinued product



SPECIFICATION

- Light Distribution Narrow(N)・Medium(M)・Wide(W)
- Body Matte black(MC)
- Vertical Aiming Angle 100°
- Horizontal Aiming Angle 360°
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 19.5V
- Fixture Input Current 0.7A (MAX)
- Weight 320g


PRODUCT CODE

- SX-505LEC/N・M・W/R24B/CE
- SX-505LEC/N・M・W/R27B/CE
- SX-505LEC/N・M・W/R30B/CE
- SX-505LEC/N・M・W/R35B/CE
- SX-505LEC/N・M・W/R40B/CE

OPTION

- Full diffuser lens MLA-080/DF01
- Semi diffuser lens MLA-080/DS03
- Full spread lens MLA-080/SF01
- Semi spread lens MLA-080/SS01
- Edge control filter MLA-080/EC02

[mm]

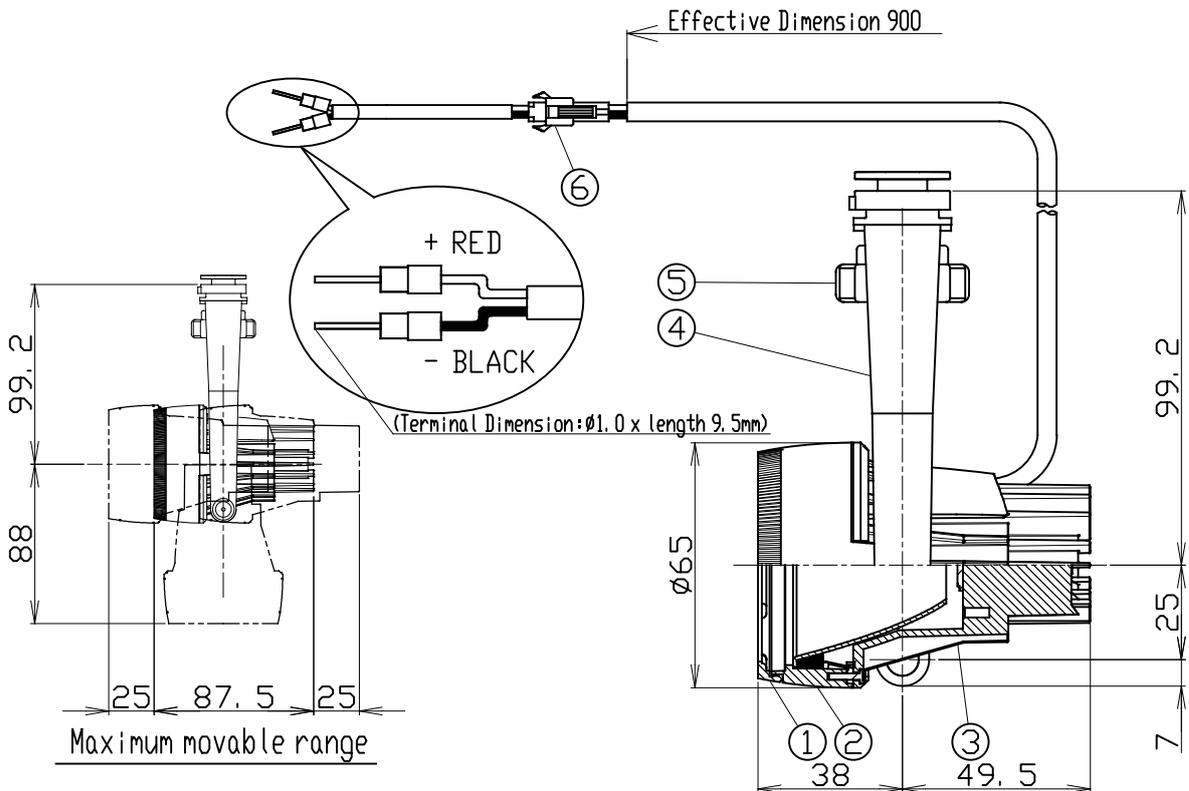

	PARTS	MATERIAL	REMARK
1	Filter Holder	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Heat Conduct Body	ADC	Acrylic Baking Finish
4	Arm	ADC	Acrylic Baking Finish
5	Grip Bolt	Resin	Black (M6)
6	Safety connector	Resin	

ATTENTION

- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Do not use fixture without filter holder.
- Use the Approved driver only.
- Do not cover fixtures with the heat insulator etc.
- Emission color and brightness would be different even within the same model.
- Connect input-side power wire to the Approved driver directly.
- Keep distance of the fixtures and objects 0.1m or more.
- Make sure the adapted-mounting (LINEAR BOX).
- Please use constant current driver.
- To remove heat, place an air hole when installing the fixture in a fitting.
(Place air holes equally in the upper side of the fitting. Total aperture size should be more than 5% of the fitting's surface)
- Please use the 'class2' driver. In that case, grounding is not required.