


Discontinued product



SPECIFICATION

- Light Source LED Module (Mounted)
- Light Distribution Narrow(N), Medium(M), Wide(W)
- Body Matte black(M)
- Dimming method 0-10V
- Vertical Aiming Angle MAX 100°
- Horizontal Aiming Angle 360°
- Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
- Input current 0.089A(Dedicated driver input voltage, 220V input)
0.087A(Dedicated driver input voltage, 240V input)
- Power Consumption 16.8W(Included dedicated driver, 220V input)
17.0W(Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 19.5V
- Fixture Input current 0.7A
- Dimming signal input current 2mA
- Weight 430g(Includes dedicated driver)


PRODUCT CODE

SX-535LE/Z102/N・M・W/R24B/M
SX-535LE/Z102/N・M・W/R27B/M
SX-535LE/Z102/N・M・W/R30B/M
SX-535LE/Z102/N・M・W/R35B/M
SX-535LE/Z102/N・M・W/R40B/M

OPTION

Full Diffuser Lens Filter MLA-080/DF01
Semi Diffuser Lens Filter MLA-080/DS03
Full Spread Lens Filter MLA-080/SF01
Semi Spread Lens Filter MLA-080/SS01
Edge Control Lens Filter MLA-080/EC02

[mm]

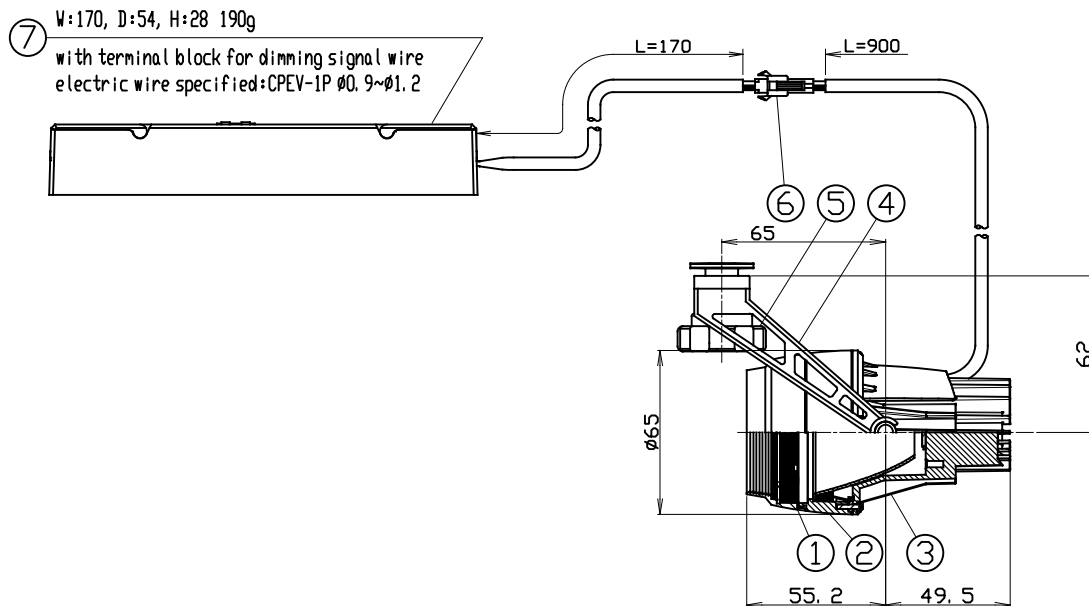

| | PARTS | MATERIAL | REMARK |
|---|----------------------|-------------|------------------------------|
| 1 | Hood | ADC | Acrylic Baking Finish |
| 2 | Body | ADC | Acrylic Baking Finish |
| 3 | Heat conductive body | ADC | Acrylic Baking Finish |
| 4 | Arm | Steel Plate | Acrylic Baking Finish |
| 5 | Grip Bolt | Resin | Black (M6) |
| 6 | Safety Connector | Resin | |
| 7 | Dedicated Driver | | 0-10V control dimming system |

ATTENTION

- Use within 0℃~35℃ ambient temperature range.
- Because there are variations in the LEDs, emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Danger! Do not remodel the fixture.
- To remove the hood, remove it with the hood facing down.
- When mounting the fixture in a ceiling cavity etc. where heat is difficult to escape, be sure to open a vent in the upper part. (Open the vent evenly over the ceiling cavity surface to an opening ratio of 5% or more with respect to the area of the ceiling cavity.)
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.
- Check the corresponding linear box.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only.
- When connecting to the electric circuit, calculate the capacity in accordance with JIS C8155 standard.
- Keep distance of the fixture and objects 0.1m or more.

CIRCUIT DIAGRAM

