


Discontinued product



SPECIFICATION

• Light Distribution	Narrow(N)・Medium(M)・Wide(W)
• Body	Matte black(MC)
• Vertical Aiming Angle	100°
• Horizontal Aiming Angle	360°
• Approved Driver	Constant current (50/60Hz shared)
• Fixture Input Voltage	19.5V
• Fixture Input Current	0.7A (MAX)
• Weight	330g


PRODUCT CODE

SX-535LEC/N・M・W/R24B/CE
SX-535LEC/N・M・W/R27B/CE
SX-535LEC/N・M・W/R30B/CE
SX-535LEC/N・M・W/R35B/CE
SX-535LEC/N・M・W/R40B/CE

OPTION

Full diffuser lens	MLA-080/DF01
Semi diffuser lens	MLA-080/DS03
Full spread lens	MLA-080/SF01
Semi spread lens	MLA-080/SS01
Edge control filter	MLA-080/EC02

[mm]

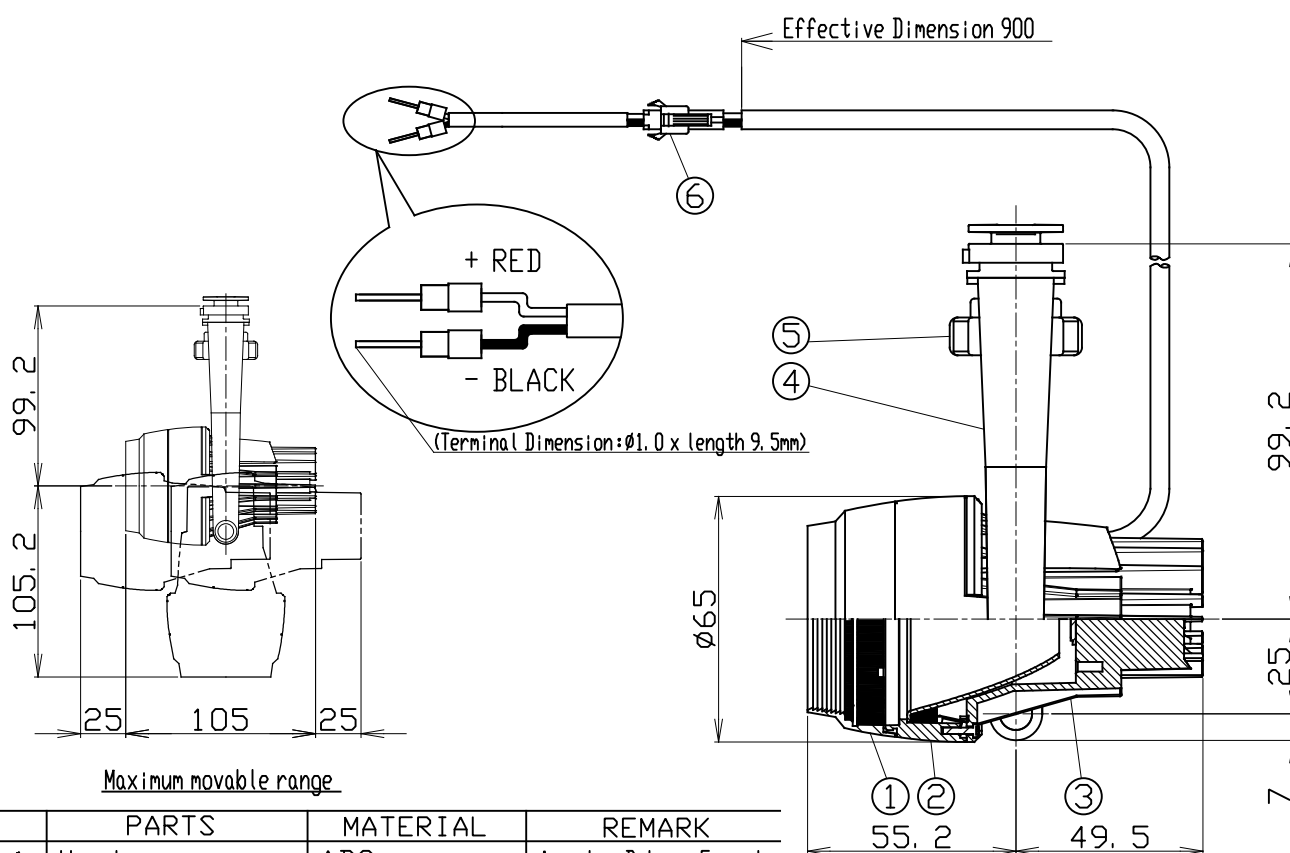

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Heat Conduct Body	ADC	Acrylic Baking Finish
4	Arm	ADC	Acrylic Baking Finish
5	Grip Bolt	Resin	Black (M6)
6	Safety connector	Resin	

ATTENTION

- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Do not use fixture without hood.
- Use the Approved driver only.
- Do not cover fixtures with the heat insulator etc.
- Emission color and brightness would be different even within the same model.
- Connect input-side power wire to the Approved driver directly.
- Keep distance of the fixtures and objects 0.1m or more.
- Make sure the adapted-mounting (LINEAR BOX).
- Please use constant current driver.
- To remove heat, place an air hole when installing the fixture in a fitting.
(Place air holes equally in the upper side of the fitting. Total aperture size should be more than 5% of the fitting's surface)
- Please use the 'class2' driver. In that case, grounding is not required.