

SPECIFICATION

- Light Source LED Module (Mounted)
- Light Distribution Wall (JW)
- Body Matte black
- Frame White(W), Matte black(M)
- Dimming method 0-10V
- Electrical specification table

	Input Voltage	Input Current (Dedicated driver input voltage)		Power Consumption (Included dedicated driver)		Fixture Input Voltage	Fixture Input Current
		220 V	240 V	220 V	240 V		
One Fixture	220V±6%, 240V±6%	0.035 A	0.033 A	7.0 W	7.2 W	9.6 V	0.5 A
Two Fixtures		0.067 A	0.065 A	12.4 W	12.6 W	19.2 V	
Three Fixtures		0.094 A	0.092 A	17.7 W	17.9 W	28.8 V	

- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Dimming signal input current 2mA
- Weight 270g(Includes dedicated driver)

PRODUCT CODE


SX-B0155D/Z102/JW/R27B/W-M
SX-B0155D/Z102/JW/R30B/W-M
SX-B0155D/Z102/JW/R35B/W-M
SX-B0155D/Z102/JW/R40B/W-M

OPTION

Extension cord L=1000 SA-CC03
Extension cord L=3000 SA-CC04

[mm]

- ⑧ W:170, D:54, H:28 190g
with terminal block for dimming signal wire
electric wire specified:CPEV-IP Ø0.9~Ø1.2

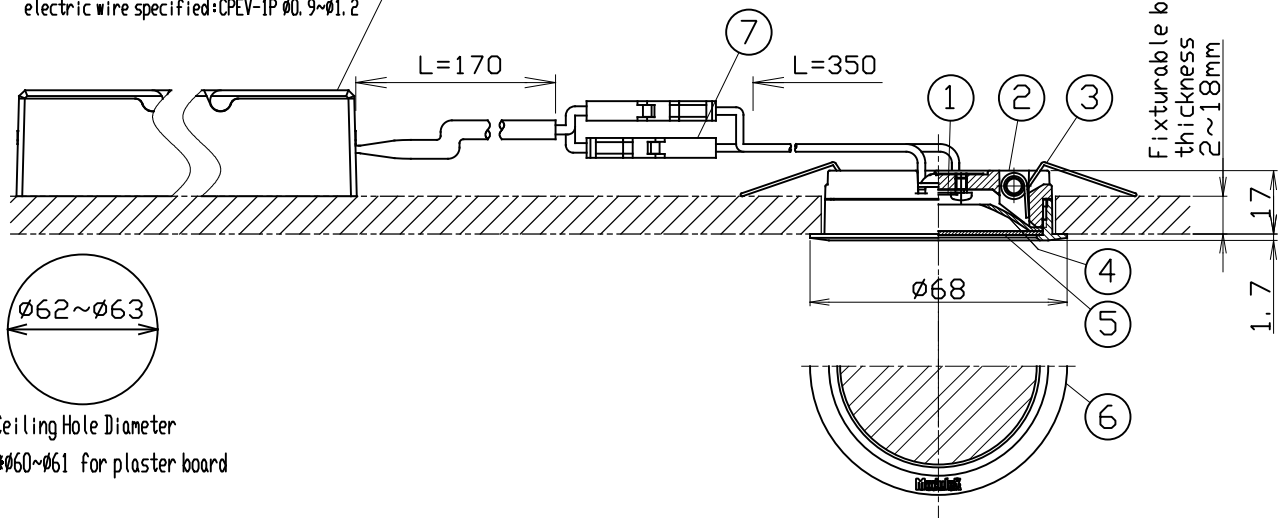

Ceiling Hole Diameter
#Ø60~Ø61 for plaster board

PARTS	MATERIAL	REMARK
1 LED Module		
2 Body	ADC	Acrylic Baking Finish
3 Unit Mounting Spring	Stainless Steel	
4 Passive Reflector	Polycarbonate	Vacuum metalizing
5 Filter	Polycarbonate	Mealizing
6 Frame	ADC	Vacuum metalizing
7 Safety Connector	Resin	
8 Dedicated Driver		0-10V control dimming system

ATTENTION

- Do not cover fixture with the heat insulator etc.
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the approved driver directly.
- Up to 3 fixtures can be used for the Dedicated driver (Refer to the installation manual for details of connection method.)
- Use within 0℃~35℃ ambient temperature range.
- Because there are variations in the LEDs, emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
- Do not cut off power wire. Use dedicated cable only for extension
- Do not touch the lens with bare hands.
- Peel off protecting sheets when in use.
- The height of inside the ceiling have to be 190mm or more to install the driver there.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only
- Keep distance of the fixtures and objects 0.1m or more.
- This fixture is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.

