


**Discontinued product**




**SPECIFICATION**

- Light Source LED Module (Mounted)
  - Cone White Cone(WC), Matte black Cone(MC)
  - Light Distribution F (load F)
  - Dimming method 0-10V
  - Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
  - Input Current 0.065A (Dedicated driver input voltage, 220V input)  
0.063A (Dedicated driver input voltage, 240V input)
  - Power Consumption 12.0W (Included dedicated driver, 220V input)  
12.2W (Included dedicated driver, 240V input)
- ※The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
  - Fixture Input Voltage 18.6V
  - Fixture Input Current 0.5A
  - Dimming signal input current 2mA
  - Weight 410g (Driver weight is included)
  - Safety wire included


**PRODUCT CODE**

- MSP-080F/WC·MC/FLF/F/10B27/Z2/3
- MSP-080F/WC·MC/FLF/F/10B30/Z2/3
- MSP-080F/WC·MC/FLF/F/10B35/Z2/3
- MSP-080F/WC·MC/FLF/F/10B40/Z2/3

[ mm ]

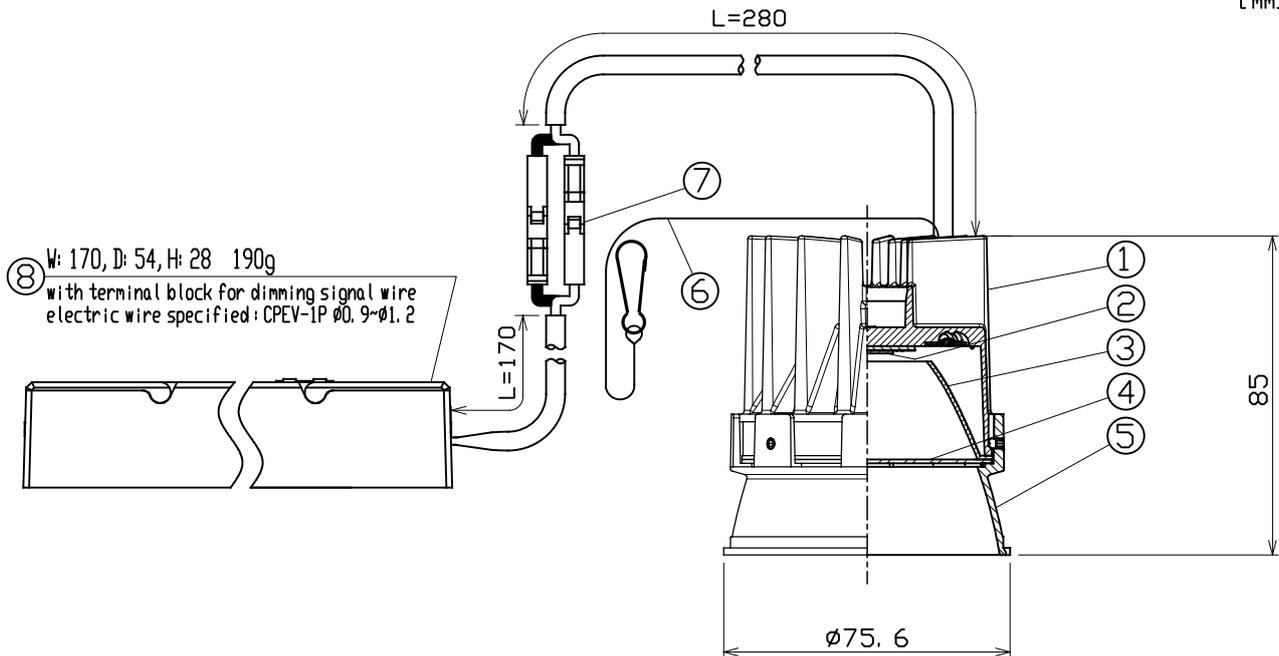

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Filter	Resin	
5	Cone	ADC	Plating Finish
6	Safety Wire	Stainless Steel	
7	Safety connector	Resin	
8	Dedicated Driver		0-10V control dimming system

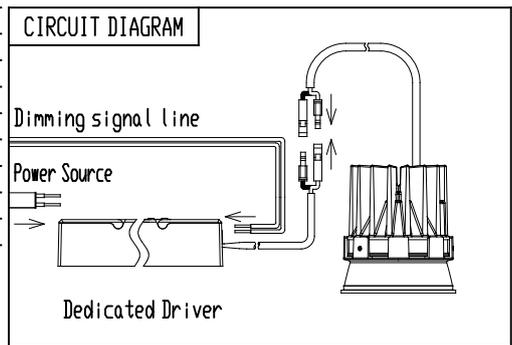

- ATTENTION**
- Use within 0℃~35℃ ambient temperature range.
  - Do not cover fixtures with the heat insulator etc.
  - Keep distance of the fixtures and objects 0.2m or more.
  - Danger! Do not remodel fixtures.
  - Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
  - Connect a safety wire to the fixture and mounting frame directly.
  - Emission color and brightness would be different even within the same model.
  - Please use constant current driver.
  - Connect input-side power wire to the approved driver directly.
  - Use 0-10V control dimming system (SR-2830AS-1-10) only.
  - Calculate the capacity in accordance with JIS C8155 standard.
  - There is no sending terminal block on the dedicated driver (primary side).
  - This instrument is for ceiling embedded only.  
Can not be installed on inclined ceilings, walls and so on.

