


Discontinued product




SPECIFICATION

- Light Source LED Module (Mounted)
- Light Distribution F=Flood
- Mounting Frame White(SWF)・Matt Black(SMF)
- Cone Color White Cone(WC)・Matt Black Cone(MC)
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 19.5V
- Fixture Input Current 0.7A MAX
- Weight 290g
- Attached Safety Wire

PRODUCT CODE

MSP-080F/WC/SWF/F/11B27/DL/3
MSP-080F/WC/SWF/F/11B30/DL/3
MSP-080F/WC/SWF/F/11B35/DL/3
MSP-080F/WC/SWF/F/11B40/DL/3
MSP-080F/MC/SWF・SMF/F/11B27/DL/3
MSP-080F/MC/SWF・SMF/F/11B30/DL/3
MSP-080F/MC/SWF・SMF/F/11B35/DL/3
MSP-080F/MC/SWF・SMF/F/11B40/DL/3

[mm]

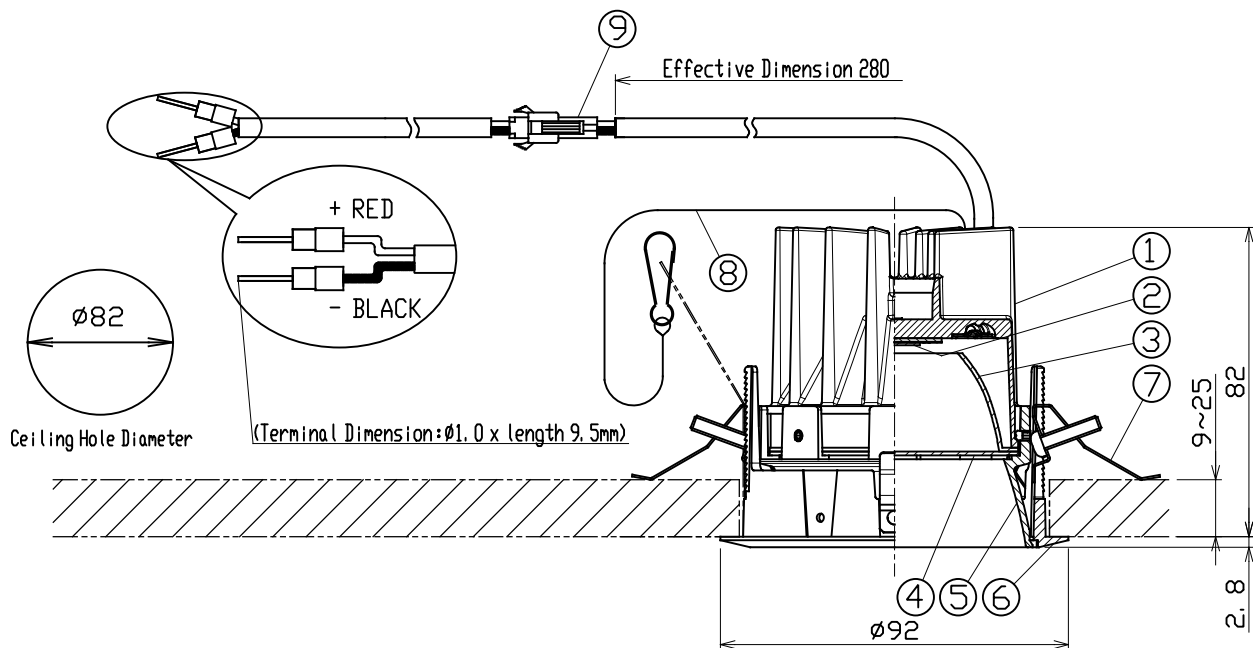

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module	_____	_____
3	Reflector	Aluminum	_____
4	Filter	Resin	_____
5	Cone	ADC	Acrylic Baking Finish
6	Mounting Frame	ADC	Acrylic Baking Finish
7	Unit Mounting Spring	Stainless Steel	_____
8	Safety Wire	Stainless Steel	_____
9	Safety Connector	Resin	_____

ATTENTION

- Use within 0℃~35℃ ambient temperature range.
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0.2m or more.
- Danger! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the 'class2' driver.
In that case, grounding is not required.