

SERIES


FUNCTION

CAT, No.

ModuleX 100

Wall Washer downlight

SX-B9451D/V2/CE



SPECIFICATION


- Light Source
- Frame
- Cone
- Dedicated Driver
- Fixture Input Voltage
- Fixture Input Current
- Weight
- Safety wire included

LED Module (Mounted) *Ra93 typ
 White(W), Matte black(M)
 White Cone(WC) , Matte Black Cone(MC)
 Natural Cone(NC)
 Constant current (50/60Hz shared)
 37.6V
 0.7A MAX
 760g

PRODUCT CODE

SX-B9451D/V2/CE/R27B/WC/W
 SX-B9451D/V2/CE/R27B/MC/W·M
 SX-B9451D/V2/CE/R27B/NC/W·M
 SX-B9451D/V2/CE/R30B/WC/W
 SX-B9451D/V2/CE/R30B/MC/W·M
 SX-B9451D/V2/CE/R30B/NC/W·M
 SX-B9451D/V2/CE/R35B/WC/W
 SX-B9451D/V2/CE/R35B/MC/W·M
 SX-B9451D/V2/CE/R35B/NC/W·M
 SX-B9451D/V2/CE/R40B/WC/W
 SX-B9451D/V2/CE/R40B/MC/W·M
 SX-B9451D/V2/CE/R40B/NC/W·M

[mm]

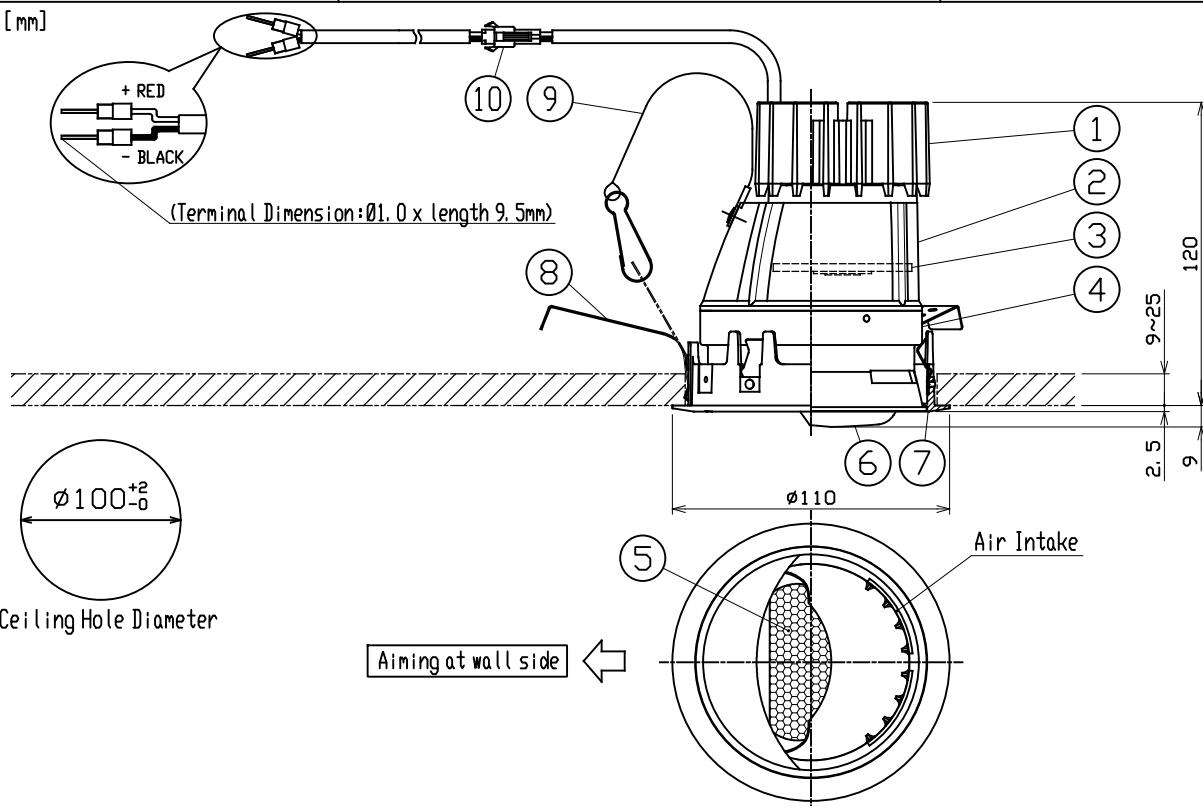

PARTS	MATERIAL	REMARK
1 Utility Socket	ADC	Acrylic Baking Finish
2 Body	ADC	Acrylic Baking Finish
3 LED Module	—	—
4 Cone	ADC	WC, MC:Acrylic Baking Finish NC :Plating Finish
5 Lens Filter	Hard Glass	Partial Shot Processing
6 Cone Cover	ADC	WC, MC:Acrylic Baking Finish NC :Plating Finish
7 Mounting Frame	ADC	Acrylic Baking Finish
8 Unit Mounting Spring	Stainless Steel	—
9 Safety Wire	Stainless Steel	—
10 Safety Connector	Resin	—

ATTENTION

- Use within 0°C~35°C ambient temperature range.
- Do not cover fixtures with the heat insulator etc.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please refer to the Installation Guide about the conditions for the installation of the lighting fixtures.
- Danger ! Do not remodel fixtures.
- Keep distance of the fixtures and objects 0.1m or more.
- Connect input-side power wire to the approved driver directly.
- Please use constant current driver.
- Please do not remove safety connector
- Please use the "class2" driver. In that case, grounding is not required.