


**Discontinued product**




**SPECIFICATION**

- Light Source LED Module (Mounted)
- Light Distribution F=Flood
- Mounting Frame White(PWF)・Matte Black (PMF)
- Cone Color White Cone(WC) Matte Black Cone(MC)
- Dedicated Driver Constant current ( 50/60Hz shared)
- Fixture Input Voltage 19. 5V
- Fixture Input Current 0. 7A MAX
- Weight 290g
- Attached safety wire

**PRODUCT CODE**

- MSP-080F/WC/PWF/F/11B27/DL/3
- MSP-080F/WC/PWF/F/11B30/DL/3
- MSP-080F/WC/PWF/F/11B35/DL/3
- MSP-080F/WC/PWF/F/11B40/DL/3
- MSP-080F/MC/PWF・PMF/F/11B27/DL/3
- MSP-080F/MC/PWF・PMF/F/11B30/DL/3
- MSP-080F/MC/PWF・PMF/F/11B35/DL/3
- MSP-080F/MC/PWF・PMF/F/11B40/DL/3

**IP45**

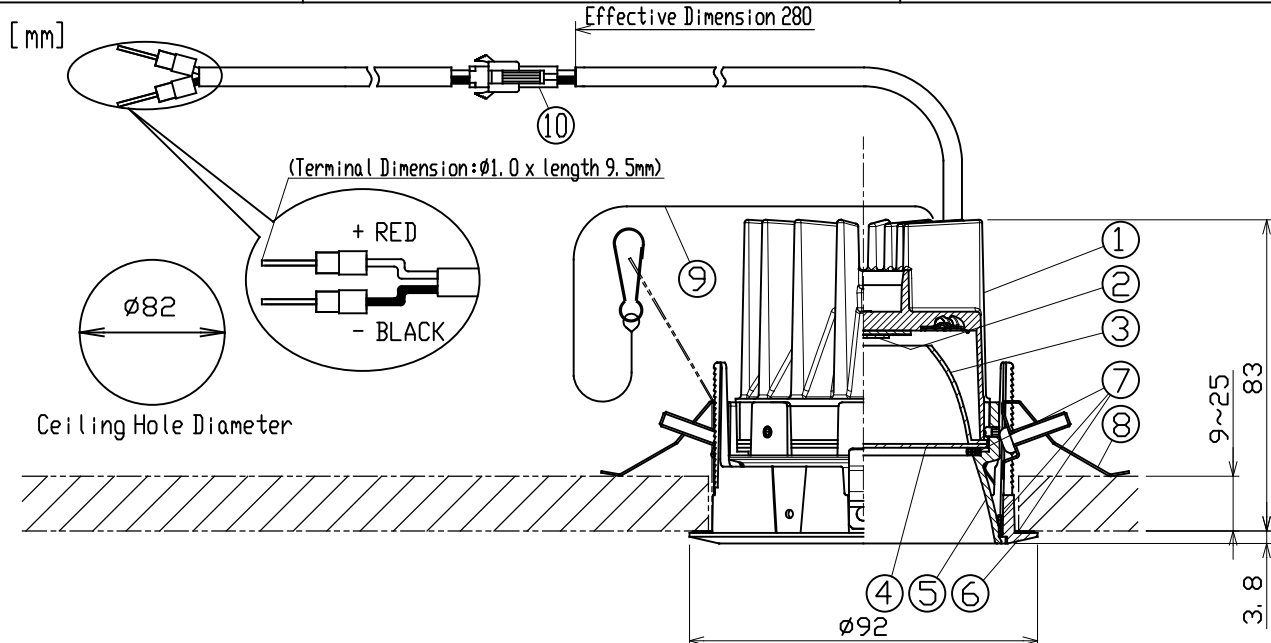

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Filter	Resin	
5	Cone	ADC	Acrylic Baking Finish
6	Mounting Frame	ADC	Acrylic Baking Finish
7	Packing	Rubber sponge	
8	Unit Mounting Spring	Stainless Steel	
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	

**ATTENTION**

- Use within 0℃~35℃ ambient temperature range
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0. 2m or more.
- Danger! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- In the state that I put in a Mounting Frame, please do not turn the instrument. There are cases where protection performance changes.
- The water-resistance capability with indoor and within the ceiling is different.
- There is no water resistance capability on the ceiling side. Do not install at places where water comes in within the ceiling.
- Do not use in high-humidity areas such as saunas.
- Do not install in any directions other than downward.
- If the irregularities of the ceiling material is large, please be flat.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.  
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the "class2" driver. In that case, grounding is not required.