

SERIES

ModuleX[®] 80


FUNCTION

Wall Washer downlight

CAT, No.

MSP-080W/SWF · SMF/20B/DL/3

Discontinued product




SPECIFICATION

- Light Source LED Module (Mounted)
- Mounting Frame White(SWF) · Matte Black (SMF)
- WALL Cone White Cone(WC)
- Dedicated Driver Matte Black Cone(MC)
- Fixture Input Voltage Constant current (50/60Hz shared)
- Fixture Input Current 36. 8V
- Weight 0. 7A MAX
- Attached Safety Wire 270g

PRODUCT CODE

- MSP-080W/WC/SWF/0/20B27/DL/3
- MSP-080W/WC/SWF/0/20B30/DL/3
- MSP-080W/WC/SWF/0/20B35/DL/3
- MSP-080W/WC/SWF/0/20B40/DL/3
- MSP-080W/MC/SWF · SMF/0/20B27/DL/3
- MSP-080W/MC/SWF · SMF/0/20B30/DL/3
- MSP-080W/MC/SWF · SMF/0/20B35/DL/3
- MSP-080W/MC/SWF · SMF/0/20B40/DL/3

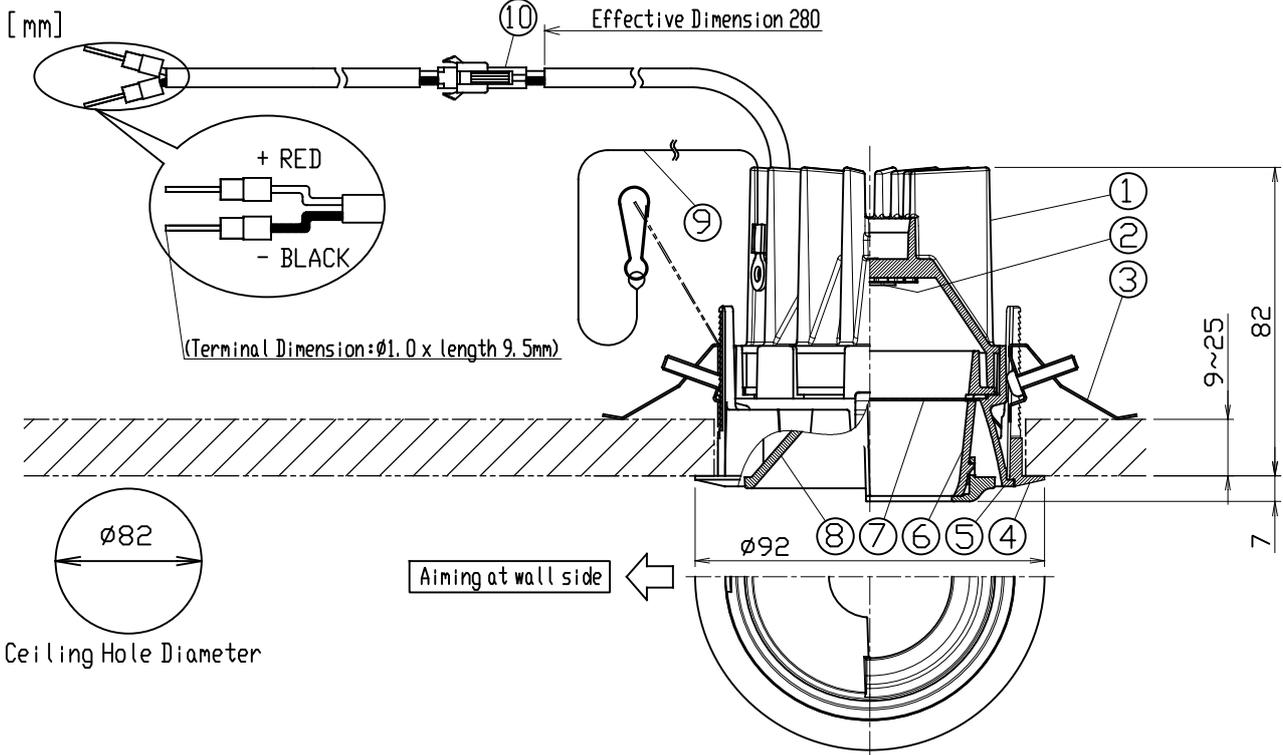

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Unit Mounting Spring	Stainless Steel	
4	Mounting Frame	ADC	Acrylic Baking Finish
5	Cone	ADC	Acrylic Baking Finish
6	Reflector	Resin	
7	Optical Filter	Resin	
8	WALL Cone	Resin	
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	

ATTENTION

- Use within 0℃~35℃ ambient temperature range
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0. 1m or more.
- Danger! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the Approved driver directly.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.
- It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the 'class2' driver. In that case, grounding is not required.

<p>ModuleX ModuleX Inc.</p>	<p>SPECIFICATION SHEET</p>	SCALE	CREATED DATE	REVISION DATE
		1/2	1/APR/2020	