

SERIES

ModuleX®80


FUNCTION

Wall Washer downlight

CAT, No.

MSP-080W/FLF/20B/DL/3

Discontinued product




SPECIFICATION

- Light Source LED Module (Mounted)
- Cone Color White Cone(WC) Matte Black Cone(MC)
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 36, 8V
- Fixture Input Current 0.7A (MAX)
- Weight 200g
- Attached Safety Wire

PRODUCT CODE

MSP-080W/WC/FLF/0/20B27/DL/3
MSP-080W/WC/FLF/0/20B30/DL/3
MSP-080W/WC/FLF/0/20B35/DL/3
MSP-080W/WC/FLF/0/20B40/DL/3
MSP-080W/MC/FLF/0/20B27/DL/3
MSP-080W/MC/FLF/0/20B30/DL/3
MSP-080W/MC/FLF/0/20B35/DL/3
MSP-080W/MC/FLF/0/20B40/DL/3

[mm]

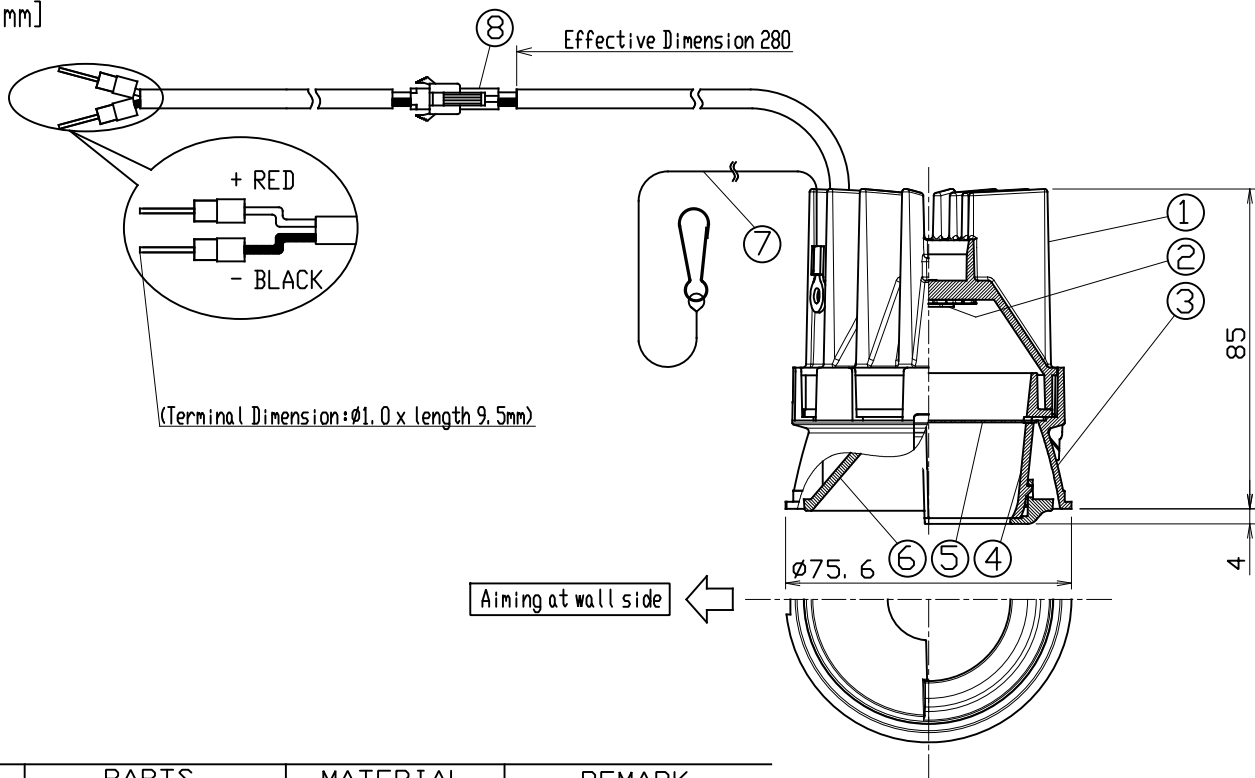

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Cone	ADC	Acrylic Baking Finish
4	Reflector	Aluminum	
5	Optical Filter	Resin	
6	WALL Cone	Resin	
7	Safety Wire	Stainless Steel	
8	Safety Connector	Resin	

ATTENTION

- Use within 0℃~35℃ ambient temperature range
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0.1m or more.
- Danger ! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Please use constant current driver.
- Connect input-side power wire to the Approved driver directly.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the 'class2' driver. In that case, grounding is not required.

ModuleX®
ModuleX Inc.

SPECIFICATION SHEET

SCALE

1 / 2

CREATED DATE

1/APR/2020

REVISION DATE