


Discontinued product




SPECIFICATION


- Light Source LED Module (Mounted)
- Light Distribution Medium (M)
- Mounting Frame White (SWF), Matte black (SMF)
- Cone White Cone (WC), Matte black Cone (MC), Chrome Cone (CC)
- Vertical aiming angle 30°
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6% (Dedicated driver input voltage)
- Input Current 0.200A (Dedicated driver input voltage, 220V input)
0.184A (Dedicated driver input voltage, 240V input)
- Power Consumption 39.6W (Included dedicated driver, 220V input)
39.8W (Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 37.8V
- Fixture Input Current 0.9A
- Dimming signal input current 2mA
- Weight 880g (Driver weight is included)
- Safety wire included

PRODUCT CODE

- MSP-100A/WC/SWF/M/30B27/Z2/3
- MSP-100A/WC/SWF/M/30B30/Z2/3
- MSP-100A/WC/SWF/M/30B35/Z2/3
- MSP-100A/WC/SWF/M/30B40/Z2/3
- MSP-100A/MC/SWF・SMF/M/30B27/Z2/3
- MSP-100A/MC/SWF・SMF/M/30B30/Z2/3
- MSP-100A/MC/SWF・SMF/M/30B35/Z2/3
- MSP-100A/MC/SWF・SMF/M/30B40/Z2/3
- MSP-100A/CC/SWF・SMF/M/30B27/Z2/3
- MSP-100A/CC/SWF・SMF/M/30B30/Z2/3
- MSP-100A/CC/SWF・SMF/M/30B35/Z2/3
- MSP-100A/CC/SWF・SMF/M/30B40/Z2/3





Ceiling Hole Diameter

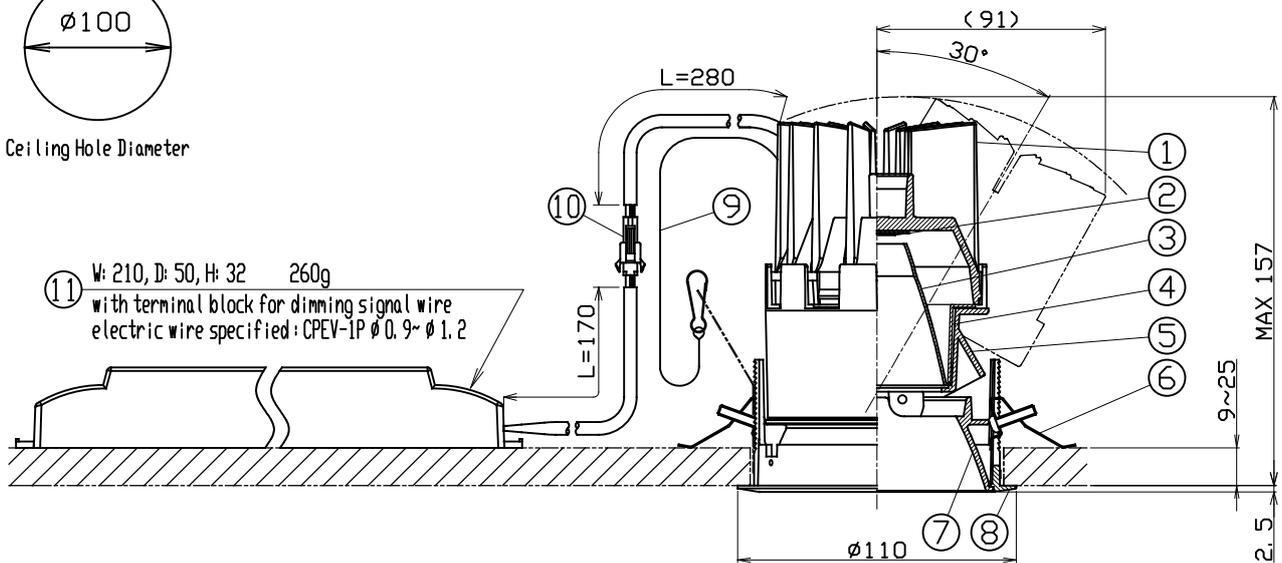

[mm]

⑪ W: 210, D: 50, H: 32 260g
with terminal block for dimming signal wire
electric wire specified: CPEV-1P φ 0.9~φ 1.2

PARTS	MATERIAL	REMARK
1 Body	ADC	Acrylic Baking Finish
2 LED Module		
3 Reflector	Aluminum	
4 Reflector fixing bracket	Aluminum	Material Origin Color
5 Hood	ADC	Acrylic Baking Finish
6 Unit Mounting Spring	Stainless Steel	
7 Mounting Frame	ADC	Acrylic Baking Finish
8 Cone	ADC	Acrylic Baking Finish (WC・MC) Plating Finish (CC)
9 Safety Wire	Stainless Steel	
10 Safety Connector	Resin	
11 Dedicated Driver		0-10V control dimming system

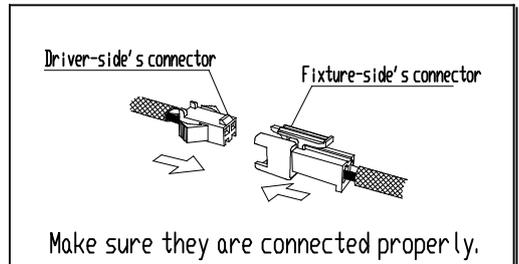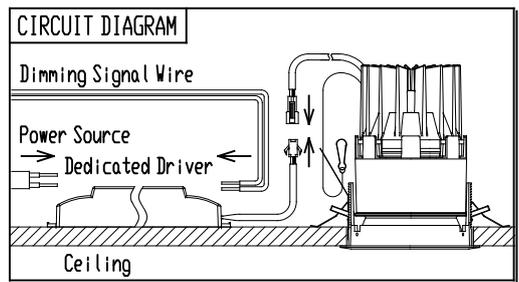

- ATTENTION**
- Emission color and brightness would be different even within the same model.
 - Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
 - Danger! Do not remodel fixtures.
 - Do not cover fixtures with the heat insulator etc.
 - Keep distance of the fixture and objects 0.2m or more.
 - Use within 0~35℃ ambient temperature range.
 - Connect a safety wire to the fixture and mounting frame directly.
 - Please use constant current driver.
 - There is no sending terminal block on the dedicated driver (primary side).
 - Connect input-side power wire to the dedicated driver directly.
 - Use 0-10V control dimming system (SR-2830AS-1-10V (Sold separately)) only
 - Calculate the capacity in accordance with JIS C8155 standard.
 - This fixture is ceiling installation only. It can not be mounted on an inclined ceiling or wall.