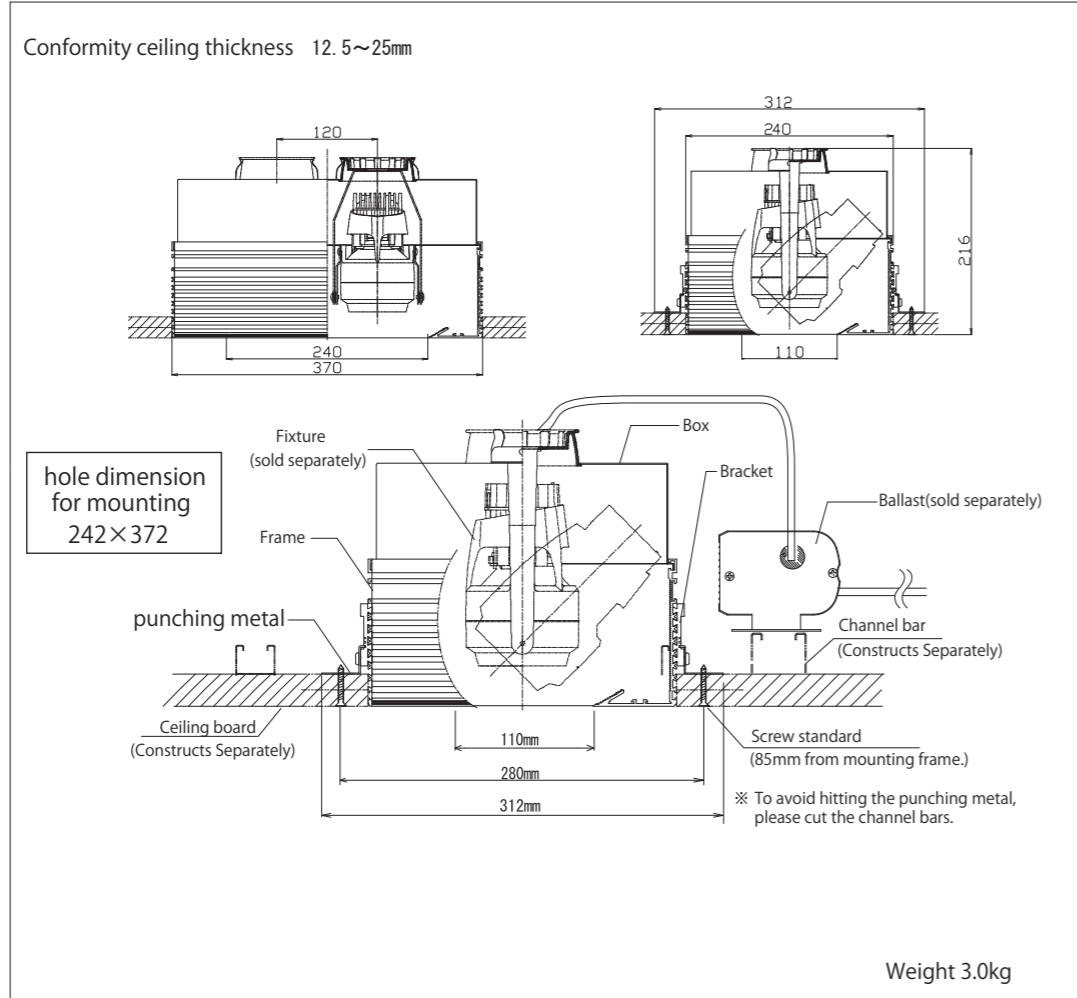


# SX-LF102

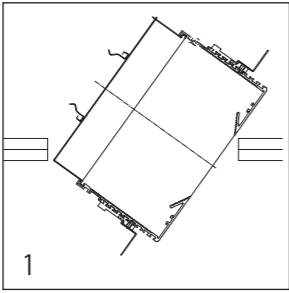
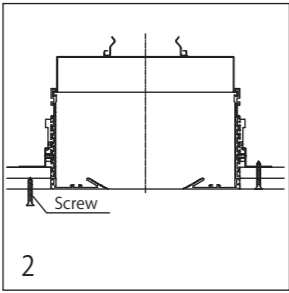

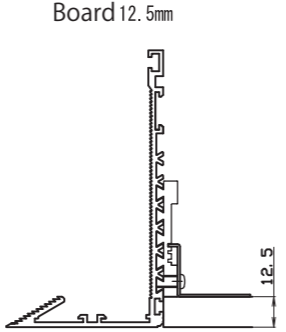
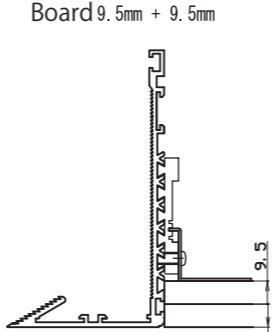
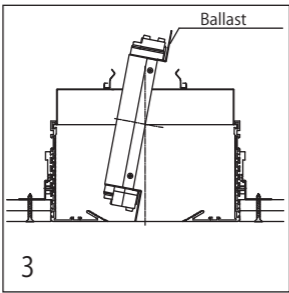
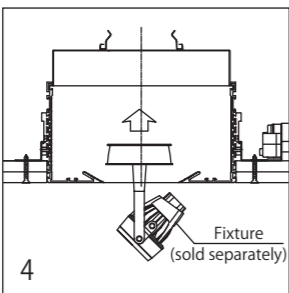
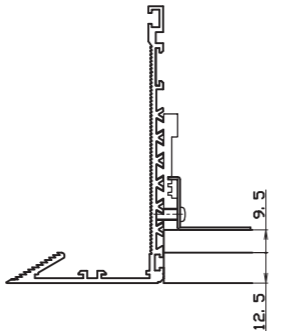
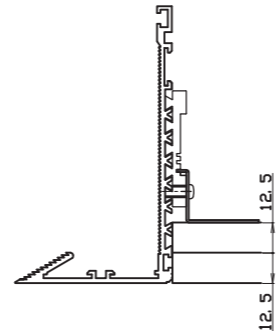



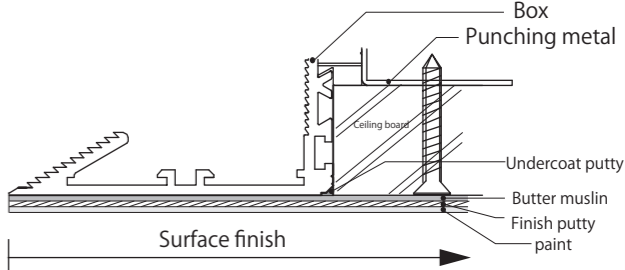
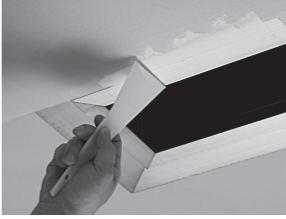


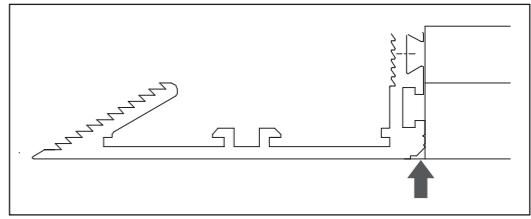
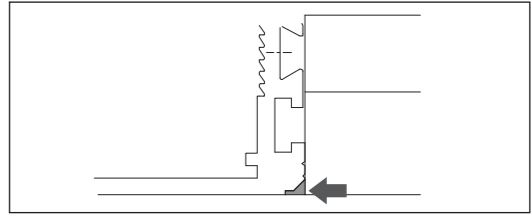
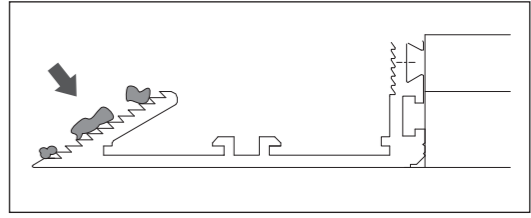
# ModuleX

To install the fixture safely 《 Read carefully and follow all the instructions in the guide 》

<p>⚠ Warning : Failure to install the fixture properly could result in personal injury.      ⚡ : Prohibited</p> <p>⚠ Caution : Failure to install the fixture properly could result in property damage.      ⚠ : Strict observance</p>	
Before installation	<p>⚠ Warning</p> <p>⚡</p> <p>The fixture is for indoor use only in general conditions. Can not be used following conditions (Causes of falling, electrocution and fire)</p> <ul style="list-style-type: none"> <li style="width: 33%;">● Inclined, uneven surface</li> <li style="width: 33%;">● Insulated inside of ceiling</li> <li style="width: 33%;">● Ambient temperature under 0°C and over 35°C</li> <li style="width: 33%;">● High humidity</li> <li style="width: 33%;">● Ceiling which can't hold the fixture weight</li> <li style="width: 33%;">● On the wall</li> <li style="width: 33%;">● Outside</li> <li style="width: 33%;">● Places affected by wind or air-conditioner machine</li> <li style="width: 33%;">● On the floor</li> <li style="width: 33%;">● Near fire</li> <li style="width: 33%;">● Vibrated or shocked areas</li> <li style="width: 33%;">● Dusty areas, corrosive gas outbreaks areas</li> <li style="width: 33%;">● Areas get direct sunlight</li> </ul> <p>Please contact if you are not able to judge whether installation environment is suitable to the places or not.</p>
	<p>⚠ Caution</p> <p>⚠</p> <p>Please follow the fixtures' indication or specification for the distance of irradiated area. (Causes of change in shape, change in color of irradiated objects)</p>
At lighting fixture installation	<p>⚠ Warning</p> <p>⚠</p> <p>Please follow the fixtures' instruction or this guide to install the fixture and lamp. (Causes of falling • electrification • fire)</p>
	<p>⚠</p> <p>Make sure to install all the parts of fixtures besides installation and mounting parts will not touch with any objects both inside and outside of ceiling such as lighting track, etc. (Causes of falling • electrification • fire)</p>
	<p>⚡</p> <p>Do not dismantle or remodel fixtures. (Cause of electrification • fire • falling • broken fixtures)</p>
	<p>⚠ Caution</p> <p>⚠</p> <p>Make sure the construction will not affect any fire prevention systems such as sprinkler by heat from the fixture. (Causes for improper operation)</p>

SX-LF102

Installation Details	Installation Diagram	Caution
<p>1 Installation Box</p> <p>1 Open the installation hole and put in the Box.</p>		
<p>2 Apply a screw to the punching metal on the ceiling and secure the box.</p> <p>⚠ Adjust the position of the punching metal by the thickness of the ceiling board.</p>		 <p>Board 12.5mm</p>  <p>Board 9.5mm + 9.5mm</p> 
<p>3 put in the Power supply.</p>		
<p>4 Install to the fixture.</p>		<p>Board 9.5mm + 12.5mm</p>  <p>Board 12.5mm + 12.5mm</p> 

Installation Details	Installation Diagram	Caution
<p>5 Ceiling finish</p> <p>5 Butter muslin is stuck .</p>		 <p>⚠ To Ceiling Constructors Please pay attention.</p>
<p>6 Finish the seam with putty.</p>		
<p>7 Paint.</p>		
<p>⚠ For ceiling construction, it becomes contractor's work, but be careful on the cautions of the construction.</p> <p>a Make sure to have the ceiling surface and the opening to become flush.</p> <p>b When constructing, make sure the putty is securely finished and there will be no crack.</p> <p>c Make sure there will be no ceiling paint on the opening of the box.</p>		 <p>a</p>  <p>b</p>  <p>c</p> 

(Contact)

**Havells Sylvania Europe Ltd.**

Longbow House, 14-20 Chiswell Street, London, EC1Y 4TW, U.K

Tel : +44-01273-616649

(Manufacturer)

**ModuleX Inc.**

#21 AraiBldg, 1-20-6 Ebisu-Minami Shibuya-ku, Tokyo

Tel : +81-3-5768-3131