


Discontinued product




SPECIFICATION

- Light Source LED Module (Mounted)
 - Cone White Cone(WC), Matte black Cone(MC)
 - Mounting Flange White(SWF), Matt black(SMF)
 - Light Distribution Medium(M), Flood(F)
 - Dimming method 0-10V
 - Input Voltage 220V±6%, 240V±6% (Dedicated driver input voltage)
 - Input current 0.200A (Dedicated driver input voltage, 220V input)
0.184A (Dedicated driver input voltage, 240V input)
 - Power Consumption 39.6W (Included dedicated driver, 200V input)
39.8W (Included dedicated driver, 242V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
 - Fixture Input voltage 37.8V
 - Fixture Input current 0.9A
 - Dimming signal input current 2mA
 - Weight 690g (Included dedicated driver)
 - Safety Wire is attached

PRODUCT CODE

- MSP-100F/WC/SWF/M・F/30B27/Z2/3
MSP-100F/WC/SWF/M・F/30B30/Z2/3
MSP-100F/WC/SWF/M・F/30B35/Z2/3
MSP-100F/WC/SWF/M・F/30B40/Z2/3
- MSP-100F/MC/SWF・SMF/M・F/30B27/Z2/3
MSP-100F/MC/SWF・SMF/M・F/30B30/Z2/3
MSP-100F/MC/SWF・SMF/M・F/30B35/Z2/3
MSP-100F/MC/SWF・SMF/M・F/30B40/Z2/3

[mm]




Ceiling Hole Diameter

⑩


W:210, D:50, H:32 260g

with terminal block for dimming signal wire
electric wire specified: CPEV-1P Ø0.9~Ø1.2

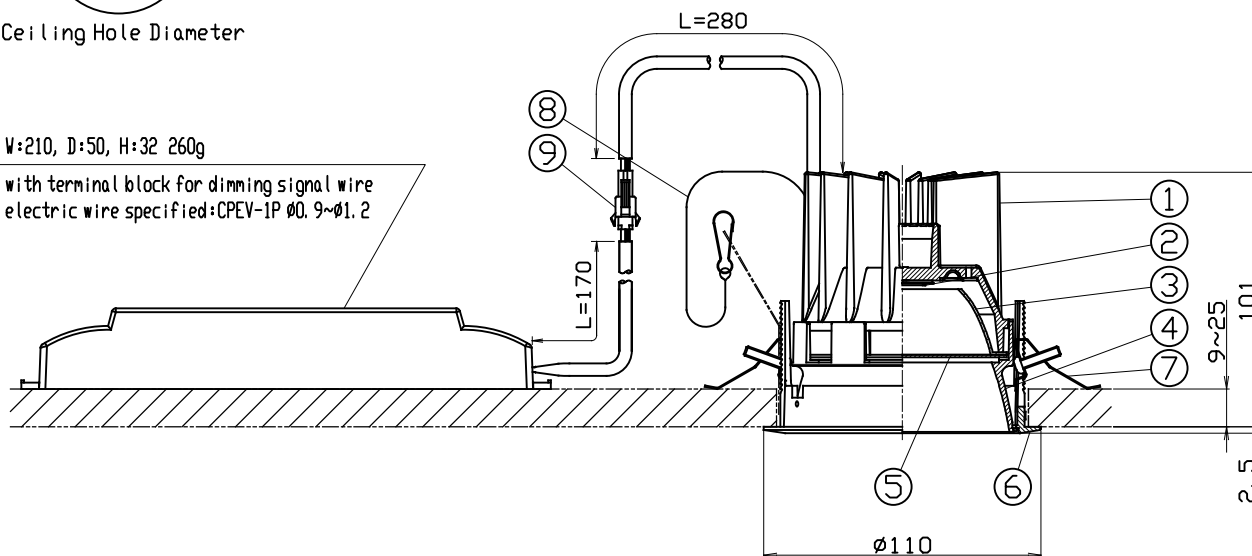

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Reflector	Aluminum	
4	Cone	ADC	Acrylic Baking Finish
5	Filter	Resin	
6	Mounting Frame	ADC	Acrylic Baking Finish
7	Unit Mounting Spring	Stainless Steel	
8	Safety Wire	Stainless Steel	
9	Safety Connector	Resin	
10	Dedicated Driver		0-10V control dimming system

CIRCUIT DIAGRAM

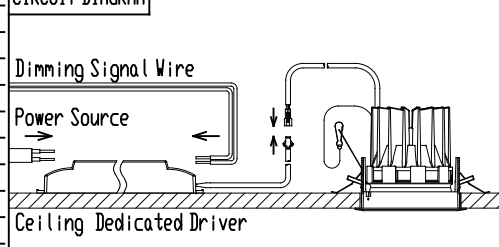

ATTENTION

- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Do not cover the fixture with a heat insulator etc.
- Keep distance of the fixture and objects 0.2m or more.
- Use within 0℃~35℃ ambient temperature range.
- Be sure to connect a safety wire to the fixture and mounting frame.
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only.
- The height of inside the ceiling have to be 150mm or more to install the driver there.
- Calculate the capacity in accordance with JIS C8155 standard.
- The fixture is ceiling mounting exclusive use. Do not mount inclined ceilings or walls.

