

MMP-060KH/10B/Z2/3


	[mm]	Mounting screw pitch 	Light Source LED module Dedicated Driver Constant Current Driver Input Voltage 220V/240V±6% 50Hz/60Hz Input Current 0.035A/0.033A Power Consumption 7.0W/7.2W Dimming method 0-10V
	Wall / ceiling mounted		Fixture Input Voltage 9.6V Input Current 0.5A Dimmer SR-2830AS-1-10V
	Weight	1.6kg	
	Rotate degrees	90°	

ModuleX






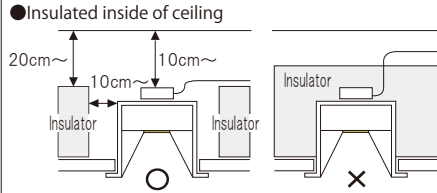


Installation Guide

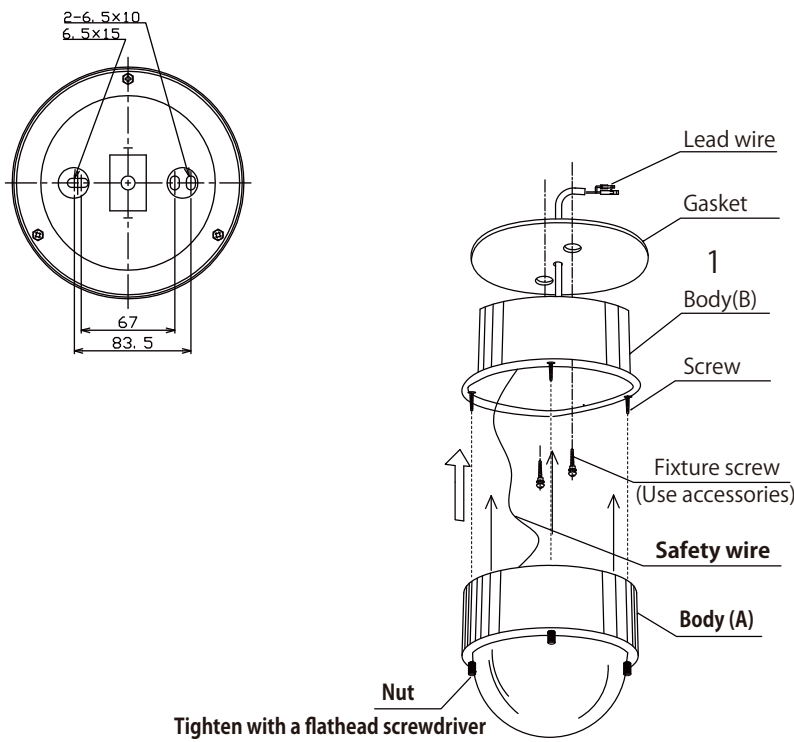



Lighting Fixture

MMP-060KH/10B/Z2/3

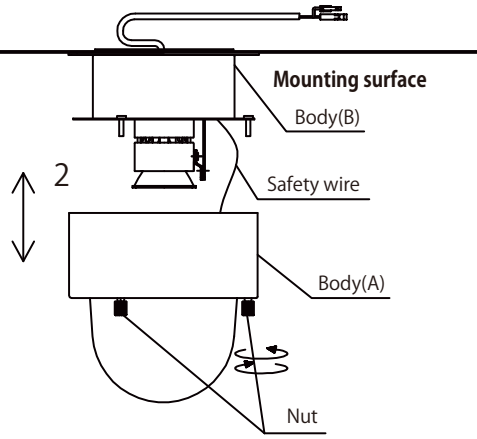To install the fixture safely 《 Read carefully and follow all the instructions in the guide 》				
⚠ Warning : Failure to install the fixture properly could result in persona l injury.		🚫 : Prohibited		
⚠ Caution : Failure to install the fixture properly could result in property damage.		❗ : Strict observance		
Before installation	⚠ Warning	🚫	The fixture is for indoor use only in general conditions. Can not be used following conditions (Causes of falling, electrocution and fire) ●uneven surface ●Insulated inside of ceiling ●Ambient temperature under 0℃ and over 70℃ ●High humidity ●Ceiling which can't hold the fixture weight ●Insulated inside of ceiling ●Outside ●Places affected by wind or air-conditioner machine ●On the floor ●Vibrated or shocked areas ●Near fire ●Dusty areas, corrosive gas outbreaks areas ●Areas get direct sunlight Please contact if you are not able to judge whether installation environment is suitable to the places or not.	
			❗ Even when using it indoors, do not use it in a place where there is a sulfur component around the equipment. (Sulfur components may also be contained in some foods, chemicals, papers, rubber products, and car exhaust gas.)	
	⚠ Caution	❗ Please follow the fixtures' indication or specification for the distance of irradiated area. (Causes of change in shape, change in color of irradiated objects)		
		❗ Carefully check the size of the lighting fixtures and secure sufficient space in the ceiling.		
For electric wiring	⚠ Warning	❗ Only qualified person may work on electric wiring and equipment.(Cause of accidents)		
		❗ Please use a compatible power supply and compatible driver. (Cause of non-lighting / fire)		
		❗ Be sure power supply voltage is within ±6% mentioned in rating plate or the guide. (Causes of short life of lamps•electrification•fire)		
		❗ Be sure all the wires and codes are not damaged. (Causes of falling•damage)		
		🚫 Do not perform live-line construction. There is a risk of electric shock or product failure.		
		🚫 Do not install other electronic devices (devices that use a motor such as a ventilation fan) in the same circuit as it may lead to equipment failure.		
At lighting fixture installation	⚠ Warning	❗ Please follow the fixtures' instruction or this guide to installthe fixture and lamp. (Causes of falling•electrification•fire)		
		❗ Models equipped with a safety wire (fall prevention wire) as standard equipment to prevent falling due to an earthquake, etc. Be sure to install it securely according to this manual.		
		❗ Be sure to turn off the power when installing the fixture or lamp. (Cause of electric shock)		
		🚫 Do not touch the fixture when switch is on or just turn off the switch because of high temperature.		
		🚫 Do not put or cover the fixture by any cloths, papers, or insulators.(Causes of not lighting•fire)		
		🚫 Do not put metal or burning objects in the gaps of the equipment. (Causes of electric shock, fire, and equipment failure)		
		❗ Make sure that the outer shell of the main body other than the equipment mounting part does not come into contact with equipment such as construction materials and ducts inside and outside the ceiling. (Causes of falling, electric shock, and fire)		
		🚫 Do not dismount or remodel fixtures. (Cause of electrification • fire • falling • broken fixtures)		
		🚫 Do not operate with wet hands.		
		🚫 Do not grab and lift wires or cables that are not the product itself. It may be damaged.		
		❗ If you smell smoke, see smoke, or find anything unusual, please turn the switch off and ask construction companies to repair. (Cause of electrification•fire)		
	⚠ Caution	❗ Use protective equipment such as clean gloves when installing and removing equipment. (Cause of injury)		
		❗ Install so that the heat of the equipment does not affect the fire protection equipment such as sprinklers. (Cause of malfunction)		
		❗ Please note that noise may enter the device if it is lit near a communication device such as a radio.		

MMP-060KH/10B/Z2/3

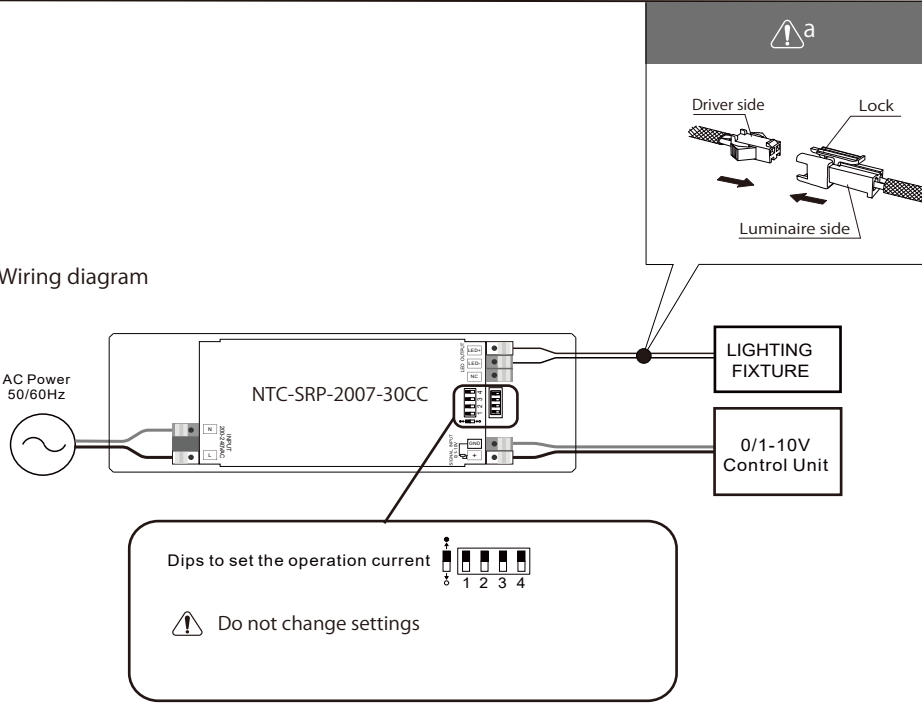Installation Details		Installation Diagram • Caution	
1	<div>Installation</div> <div>Match the center of the gasket with the body (B) and attach it to the mounting surface with the attached screws</div>	<div></div>	
	Ensure sufficient strength of the mounting part		
	Be sure to use the attached fixture screws Do not remove the washer set on the screw (Risk of fall)		
	Tighten the screw straight to the mounting surface Confirm that the main unit is firmly attached		
	Seal the gap between the mounting surface and the gasket (Risk of insulation failure)		
2	<div>Installation of Body (A)</div> <div>Secure the Body (A) to the Body (B) with three Nuts.</div>	<div></div>	
	Tighten the nut with a flathead screwdriver		
	The Body (A) and the Body (B) are connected by a Safety wire Do not remove wire for safety		

Installation Details		Installation Diagram • Caution	
1	Connect the bundled dedicated Driver to the connector of Luminaire	<div></div>	
2	Please connect according to the description of the power supply.		
3	Install a dedicated driver on the ceiling		
	Be sure to turn off the power before working		
	Connect the connector securely. If you remove it pull while holding the lock. Do not connect or disconnect the connector while the power is on. (Cause of trouble)		
	Do not touch the metal terminals on the inside of the connector directly with your hands.		