

MMP-100D/3H/30B/Z2/3

V:210, D:50, H:32 260g
with terminal block for dimming signal wire
electric wire specified: DPEV-IP 0U 9-0L 2

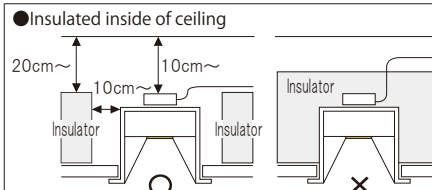
For tilt lock
Set screw(M3)

Ceiling cut out		Light Source LED module	
	Ceiling thickness 	Dedicated Driver	Constant Current
		Driver	
Weight 0.95kg	Rotate degrees 	Input Voltage	220V/240V±6% 50Hz/60Hz
		Input Current	0.200A/0.185A
		Power Consumption	39.7W/39.9W
		Dimming method	0-10V
		Fixture	
		Input Voltage	37.9V
		Input Current	0.9A
		Dimmer	SR-2830AS-1-10
		OPTION	
		Full diffuser lens filter	MLA-100/DF01
		Semi diffuser lens filter	MLA-100/DS02
		Full spread lens filter	MLA-100/SF01
		Semi spread lens filter	MLA-100/SS01
		Edge control filter	MLA-100/EC02
		Sharpener lens filter	MLA-100/SH01
		(available only for narrow distribution)	

ModuleX

Installation Guide

MMP-100D/3H/30B/Z2/3

To install the fixture safely 《 Read carefully and follow all the instructions in the guide 》			
⚠ Warning : Failure to install the fixture properly could result in personal injury.		🚫 : Prohibited	
⚠ Caution : Failure to install the fixture properly could result in property damage.		❗ : Strict observance	
Before installation	⚠ Warning	🚫	The fixture is for indoor use only in general conditions.This fixture can only be installed on a horizontal ceiling. Can not be used following conditions (Causes of falling, electrocution and fire) ●On the wall ●Plases affected by wind or air-conditioner mashine ●On the floor ●Inclined, uneven surface ●Outside ●Ambient temperature under 0℃ and over 35℃ ●Near fire ●Ceiling which can't hold the fixture weight ●High humidity ●Dusty areas, corrosive gas outbreaks areas ●Areas get direct sunlight ●Vibrated or shocked areas Please contact if you are not able to judge whether installation environment is suitable to the places or not.
			
	⚠ Caution	❗	Even when using it indoors, do not use it in a place where there is a sulfur component around the equipment. (Sulfur components may also be contained in some foods, chemicals, papers, rubber products, and car exhaust gas.)
			Please follow the fixtures' indication or specification for the distance of irradiated area. (Causes of change in shape, change in color of irradiated objects)
Carefully check the size of the lighting fixtures and secure sufficient space in the ceiling.			
For electric wiring	⚠ Warning	❗	Only qualified person may work on electric wiring and equipment.(Cause of accidents)
			Please use a compatible power supply and compatible driver. (Cause of non-lighting / fire)
			Be sure power supply voltage is within ±6% mentioned in rating plate or the guide. (Causes of short life of lamps•electrification•fire)
			Be sure all the wires and codes are not damaged. (Causes of falling•damage)
			🚫 Do not perform live-line construction. There is a risk of electric shock or product failure.
			🚫 Do not install other electronic devices (devices that use a motor such as a ventilation fan) in the same circuit as it may lead to equipment failure.
At lighting fixture installation	⚠ Warning	❗	Please follow the fixtures' instruction or this guide to installthe fixture and lamp. (Causes of falling•electrification•fire)
			Models equipped with a safety wire (fall prevention wire) as standard equipment to prevent falling due to an earthquake, etc. Be sure to install it securely according to this manual.
			Be sure to turn off the power when installing the fixture or lamp. (Cause of electric shock)
			🚫 Do not touch the fixture when switch is on or just turn off the switch because of high temperature.
			🚫 Do not put or cover the fixture by any cloths, papers, or insulators.(Causes of not lighting•fire)
			🚫 Do not put metal or burning objects in the gaps of the equipment. (Causes of electric shock, fire, and equipment failure)
			❗ Make sure that the outer shell of the main body other than the equipment mounting part does not come into contact with equipment such as construction materials and ducts inside and outside the ceiling. (Causes of falling, electric shock, and fire)
			🚫 Do not dismount or remodel fixtures. (Cause of electrification • fire • falling • broken fixtures)
			🚫 Do not operate with wet hands.
			🚫 Do not grab and lift wires or cables that are not the product itself. It may be damaged.
	⚠ Caution	❗	If you smell smoke, see smoke, or find anything unusual, please turn the switch off and ask construction companies to repair. (Cause of electrification•fire)
			Use protective equipment such as clean gloves when installing and removing equipment. (Cause of injury)
			Install so that the heat of the equipment does not affect the fire protection equipment such as sprinklers. (Cause of malfunction)
			Please note that noise may enter the device if it is lit near a communication device such as a radio.

MMP-100D/3H/30B/Z2/3

Installation Details		Installation Diagram • Caution	
<div><div>1</div><div>Install the mounting equipment for ceiling cut out</div><div><div>1</div><div>Cut out a hole and install the mounting frame.</div><div>2</div><div>Slide the metal fittings from upper side.</div><div>3</div><div>Use a screw driver and tighten the metal fittings.</div></div></div>	<div><div>1</div><div>Ceiling cut out</div><div><div><div>Ø100</div></div></div><div><div>Mounting frame</div><div>2</div><div>3</div><div>Metal fitting</div><div>Ceiling</div></div></div>	<div><div><div>⚠a</div><div><div>Push tight</div></div></div><div><div>⚠b</div><div><div>Standard to screw torque 1.0~2.0N・m</div></div></div></div>	
		<div><div>⚠a</div><div>On step 2, please fix the metal fitting firmly with your fingers. If not, it may cause falling of fixtures</div></div>	
		<div><div>⚠b</div><div>Make sure to tighten the metal fittings securely with a screwdriver. (torque 1.0 ~2.0 N・m) If it is loose, it may cause falling of the fixture</div></div>	
		<div><div>⚠</div><div>Make sure to have the height at least 150mm above the ceiling to install the driver.</div></div>	
<div><div>Optional parts installation</div><div><div>1</div><div>Turn around the hood.</div><div>2</div><div>Pull out the body from the hood.</div><div>3</div><div>Turn around the option holder, and put out .</div><div>4</div><div>Put a filter in hood.</div><div>5</div><div>Turn around the option holder, and put in.</div></div></div>	<div><div><div>Body</div><div>1</div><div>Hood</div><div>2</div></div><div><div>OPTION HOLDER</div><div>3</div><div>FILTER</div></div></div>	<div><div>⚠c</div><div><div>UP to 2FILTERS</div><div>OPTION HOLDER</div><div><div>Sharpner lens</div><div>×</div><div>×</div></div></div></div>	
		<div><div>⚠d</div><div><div>Match the mark.</div><div>Slide the hood.</div></div></div>	
		<div><div>⚠</div><div>Please attention that the sharpener lens is counted two pieces of filter lenses.</div></div>	
		<div><div>⚠c</div><div>Don't put in the filters than the rule number of pieces. Causes of falling and damage.</div></div>	
		<div><div>⚠d</div><div>Match the mark. Then,push the hood and slide it,in order to lock the body. (to prevent from falling)</div></div>	

Installation Details		Installation Diagram • Caution	
<div><div>1</div><div>Connect the bundled dedicated Driver to the connector of Luminaire</div><div>2</div><div>Please connect according to the description of the power supply.</div><div>3</div><div>Install a dedicated driver on the ceiling</div></div>	<div><div>Wiring diagram</div><div><div>AC Power 50/60Hz</div><div>NTC-SRP-2007-50CC</div><div>LIGHTING FIXTURE</div><div>0/1-10V Control Unit</div><div><div>Dips to set the operation current</div><div>⚠ Do not change settings</div></div></div></div>	<div><div><div>⚠e</div><div><div>Driver side</div><div>Lock</div><div>Luminaire side</div></div></div></div>	
		<div><div>⚠</div><div>Be sure to turn off the power before working</div></div>	
		<div><div>⚠e</div><div>Connect the connector securely. If you remove it pull while holding the lock. Do not connect or disconnect the connector while the power is on. (Cause of trouble)</div></div>	
		<div><div>⚠</div><div>Do not touch the metal terminals on the inside of the connector directly with your hands.</div></div>	
<div><div>Installation to ceiling</div><div><div>1</div><div>Install the safety wire to the mounting frame.</div><div>2</div><div>Install the fixture to the mounting frame.</div></div></div>	<div><div><div>Safety wire</div><div>1</div><div>Ceiling</div><div>2</div><div>Mounting frame</div><div>Body</div></div></div>	<div><div><div>⚠f</div><div><div>mounting frame</div><div>Safety wire</div></div></div></div>	
		<div><div>⚠g</div><div><div>Mounting frame</div><div>Inside</div><div>Clean gloves</div></div></div>	
		<div><div>⚠f</div><div>Make sure to install the safety wire to the mounting frame securely.</div></div>	
		<div><div>⚠g</div><div>Use clean soft cloth to clean up and maintain inner side of the body.</div></div>	
		<div><div>⚠</div><div>The description of a power supply.</div></div>	
		<div><div>⚠</div><div>Make sure the fixture will not touch any objects in ceiling.</div></div>	