
Installation Guide | Lighting Fixture

Tracklight

MMP-130S/3H/1N/40B/Z2/3

FOR USE WITH NORDIC ALUMINIUM INC, Series XTSC 6, TRACK SYSTEM ONLY. NORDIC ALUMINIUM lighting track is sold separately.

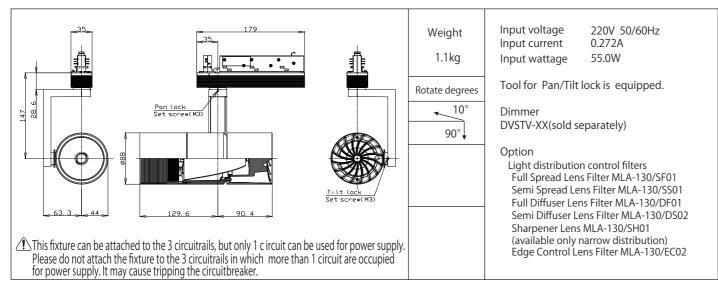

Marning:	Eailuro to i	actall +	the fixture properly could result in personal injury.		
			and an analysis of the second		
Caution:	Tallure to II	istaii t			
Before installation	1 Warning		The fixture is for indoor use only in general conditions. This fixture can only be installed on a horizontal ceiling. Can not be used following conditions (Causes of falling, electrocution and fire)		
		0	●Inclined, uneven surface ●Ambient temperature under 0°C and over 35°C		
			●High humidity ●Ceiling which can't hold the fixture weight		
			Outside On the wall		
			On the floor Places affected by wind or air-conditioner machine		
			●Vibrated or shocked areas ●Near fire		
			 Areas get direct sunlight Dusty areas, corrosive gas outbreaks areas 		
			Please contact if you are not able to judge whether installation environment is suitable to the places or not.		
	Caution	0	Please follow the fixtures' indication or specification for the distance of irradiated area. (Causes of change in shape, change in color of irradiated objects)		
For electric wiring	⚠Warning	0	Only qualified person may work on electric wiring and equipment. (Cause of accidents)		
		0	Use alternating current. Please follow rating plate of fixtures for power supply frequency. (Cause of electrification • fire) (50Hz • 60 Hz common use for ballasts and incandescent lamp fixtures)		
		0	Be sure power supply voltage is within $\pm 6\%$ mentioned in rating plate or the guide. (Causes of short life of lamps \cdot electrification \cdot fire		
		0	Be sure all the wires and codes are not damaged. (Causes of falling • damage)		
At lighting fixture installation	⚠ Warning	0	Please follow the fixtures' instruction or this guide to install the fixture and lamp. (Causes of falling • electrification • fire		
		0	Switch off the power when installing the lamp. (Causes of electrification)		
		0	Do not touch the fixture when switch is on or just turn off the switch because of high temperature.		
		0	Do not put or cover the fixture by any cloths, papers, or insulators.(Causes of not lighting • fire)		
		0	Do not place any metallic or flammable objects. (Cause of electrification • fire • broken fixture)		
		0	Make sure to install all the parts of fixtures besides installation and mounting parts will not touch with any objects both inside and outside of ceiling such as lighting track, etc. (Causes of falling • electrification • fire)		
		0	Do not dismount or remodel fixtures. (Cause of electrification • fire • falling • broken fixtures)		
		0	Do not operate with wet hands.		
		0	If you smell smoke, see smoke, or find anything unusual, please turn the switch off and ask construction companies to repair. (Cause of electrification • fire)		
	! Caution	0	Make sure the construction will not affect any fire prevention systems such as sprinkler by heat from the fixture. (Causes for improper operation)		


ModuleX

Installation Guide Lighting Fixture

Tracklight To install ModuleX safety

MMP-130S/3H/1N/40B/Z2/3

	Installation Details	Installation Diagram	Caution
1 2 3	Attaching luminaire to track Lower the cover of the power supply box Turn the lever to the left (turn off the power) Insert luminaire into track	cover	FOR USE WITH NORDIC ALUMINIUM INC, Series XTSC 6, TRACK SYSTEM ONLY. Lighting track is sold separately. This fixture can be attached to the 3 circuitrails, but only 1 circuit can be used for power supply. Please do not attach the fixture to the 3 circuitrails in which more than 1 circuit are occupied for power supply. It may cause tripping the circuitbreaker.
	Insert the luminaire surely into the track. There is a danger of falling if there is incompleteness.	lever 2	Connect with only N and L1 recommended. L1 L2 L2 X L3 L3 X
4	Turn the lever to the right (turn on the power)		
	Turn lever securely to the "ON" position. Failure to do so may cause a fall or fire.	lever	The terminals are connected internally as shown in the right circuit diagram. L1 DA(+) DA(-) N L3
5	Raise the cover of the power supply box	lighting track	Lever position indication
	If you can not raise the cover, there is a possibility that the luminaire is not securely fixed. Please try installing again.		⚠e
ſу́e	Do not install on walls and floor.		×wall ×floor
1	Adjustment of irradiation direction Grasp the fixture and adjust the irradiation direction	Range of movement	
	Do not forcibly move beyond the movable range Please adjust the fixture after turning off the power and cooling the fixture	10° 90° 380°	

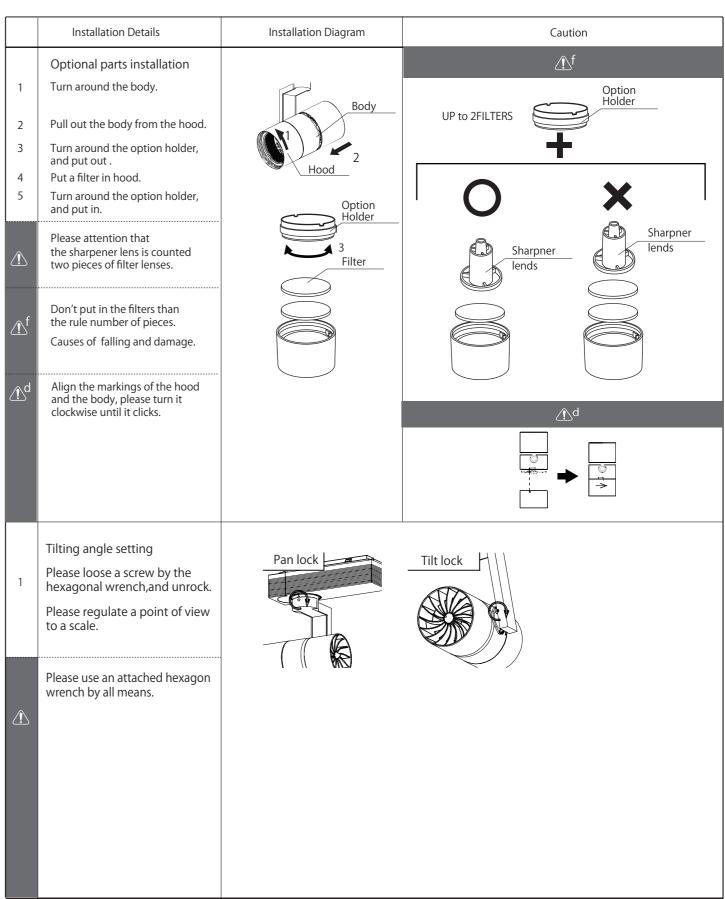

(Contact)

Concord Lighting

5/F, Longbow House,14-20 Chiswell Street, London, EC1Y 4TW, UK Tel:+44-01273-616649

(Manufacturer)

ModuleX Inc.

#21 AraiBldg, 1-20-6 Ebisu-Minami Shibuya-ku, Tokyo Tel: +81-3-5768-3131