


Discontinued product




SPECIFICATION

- Light Source LED Module (Mounted)
 - Cone White Cone(WC), Matte black Cone(MC)
 - Light Distribution Medium(M), Flood(F)
 - Dimming method 0-10V
 - Input Voltage 220V±6%, 240V±6% (Dedicated driver input voltage)
 - Input current 0.200A (Dedicated driver input voltage, 220V input)
0.184A (Dedicated driver input voltage, 240V input)
 - Power Consumption 39.6W (Included dedicated driver, 200V input)
39.8W (Included dedicated driver, 242V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
 - Fixture Input voltage 37.8V
 - Fixture Input current 0.9A
 - Dimming signal input current 2mA
 - Weight 640g (Included dedicated driver)
 - Safety Wire is attached

PRODUCT CODE


MSP-100F/WC・MC/FLF/M・F/30B27/Z2/3
MSP-100F/WC・MC/FLF/M・F/30B30/Z2/3
MSP-100F/WC・MC/FLF/M・F/30B35/Z2/3
MSP-100F/WC・MC/FLF/M・F/30B40/Z2/3

[mm]

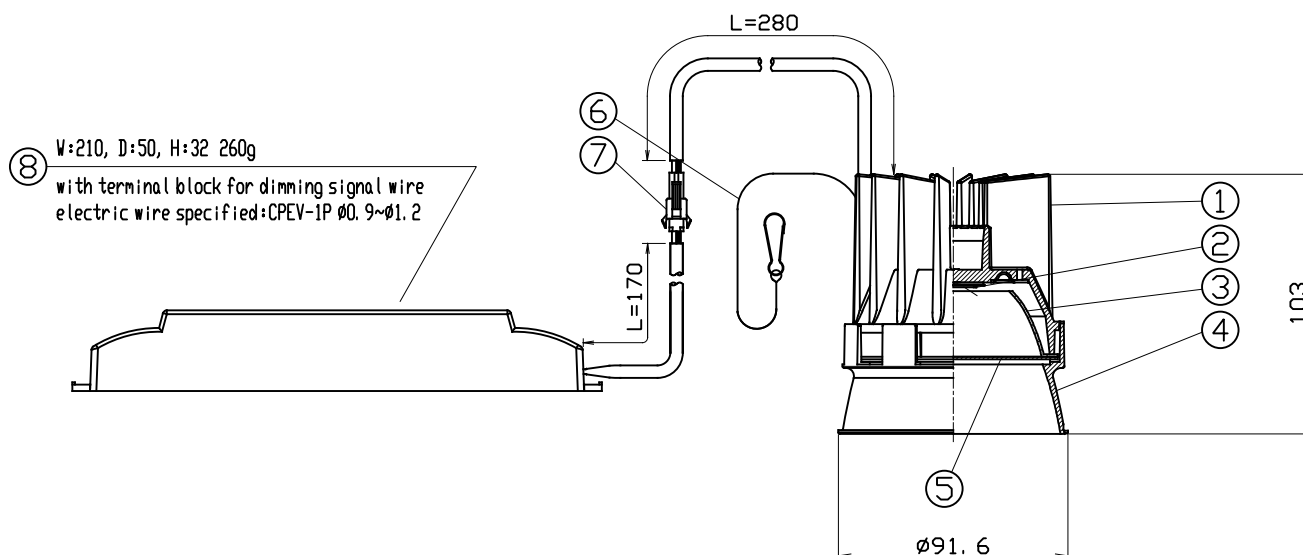

| | PARTS | MATERIAL | REMARK |
|---|------------------|-----------------|------------------------------|
| 1 | Body | ADC | Acrylic Baking Finish |
| 2 | LED Module | | |
| 3 | Reflector | Aluminum | |
| 4 | Cone | ADC | Acrylic Baking Finish |
| 5 | Filter | Resin | |
| 6 | Safety Wire | Stainless Steel | |
| 7 | Safety Connector | Resin | |
| 8 | Dedicated Driver | | 0-10V control dimming system |

CIRCUIT DIAGRAM

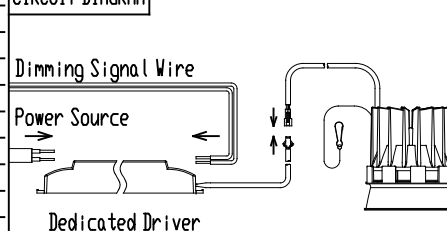

ATTENTION

- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Do not cover the fixture with a heat insulator etc.
- Keep distance of the fixture and objects 0.2m or more.
- Use within 0~35℃ ambient temperature range.
- Be sure to connect a safety wire to the fixture and mounting frame.
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the dedicated driver directly.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only.
- Calculate the capacity in accordance with JIS C8155 standard.
- The fixture is ceiling mounting exclusive use. Do not mount inclined ceilings or walls.

