


Discontinued product




SPECIFICATION

- Light Source LED Module (Mounted)
- Mounting Frame White(SWF)・Matte Black (SMF)
- WALL Cone White Cone(WC) Matte Black Cone(MC)
- Approved Driver Constant current (Sold Separately)
- Fixture Input Voltage 37.8V
- Fixture Input Current 0.9A MAX
- Weight 500g
- Attached Safety Wire

PRODUCT CODE

MSP-100W/WC/SWF/O/30B27/DL/3
 MSP-100W/WC/SWF/O/30B30/DL/3
 MSP-100W/WC/SWF/O/30B35/DL/3
 MSP-100W/WC/SWF/O/30B40/DL/3
 MSP-100W/MC/SWF・SMF/O/30B27/DL/3
 MSP-100W/MC/SWF・SMF/O/30B30/DL/3
 MSP-100W/MC/SWF・SMF/O/30B35/DL/3
 MSP-100W/MC/SWF・SMF/O/30B40/DL/3

(mm)

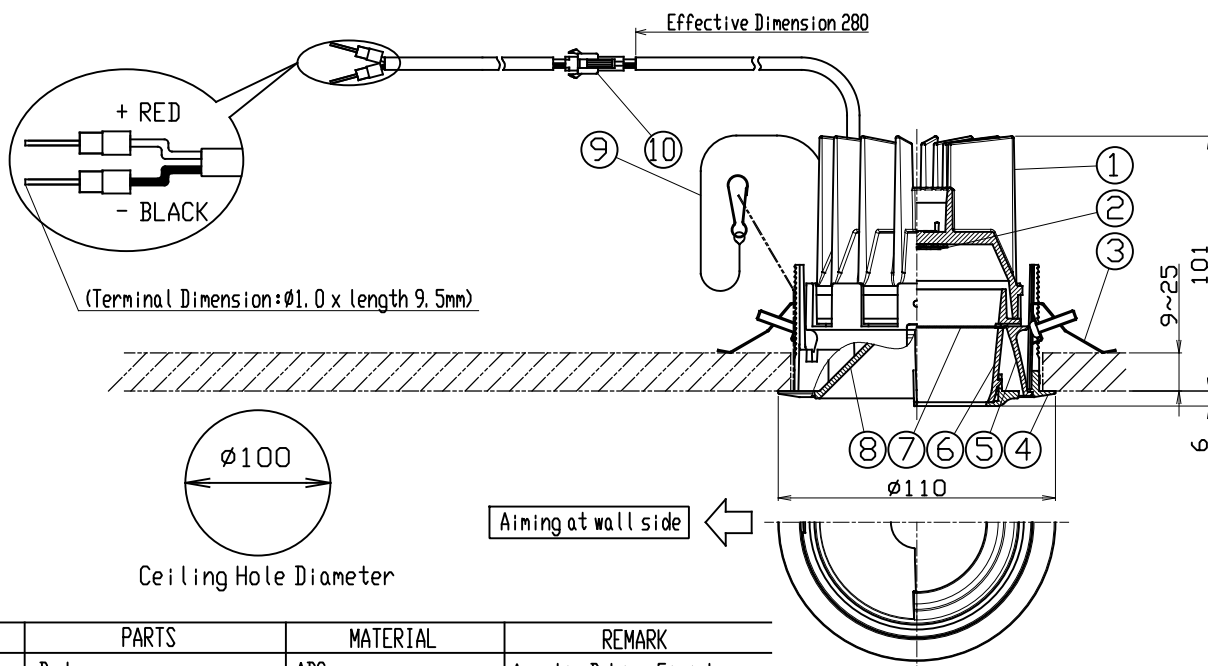

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Unit Mounting Spring	Stainless Steel	
4	Mounting Frame	ADC	Acrylic Baking Finish
5	Cone	ADC	Acrylic Baking Finish
6	Reflector	Resin	
7	Optical Filter	Resin	
8	WALL Cone	Resin	
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Keep distance of the fixtures and objects 0.2m or more.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the 'class2' driver. In that case, grounding is not required.