


Discontinued product




SPECIFICATION

- Light Source LED Module (Mounted)
- WALL Cone White Cone(WC)
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
- Input Current 0.200A (Dedicated driver input voltage, 220V input)
0.184A (Dedicated driver input voltage, 240V input)
- Power Consumption 39.6W (Included dedicated driver, 220V input)
39.8W (Included dedicated driver, 240V input)
- The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 37.8V
- Fixture Input Current 0.9A
- Dimming signal input current 2mA
- Weight 660g (Driver weight is included)
- Safety wire included


PRODUCT CODE

- MSP-100W/WC/FLF/0/30B27/Z2/3
- MSP-100W/WC/FLF/0/30B30/Z2/3
- MSP-100W/WC/FLF/0/30B35/Z2/3
- MSP-100W/WC/FLF/0/30B40/Z2/3
- MSP-100W/MC/FLF/0/30B27/Z2/3
- MSP-100W/MC/FLF/0/30B30/Z2/3
- MSP-100W/MC/FLF/0/30B35/Z2/3
- MSP-100W/MC/FLF/0/30B40/Z2/3

[mm]

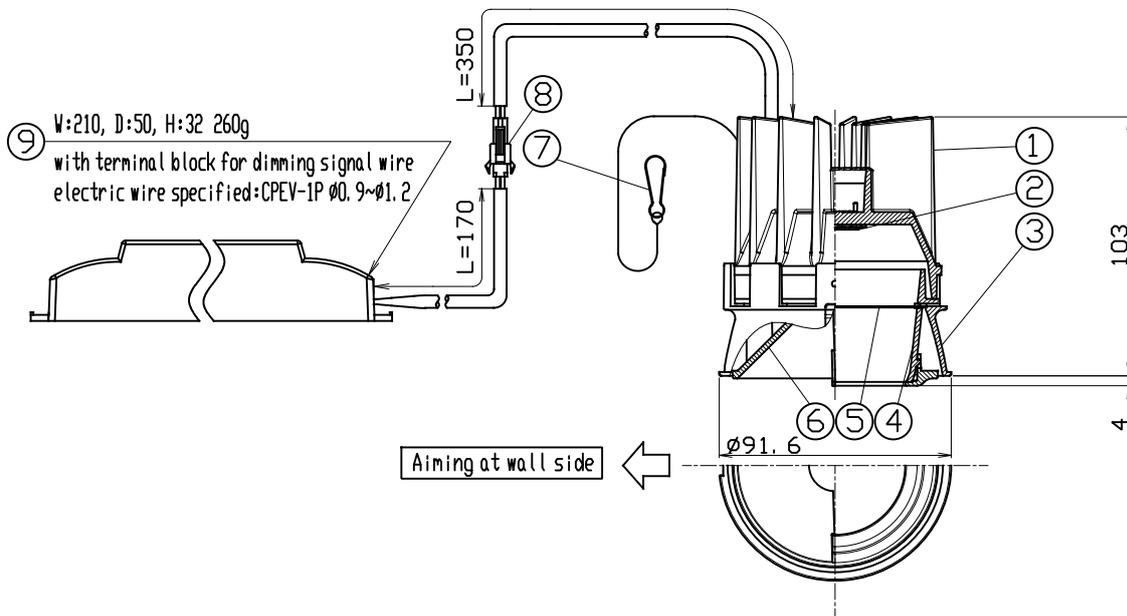

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Cone	ADC	Acrylic Baking Finish
4	Reflector	Resin	
5	Optical Filter	Resin	
6	WALL Cone	Resin	
7	Safety Wire	Stainless Steel	
8	Safety Connector	Resin	
9	Dedicated Driver		0-10V control dimming system

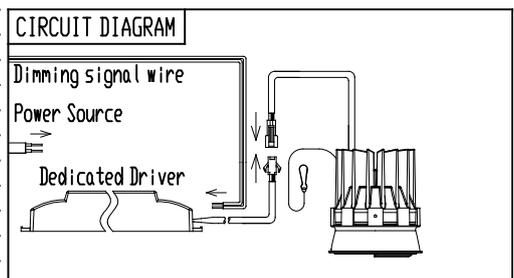

- ATTENTION**
- Emission color and brightness would be different even within the same model.
 - Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
 - Danger! Do not remodel fixtures.
 - Do not cover fixtures with the heat insulator etc.
 - Keep distance of the fixture and objects 0.2m or more.
 - Use within 0~35℃ ambient temperature range.
 - Connect a safety wire to the fixture and mounting frame directly.
 - Please use constant current driver.
 - There is no sending terminal block on the dedicated driver (primary side).
 - Connect input-side power wire to the approved driver directly.
 - Use 0-10V control dimming system (SR-2830AS-1-10) only.
 - Calculate the capacity in accordance with JIS C8155 standard.
 - The fixture is ceiling mounting exclusive use. Do not mount inclined ceilings or walls.

