


**Discontinued product**




**SPECIFICATION**

- Light Source LED Module (Mounted)  
White Cone(WC)  
Matte Black Cone(MC)
- Dedicated Driver Constant current ( 50/60Hz shared)
- Fixture Input Voltage 37.8V
- Fixture Input Current 0.9A (MAX)
- Weight 400g
- Attached Safety Wire

**PRODUCT CODE**

- MSP-100W/WC/FLF/0/30B27/DL/3
- MSP-100W/WC/FLF/0/30B30/DL/3
- MSP-100W/WC/FLF/0/30B35/DL/3
- MSP-100W/WC/FLF/0/30B40/DL/3
- MSP-100W/MC/FLF/0/30B27/DL/3
- MSP-100W/MC/FLF/0/30B30/DL/3
- MSP-100W/MC/FLF/0/30B35/DL/3
- MSP-100W/MC/FLF/0/30B40/DL/3

(mm)

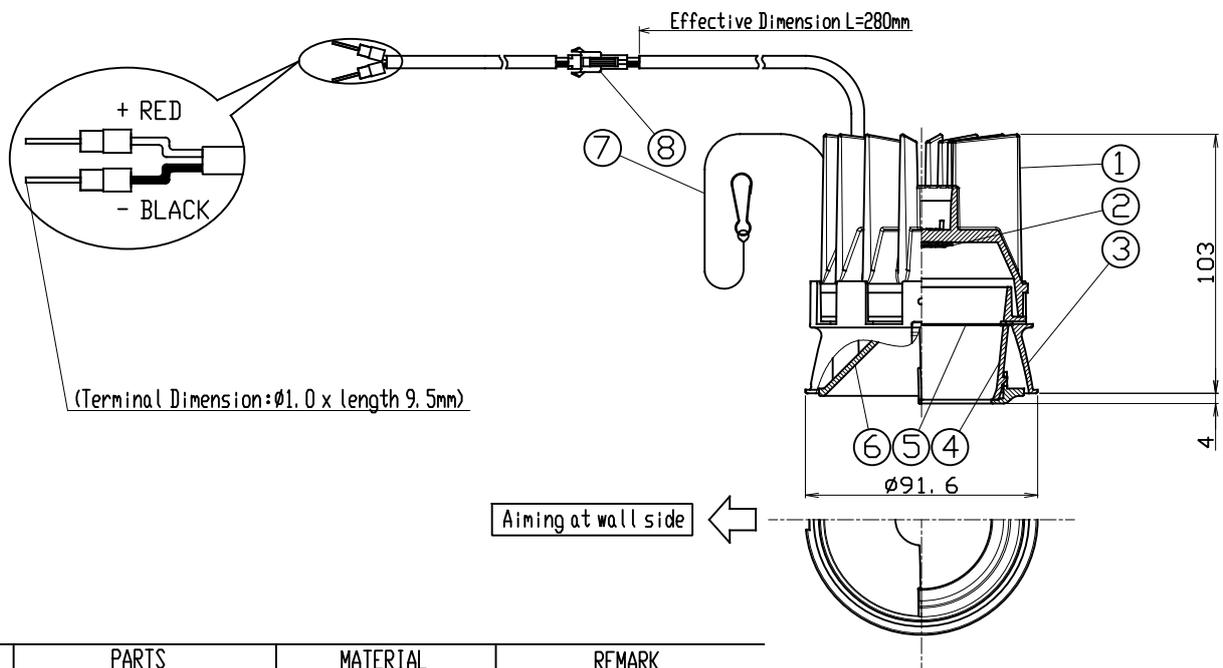

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	LED Module		
3	Cone	ADC	Acrylic Baking Finish
4	Reflector	Resin	
5	Optical Filter	Resin	
6	WALL Cone	Resin	
7	Safety Wire	Stainless Steel	
8	Safety Connector	Resin	

**ATTENTION**

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Keep distance of the fixtures and objects 0.2m or more.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.  
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the 'class2' driver. In that case, grounding is not required.