

SPECIFICATION

• Body	White(WC), Matte Black(MC), Silver(SC)
• Mounting Frame	White(W), Matte Black(M)
• Light Distribution	Narrow(ND), Medium(M), Wide(W)
• Vertical aiming angle	100°
• Horizontal aiming angle	360°
• Dedicated Driver	Constant current (50/60Hz shared)
• Fixture Input Voltage	19.5V
• Fixture Input Current	0.7A (MAX)
• Weight	330g


PRODUCT CODE

SL-535/80DF/N·M·W/R24B/WC/W/CE	SL-535/80DF/N·M·W/R24B/SC/W·M/CE
SL-535/80DF/N·M·W/R27B/WC/W/CE	SL-535/80DF/N·M·W/R27B/SC/W·M/CE
SL-535/80DF/N·M·W/R30B/WC/W/CE	SL-535/80DF/N·M·W/R30B/SC/W·M/CE
SL-535/80DF/N·M·W/R35B/WC/W/CE	SL-535/80DF/N·M·W/R35B/SC/W·M/CE
SL-535/80DF/N·M·W/R40B/WC/W/CE	SL-535/80DF/N·M·W/R40B/SC/W·M/CE
SL-535/80DF/N·M·W/R24B/MC/M/CE	
SL-535/80DF/N·M·W/R27B/MC/M/CE	
SL-535/80DF/N·M·W/R30B/MC/M/CE	
SL-535/80DF/N·M·W/R35B/MC/M/CE	
SL-535/80DF/N·M·W/R40B/MC/M/CE	

OPTION

Full diffuser lens	MLA-080/DF01
Semi diffuser lens	MLA-080/DS03
Full spread lens	MLA-080/SF01
Semi spread lens	MLA-080/SS01
Edge control filter	MLA-080/EC02

[mm]

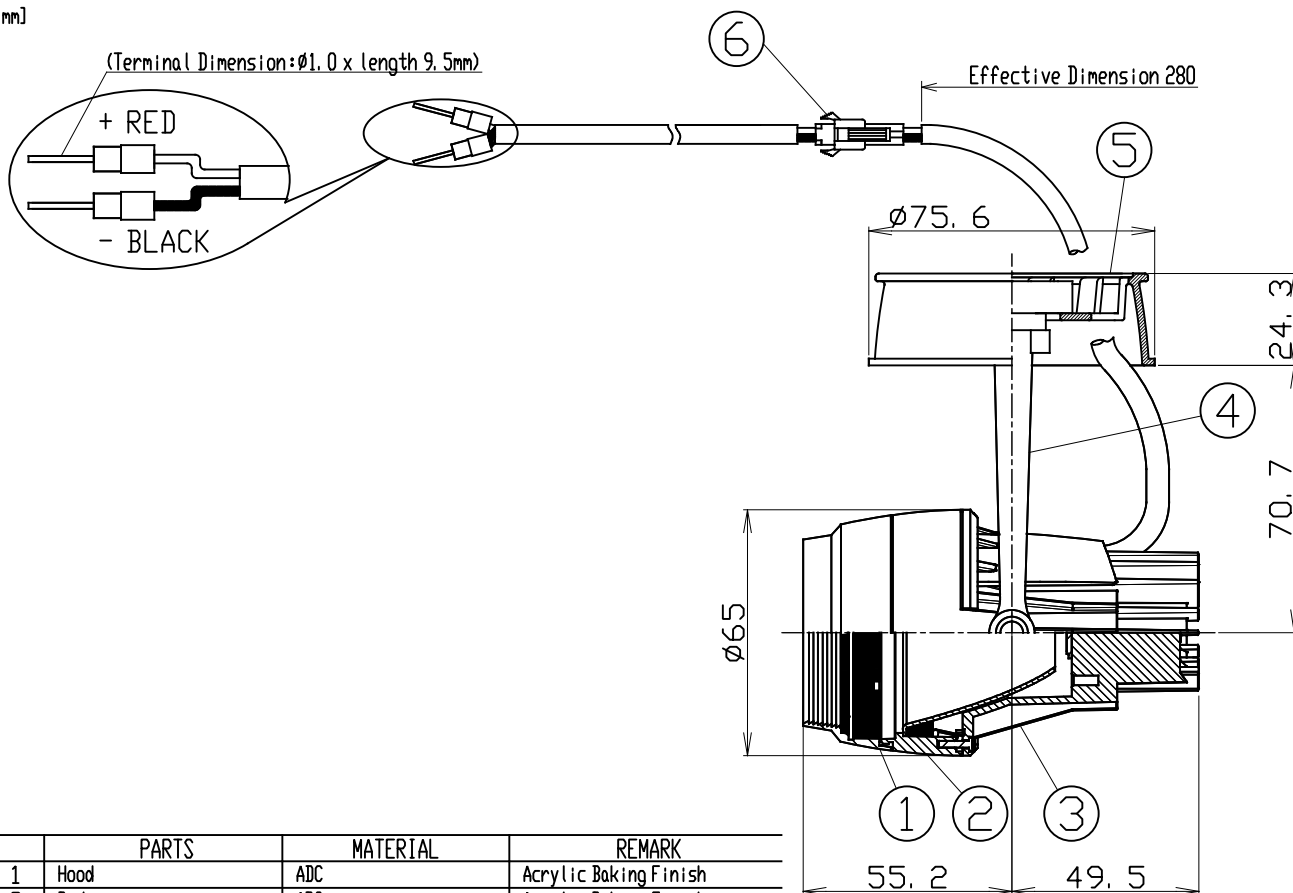

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Heat conductive body	ADC	Acrylic Baking Finish
4	Arm	Steel Plate	Acrylic Baking Finish
5	Cone	ADC	Acrylic Baking Finish
6	Safety Connector	Resin	

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Keep distance of the fixtures and objects 0.1m or more.
- Please do not remove safety connector