

SERIES


ModuleX[®]80

FUNCTION

for GRID 80

CAT, No.

SL-535/80DFC/CE



SPECIFICATION


- Body White(WC), Matte black(MC)
- Light Distribution Narrow(N), Medium(M), Wide(W)
- Vertical aiming angle 100 degree
- Horizontal aiming angle 360 degree
- Approved Driver Constant current (Sold Separately)
- Fixture Input Voltage 19.5V
- Fixture Input Current 0.7A MAX
- Weight 330g

PRODUCT CODE

- SX-535/80DFC/CE/N-W/R24B/MC-SC/W
- SX-535/80DFC/CE/N-W/R27B/MC-SC/W
- SX-535/80DFC/CE/N-W/R30B/MC-SC/W
- SX-535/80DFC/CE/N-W/R35B/MC-SC/W
- SX-535/80DFC/CE/N-W/R40B/MC-SC/W

OPTION

- Full diffuser lens MLA-080/DF01
- Semi diffuser lens MLA-080/DS03
- Full spread lens MLA-080/SF01
- Semi spread lens MLA-080/SS01
- Edge control filter MLA-080/EC02

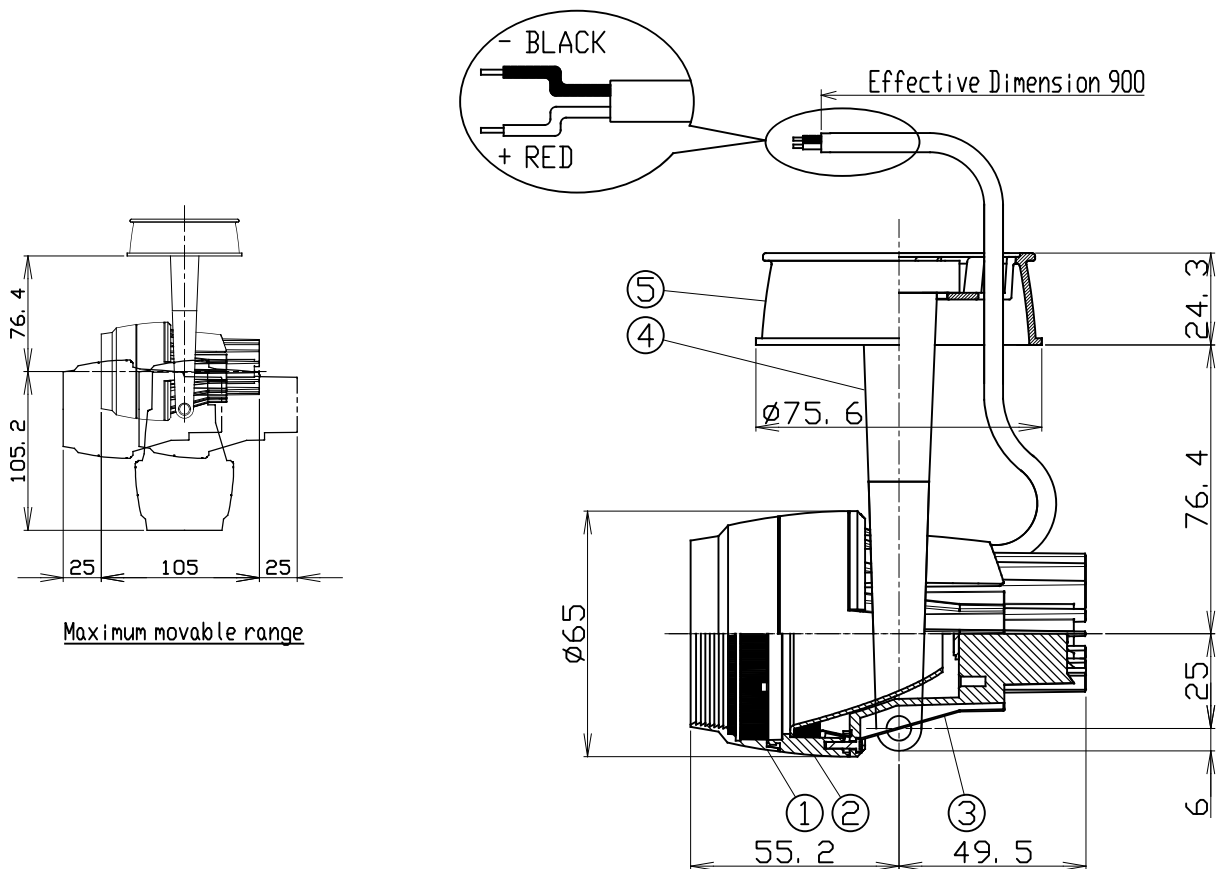

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Heat conductive body	ADC	Acrylic Baking Finish
4	Arm	Steel Plate	Acrylic Baking Finish
5	Cone	ADC	Acrylic Baking Finish

ATTENTION

- Use within 0t~35t ambient temperature range
- Emission color and brightness would be different even within the same model.
- Danger! Do not remodel fixtures.
- Do not use fixture without hood.
- To remove heat, place an air hole when installing the fixture in a fitting.
(Place air holes equally in the upper side of the fitting. Total aperture size should be more than 5% of the fitting's surface)
- Please use constant current driver.
- Keep distance of the fixtures and objects 0.1m or more.

ModuleX ModuleX Inc.	SPECIFICATION SHEET	SCALE	CREATED DATE	REVISION DATE
		1/2	28/12/2017	