

SERIES


ModuleX®80

FUNCTION

Adjustable Downlight

CAT, No

SL-B1652D/CE/BF



SPECIFICATION


- Light source LED Module (Installed)
- Light Distribution N-Narrow, M-Medium, W-Wide
- Cone Black Baffle Cone(BF)
- Vertical Aiming Angle 35°
- Horizontal Aiming Angle 360°
- Approved Driver Constant current (Sold separately)
- Fixture Input Voltage 19.5V
- Fixture Input Current 0.7A MAX
- Weight 250g
- Attached Safety Wire

PRODUCT CODE

SL-B1652D/CE/N·M·W/R24B/BF
 SL-B1652D/CE/N·M·W/R27B/BF
 SL-B1652D/NE/N·M·W/R30B/BF
 SL-B1652D/CE/N·M·W/R35B/BF
 SL-B1652D/CE/N·M·W/R40B/BF

OPTION

Full diffuser lens MLA-080/DF01
 Semi diffuser lens MLA-080/DS03
 Full spread lens MLA-080/SF01
 Semi spread lens MLA-080/SS01
 Edge control filter MLA-080/EC02

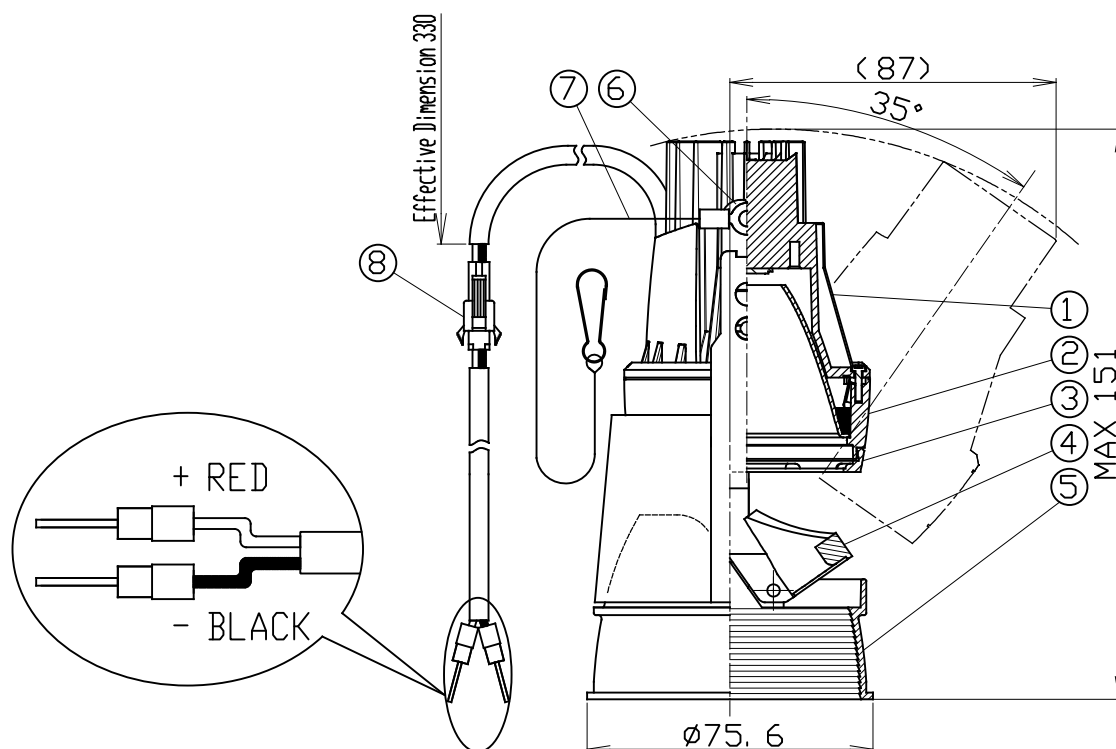

	PARTS	MATERIAL	REMARK
1	Heat Conduct Body	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Filter Holder	ADC	Acrylic Baking Finish
4	Fitting Arm	ADC	Acrylic Baking Finish
5	Cone	ADC	Acrylic Baking Finish
6	Joint Metal Fitting	Spring Material	
7	Safety Wire	Stainless Steel	
8	Safety Connector	Resin	

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the dedicated driver directly.
- Danger! Do not remodel fixtures.
- Use within 0~35℃ ambient temperature range
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Keep distance of the fixtures and objects 0.1m or more.
- Please do not remove safety connector

ModuleX®
 ModuleX Inc.

SPECIFICATION SHEET

SCALE
 1/2

CREATED DATE
 28/12/2017

REVISION DATE
 22/11/2019