

SERIES


**ModuleX® 60**

FUNCTION

Adjustable downlight

CAT. NO

SX-016PD/N/RB/CE





**SPECIFICATION**

- Light Source LED Module(Mounted)
- Frame White(W), Matte black(M)
- Vertical Aiming Angle MAX90°
- Horizontal Aiming Angle 355°
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 9.6V
- Fixture Input Current 0.48A (0.5A MAX)
- Weight 200g


**PRODUCT CODE**

- SX-016PD/N/R27B/W·M/CE
- SX-016PD/N/R30B/W·M/CE
- SX-016PD/N/R35B/W·M/CE
- SX-016PD/N/R40B/W·M/CE

(mm)

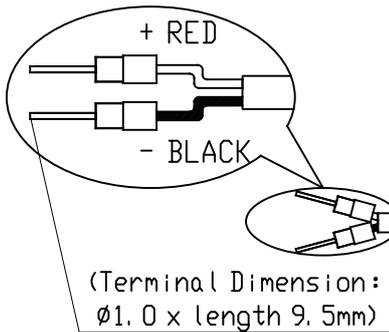

Ceiling Hole Diameter  
#ø60~ø61 for plaster board

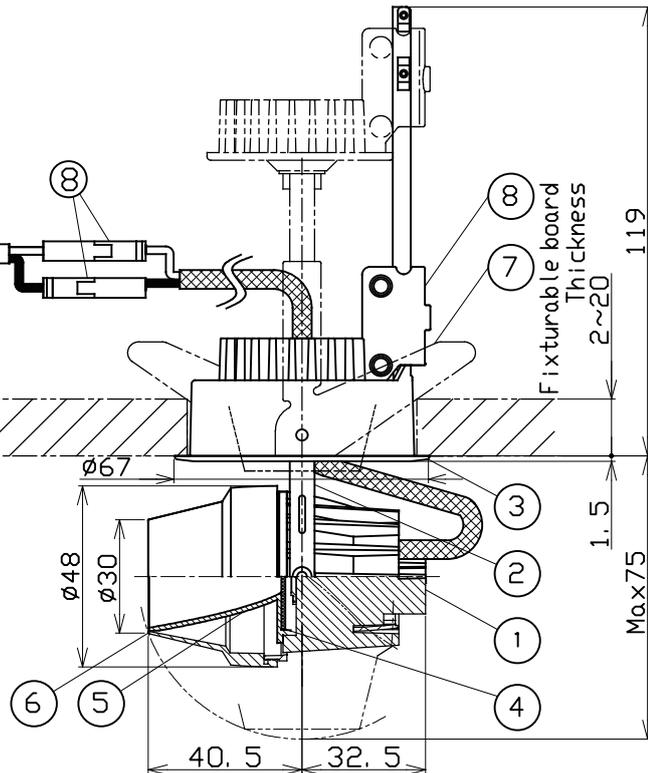

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	Arm	Zinc ADC	Acrylic Baking Finish
3	Frame	Zinc ADC	Acrylic Baking Finish
4	Filter	Resin	
5	Active reflector	Resin	Vapor deposition
6	Hood	ADC	Acrylic Baking Finish
7	Unit Mounting Spring	Stainless Steel	
8	Flange	Resin	
9	Safety Connector	Resin	

**ATTENTION**

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Emission color and brightness would be different even within the same model.
- Keep distance of the fixtures and objects 0.1m or more.
- Please do not remove safety connector.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the "class2" driver. In that case, grounding is not required.

**ModuleX®**  
ModuleX Inc.

SPECIFICATION SHEET

SCALE  
1/2

CREATED DATE  
1/APR/2020

REVISION DATE