


SPECIFICATION


- Light Source LED Module (Mounted)
- Frame White(W), Matte black(M)
- Vertical Aiming Angle MAX 90° (When pulled out)
- Horizontal Aiming Angle 355°
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
- Input current 0.089A(Dedicated driver input voltage, 220V input)
- Power Consumption 0.087A(Dedicated driver input voltage, 240V input)
- 16.8W(Included dedicated driver, 220V input)
- 17.0W(Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 19.5V
- Fixture Input current 0.7A
- Dimming signal input current 2mA
- Weight 390g(Includes dedicated driver)

PRODUCT CODE

- SX-016PD/Z102/N/R27B/W·M
- SX-016PD/Z102/N/R30B/W·M
- SX-016PD/Z102/N/R35B/W·M
- SX-016PD/Z102/N/R40B/W·M

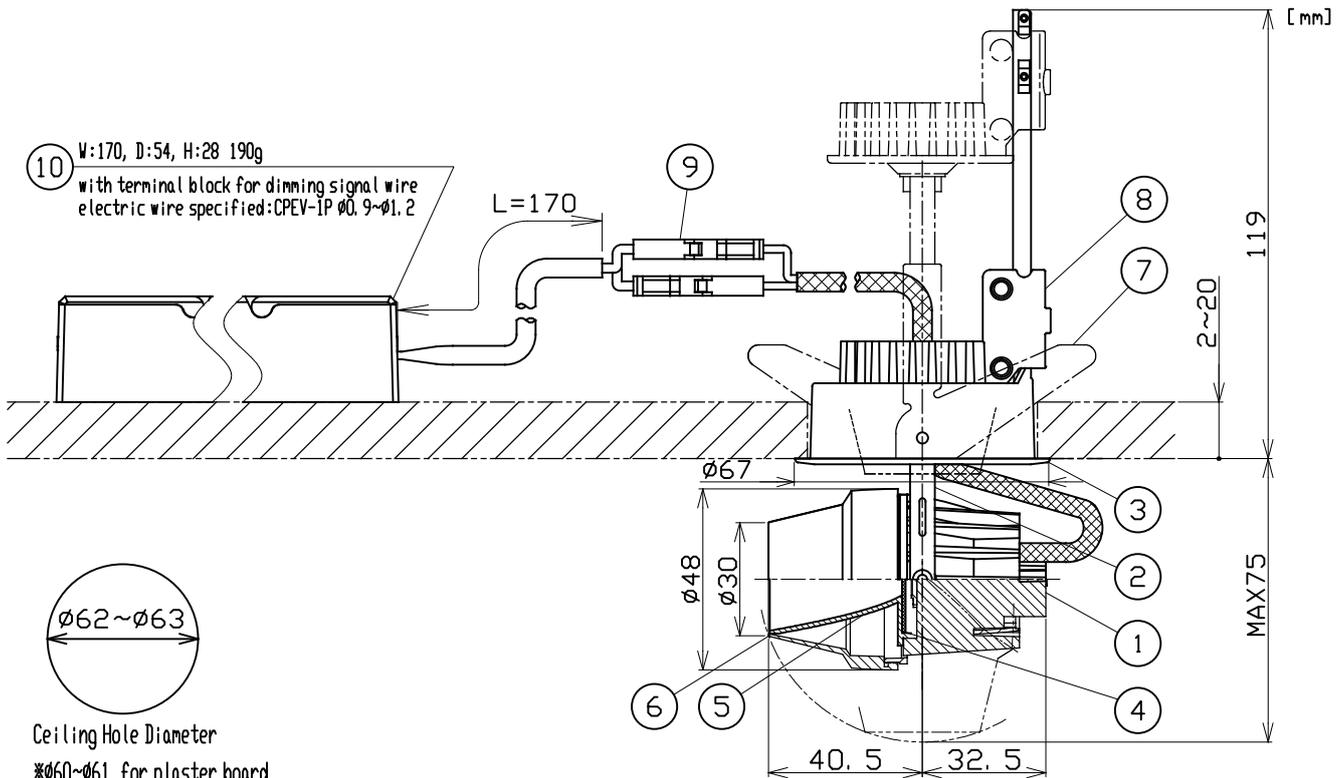

PARTS	MATERIAL	REMARK
1 Body	ADC	Acrylic Baking Finish
2 Arm	Zinc ADC	Acrylic Baking Finish
3 Frame	Zinc ADC	Acrylic Baking Finish
4 Filter	Resin	
5 Active reflector	Resin	Vapor deposition
6 Hood	ADC	Acrylic Baking Finish
7 Unit Mounting Spring	Stainless Steel	
8 Flange	Resin	
9 Safety Connector	Resin	
10 Dedicated Driver		0-10V control dimming system

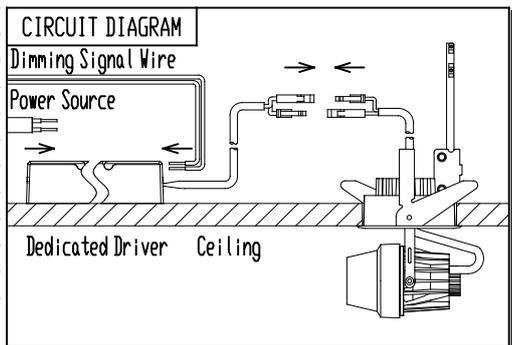

- ATTENTION**
- Please use constant current driver.
 - There is no sending terminal block on the dedicated driver (primary side).
 - Connect input-side power wire to the approved driver directly.
 - Danger! Do not remodel fixtures.
 - Do not cover fixtures with the heat insulator etc.
 - Keep distance of the fixtures and objects 0.1m or more.
 - Use within 0°C~35°C ambient temperature range.
 - Because there are variations in the LEDs, emission color and brightness would be different even within the same model.
 - Do not use a radio or TV near the fixture. The unit may generate noise in the radio or TV.
 - The height of inside the ceiling have to be 190mm or more to install the driver there.
 - When connecting to the electric circuit, calculate the capacity in accordance with JIS C8155 standard.
 - The fixture is ceiling mounting exclusive use. Do not mount inclined ceilings or walls.
 - Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only

